Standard components

Select

Learn about the Select component for use in UI extensions.

The `Select` component renders a dropdown menu select field where a user can select a single value. A search bar will be automatically included when there are more than seven options.

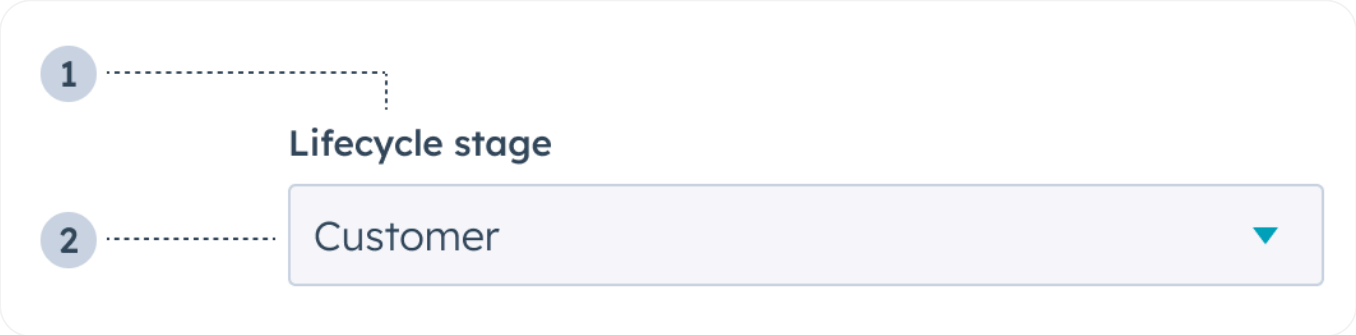

1. **Label:** the label that describes the field's purpose.
2. **Value:** the field's selected value.

HubSpot Developers

```
  const [validationMessage, setValidationMessage] = useState("");
  const [isValid, setIsValid] = useState(true);

  const options = [
    { label: "Bill", value: 42 },
    { label: "Ted", value: 43 },
  ];

  return (
    <Form>
      <Select
        label="Best Bill & Ted Character?"
        name="best-char"
        tooltip="Please choose"
        description="Please choose"
        placeholder="Bill or Ted?"
        required={true}
        error={!isValid}
        validationMessage={validationMessage}
        onChange={value => {
          setName(value);
          if (!value) {
            setValidationMessage("This is required");
            setIsValid(false);
          } else {
            setValidationMessage("Excellent!");
            setIsValid(true);
          }
        }}
        options={options}
      />
    </Form>
  );
};
```

Props

HubSpot Developers

›

		as an error message if provided. The input will also render its error state to let the user know there's an error. If left `false` (default), `validationMessage` is displayed as a success message.
`label`	String	The text that displays above the input.
`name`	String	The input's unique identifier.
`onChange`	`(value: string) => void`	A callback function that is invoked when the value is committed.
`onInput`	`(value: string) => void`	A callback function that is called and passed the value every time the search field is edited by the user. Prefer updating state in `onChange` as it fires less frequently, and if you need to update state here, consider debouncing your function.
`options`	Array	The options to display in the dropdown menu. `label` will be used as the display text, and `value` should be the option's unique identifier, which is submitted with the form.
`readOnly`	Boolean	When set to `true`, users will not be able to fill the input field. Default is `false`.
`required`	Boolean	When set to `true`, displays a required field indicator. Default is `false`.
`tooltip`	String	The text that displays in a tooltip next to the label.
`validationMessage`	String	The text to display if the input has an error.
`value`	String | number | boolean	The value of the input.
`variant`	`input` (default) | `transparent`	The visual style of the button

Variants

Using the variant prop, you can set the input to be one of two styles:

- `input` (default): a standard dropdown menu.

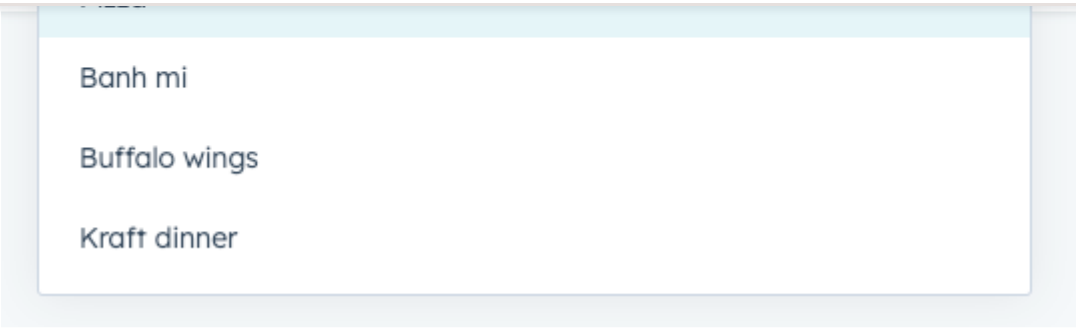

`transparent` : a hyperlink dropdown menu.

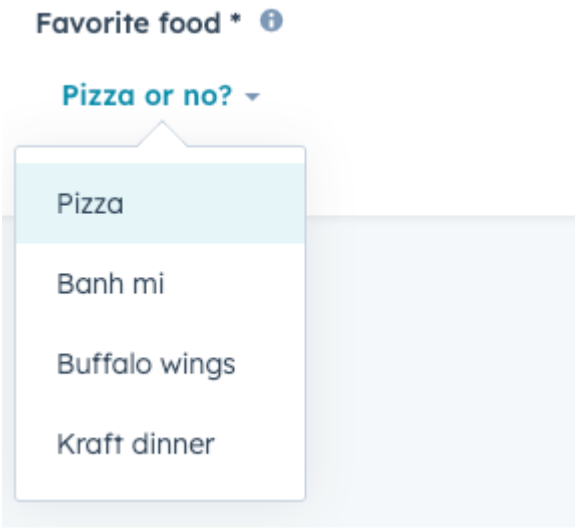

Usage examples

Use this type of field when there are a range of set options to choose from, such as:

- A list of products that can be purchased.
- A list of office locations to ship to.
- A list of delivery options for a vendor.

Guidelines

- **DO:** make label and description text concise and clear.
- **DO:** indicate if a field is required.
- **DO:** include clear validation error messages so that users know how to fix errors.

begin to type. Critical information should be placed in the label and descriptive text, with additional context in the tooltip if needed.

Related components

- Form
- Text
- TextArea

Last modified on January 28, 2026

Was this page helpful? Yes No

SearchInput | UI components
Previous

Spacer
Next

HubSpot Developers
Copyright © 2026 HubSpot, Inc

Privacy Policy

Security

Website Accessibility

Manage Cookies