Standard components

# StepperInput

Learn about the StepperInput component for use in UI extensions.

The `StepperInput` component renders a number input field that can be increased or decreased by a set number.

This component inherits many of its props from the `NumberInput` component, with an additional set of props to control the increase/decrease interval.

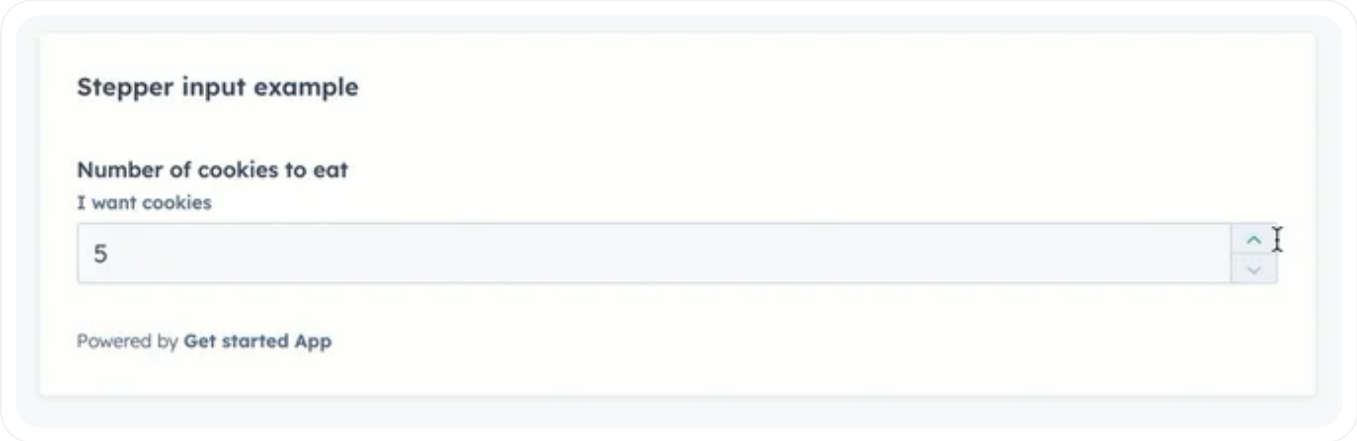

HubSpot Developers

```
    min={5}
    max={20}
    minValueReachedTooltip="You need to eat at least 5 cookies."
    maxValueReachedTooltip="More than 20 cookies is a bit much."
    label="Number of cookies to eat"
    name="cookiesField"
    description={"I want cookies"}
    value={cookies}
    stepSize={5}
    onChange={value => {
      setCookieCount(value);
    }}
  />
);
```

## Props

| Prop | Type | Description |
|---|---|---|
| `defaultValue` | String | The default input value. |
| `description` | String | Text that describes the field's purpose. |
| `error` | Boolean | When set to `true`, `validationMessage` is displayed as an error message if provided. The input will also render its error state to let the user know there's an error. If left `false` (default), `validationMessage` is displayed as a success message. |
| `formatStyle` | `'decimal'` (default) \| `'percentage'` | Formats the number as a decimal or percentage. |
| `label` | String | The text that displays above the input. |
| `max` | Number | The highest number allowed in the input. |
| `maxValueReachedTooltip` | String | Text that will appear in a tooltip when the user has reached the maximum value. |
| `min` | Number | The lowest number allowed in the input. |

HubSpot Developers

›

| | | |
|---|---|---|
| `onBlur` | `(value: number) => void` | A function that is called and passes the value when the field loses focus. |
| `onChange` | `(value: number) => void` | A callback function that is called with the new value or values when the list is updated. |
| `onFocus` | `(value: number) => void` | A function that is called and passed the value when the field gets focused. |
| `placeholder` | String | Text that appears in the input when no value is set. |
| `precision` | Number | The number of digits to the right of the decimal point. |
| `readOnly` | Boolean | When set to `true`, the checkbox cannot be selected. Default is `false`. |
| `required` | Boolean | When set to `true`, displays a required field indicator. Default is `false`. |
| `stepSize` | Number | The amount that the current value will increase or decrease by. Default is `1`. |
| `tooltip` | String | The text that displays in a tooltip next to the label. |
| `validationMessage` | String | The text to display if the input has an error. |
| `value` | String | The value of the input. |

## Related components

- Form
- DateInput
- NumberInput

Last modified on January 28, 2026

HubSpot Developers

StepIndicator

Previous

Table | UI components

Next

HubSpot Developers

Copyright © 2026 HubSpot, Inc

Privacy Policy

Security

Website Accessibility

Manage Cookies