Standard components

Table | UI components

Learn about the Table component for use in UI extensions.

The `Table` component renders a table for displaying and organizing data.

Below, learn how to implement buttons in a UI extension. For guidance on table design, check out the **Table design patterns**.

To format the table, you can use the following subcomponents:

- `TableHead` : the header section of the table containing column labels.
- `TableRow` : individual table rows.
- `TableHeader` : cells containing bolded column labels.
- `TableBody` : container for the main table contents (rows and cells).
- `TableCell` : individual cells within the main body.
- `TableFooter` : a row at the bottom of the table, typically to summarize the columns.

HubSpot Developers

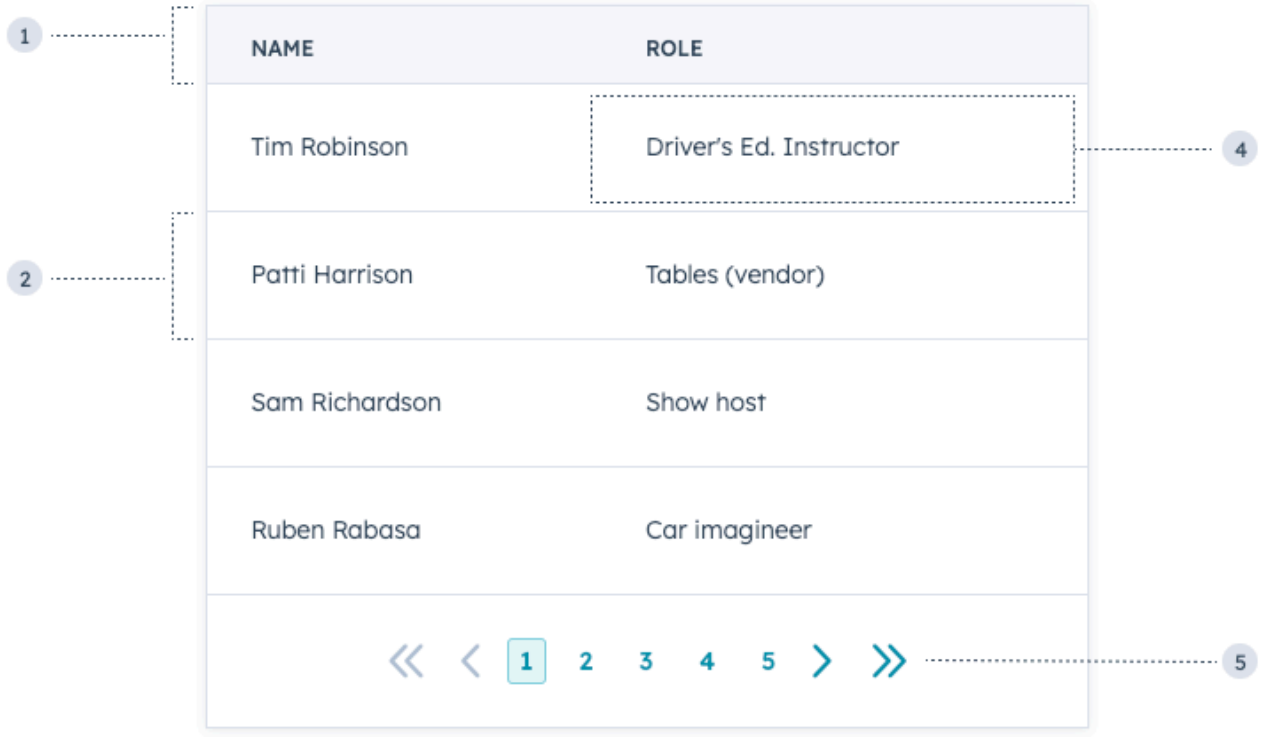

HubSpot Developers

```
    <Table bordered={true} paginated={true} pageCount="5">
      <TableHead>
        <TableRow>
          <TableHeader width="min">Name</TableHeader>
          <TableHeader width="min">Role</TableHeader>
        </TableRow>
      </TableHead>
      <TableBody>
        <TableRow>
          <TableCell width="min">Tim Robinson</TableCell>
          <TableCell width="min">Driver's Ed. Instructor</TableCell>
        </TableRow>
        <TableRow>
          <TableCell width="min">Patti Harrison</TableCell>
          <TableCell width="min">Tables (vendor)</TableCell>
        </TableRow>
        <TableRow>
          <TableCell width="min">Sam Richardson</TableCell>
          <TableCell width="min">Show host</TableCell>
        </TableRow>
        <TableRow>
          <TableCell width="min">Ruben Rabasa</TableCell>
          <TableCell width="min">Car imagineer</TableCell>
        </TableRow>
      </TableBody>
    </Table>
  );
};
```

Props

`<Table>` props

Prop	Type	Description
`bordered`	Boolean	When set to `false`, the table will not include borders. Default is `true`.

HubSpot Developers

›

	navigation. Default is `false` .See the **paginated tables** section for pagination props.

`<TableHeader>` props

Prop	Type	Description
`align`	`'center'` | `'left'` | `'right'`	Sets the alignment of a table header.
`sortDirection`	`'none'` (default) | `'ascending'` | `'descending'` | `'never'`	A visual indicator of the current direction in which the column is sorted. Does not modify the table data. See the **sortable tables** section for more sorting props.
`width`	Number | `'min'` | `'max'` | `'auto'`	Sets the width of a table header. `min` : the content will only be as wide as required, overflowing if the content is wider than the table. A horizontal scrollbar will appear when there is overflow. `max` : the content will expand to occupy the maximum available width without overflowing. `auto` : the content will adjust its width based on the available space without overflowing.

`<TableCell>` props

Prop	Type	Description
`align`	`'center'` | `'left'` | `'right'`	Sets the alignment of a table cell.
`colSpan`	Number	Sets the number of columns a cell should span.
`width`	Number | `'min'` | `'max'` | `'auto'`	Sets the width of a table cell. `min` : the content will only be as wide as required, overflowing if the content is wider

	`auto` : the content will adjust its width based on the available space without overflowing.

Paginated tables

To include paginated navigation below a table, set the `Table` prop `paginated` to `true` .

You'll then include the following props to further configure pagination:

Prop	Type	Description
`maxVisiblePageButtons`	Number	The maximum number of page buttons to display.
`onPageChange`	(pagenumber: number) => void	A function that is invoked when the page pagination button is clicked. It receives the new page number as an argument.
`page`	Number	Denotes the current page number.
`pageCount`	Number	The total number of pages available.
`showButtonLabels`	Boolean	When set to `false` , hides the text labels for First/Prev/Next buttons. The button labels will still be accessible to screen readers. Default is `true` .
`showFirstLastButtons`	Boolean	When set to `true` , displays the First/Last page buttons. Default is `false` .

Sortable tables

To add sorting functionality to a table, you can include the `sortDirection` and `onSortChange` props in the table's `TableHeader` components. To enable table data to

HubSpot Developers

>

SERIES	YEARS ON AIR	EMMYS
Arrested Development	4	5
M*A*S*H	11	14
The Simpsons	28	31
Totals	**43**	**50**

HubSpot Developers

```
hubspot.extend(() => <Extension />);

const ORIGINAL_DATA = [
  {
    name: "The Simpsons",
    yearsOnAir: 28,
    emmys: 31,
  },
  {
    name: "M*A*S*H",
    yearsOnAir: 11,
    emmys: 14,
  },
  {
    name: "Arrested Development",
    yearsOnAir: 4,
    emmys: 5,
  },
];

// Initial sort state: all columns are sortable but unsorted
const DEFAULT_SORT_STATE = {
  name: "none",
  yearsOnAir: "none",
  emmys: "none",
};

function Extension() {
  const [data, setData] = useState(ORIGINAL_DATA);
  const [sortState, setSortState] = useState({ ...DEFAULT_SORT_STATE });

  function handleOnSort(fieldName, sortDirection) {
    const dataClone = [...data];
    dataClone.sort((entry1, entry2) => {
      if (sortDirection === "ascending") {
        return entry1[fieldName] < entry2[fieldName] ? -1 : 1;
      }
      return entry2[fieldName] < entry1[fieldName] ? -1 : 1;
    });
```

HubSpot Developers

```
  return (
    <Table>
      <TableHead>
        <TableRow>
          <TableHeader sortDirection="none" onSortChange={sortDirection => hanc
            Series
          </TableHeader>
          <TableHeader sortDirection="none" onSortChange={sortDirection => hanc
            Years on air
          </TableHeader>
          <TableHeader sortDirection="none" onSortChange={sortDirection => hanc
            Emmys
          </TableHeader>
        </TableRow>
      </TableHead>
      <TableBody>
        {data.map(({ name, yearsOnAir, emmys }) => {
          return (
            <TableRow key={name}>
              <TableCell>{name}</TableCell>
              <TableCell>{yearsOnAir}</TableCell>
              <TableCell>{emmys}</TableCell>
            </TableRow>
          );
        })}
      </TableBody>
      <TableFooter>
        <TableRow>
          <TableHeader>Totals</TableHeader>
          <TableHeader>43</TableHeader>
          <TableHeader>50</TableHeader>
        </TableRow>
      </TableFooter>
    </Table>
  );
}
```

		Default is `false`.
`onSortChange`	`(value: "none" | "ascending" | "descending") => void`	A function that will be invoked when the header is clicked. It receives a `sortDirection` as an argument (cannot be none or a null value).
`sortDirection`	`'none'` (default) | `'ascending'` | `'descending'`	Visually indicates with an arrow which way the rows are sorted.

Usage examples

A client list containing names, phone numbers, job positions, and email addresses that salespeople can use to prioritize outreach.

A summary table of the deals closed last quarter.

Guidelines

DO: keep text within data cells clear and concise for easier scanning.

DO: always include a table header row to label columns.

DO: limit the use of links in table cells.

DON'T: use multiple tables on one screen when possible.

DON'T: render a blank table if there's no potential for no data to display, such as with search or filters. Instead, use the **EmptyState component** when there are no results to display.

Related components

DescriptionList

Statistics

CrmPropertyList

HubSpot Developers

StepperInput
Previous

Tabs | UI components
Next

HubSpot Developers
Copyright © 2026 HubSpot, Inc
Privacy Policy
Security
Website Accessibility
Manage Cookies