Standard components

Tabs | UI components

Learn about the Tabs component for use in UI extensions.

The `Tabs` component allows you to group related content into clickable tabs, with each `Tab` child component creating a new tab. Options are provided for visual variants, tooltip configuration, and more.

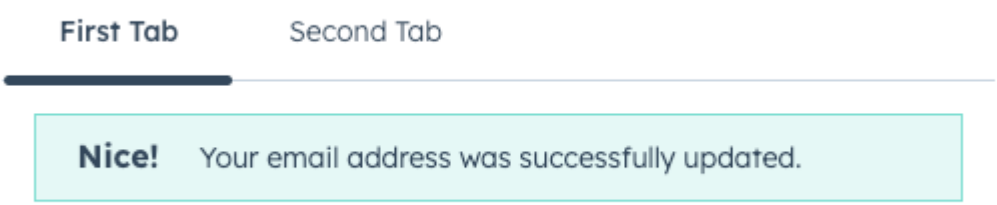


```
import { Alert, Tabs, Tab } from "@hubspot/ui-extensions";

// `defaultSelected` sets the initial tab,
// user controls changing tabs via clicking
const Extension = () => {
  return (
    <Tabs defaultSelected="first">
      <Tab tabId="first" title="First Tab">
        <Alert variant="success" title="Nice!">
          Your email address was successfully updated.
        </Alert>
      </Tab>
      <Tab tabId="second" title="Second Tab">
        Tab 2's content
      </Tab>
    </Tabs>
  );
};
```

HubSpot Developers

›

Prop	Type	Description
`defaultSelected`	String | Number	The ID of the tab to display by default (as set by the `Tab` 's `tabId` prop).
`fill`	Boolean	Whether the tabs should fill the available space.
`onSelectedChange`	`(selectedId: string | number) => void`	A function that gets invoked when the selected tab changes.
`selected`	String | Number	The currently selected tab ID, for **controlling the component via React state**.
`variant`	`default` | `enclosed`	Visual style of the tabs. See **variants** for more information.

`<Tab>` props

Prop	Type	Description
`disabled`	Boolean	Whether the tab should be disabled. When set to `false` , tab will be greyed out and not clickable.
`tabId`	String | Number	The tab's unique identifier.
`title`	String	The tab's title text.
`tooltip`	String	The text that appears in a tooltip on hover. Learn more about **tooltips**.
`tooltipPlacement`	`top` (default) | `bottom` | `left` | `right` |	Where the **tooltip** should appear, relative to the tab.

Once there are enough tabs to exceed the width of the container, HubSpot will automatically put overflowing tabs into a *More* dropdown menu, which users can click to select from the remaining tabs.

HubSpot Developers

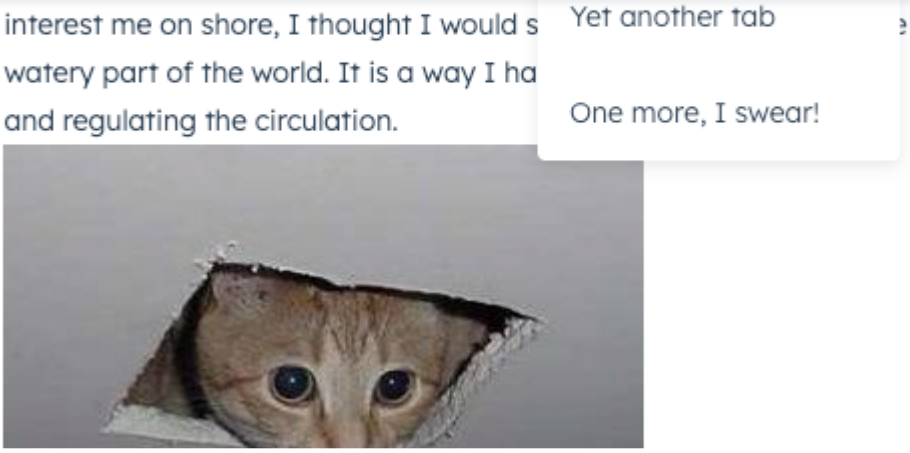

Variants

The `variant` prop provides two options for tab styling: `default` and `enclosed` .

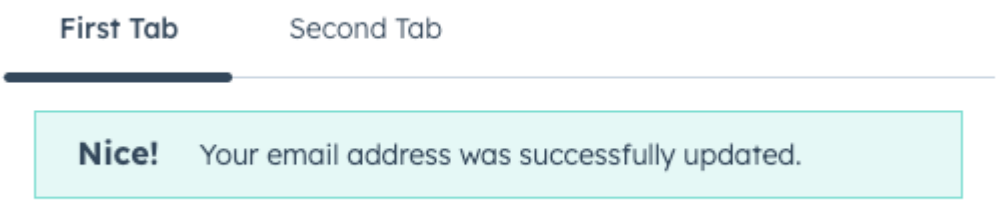


```
<Tabs
  variant="default"
  defaultSelected="first"
>
  <Tab tabId="first" title="First Tab">
    <Alert variant="success" title="Nice!">
      Your email address was successfully updated.
    </Alert>
  </Tab>
  <Tab tabId="second" title="Second Tab">
    Tab 2's content
  </Tab>
</Tabs>
```

HubSpot Developers

```
<Tabs
  variant="enclosed"
  defaultSelected="first"
>
  <Tab tabId="first" title="First Tab">
    <Alert variant="success" title="Nice!">
      Your email address was successfully updated.
    </Alert>
  </Tab>
  <Tab tabId="second" title="Second Tab">
    Tab 2's content
  </Tab>
</Tabs>
```

You can also set the `fill` prop to `true` to configure the tabs to take up the full width of the container.

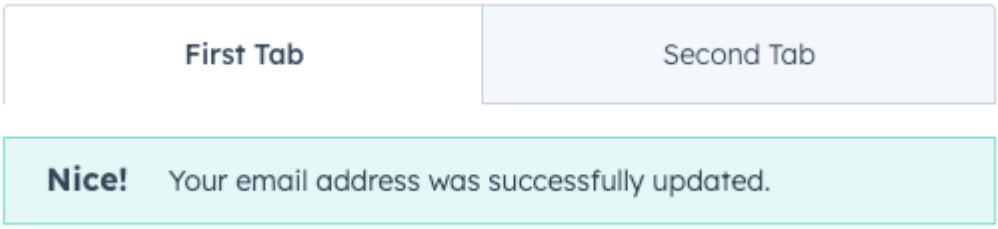

HubSpot Developers

```
>
  <Tab tabId="first" title="First Tab">
    <Alert variant="success" title="Nice!">
      Your email address was successfully updated.
    </Alert>
  </Tab>
  <Tab tabId="second" title="Second Tab">
    Tab 2's content
  </Tab>
</Tabs>
```

Tooltips

Use the `tooltip` prop to add tooltips to tabs on hover. By default, the tooltip will appear above the tab, but you can use the `tooltipPlacement` prop to configure it further.

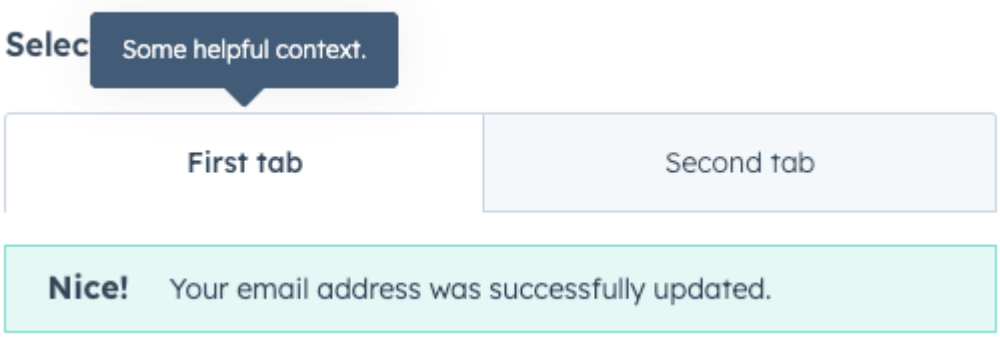

HubSpot Developers

```
    title="First Tab"
  >
    <Alert variant="success" title="Nice!">
      Your email address was successfully updated.
    </Alert>
  </Tab>
  <Tab tabId="second" title="Second Tab">
    Tab 2's content
  </Tab>
</Tabs>
```

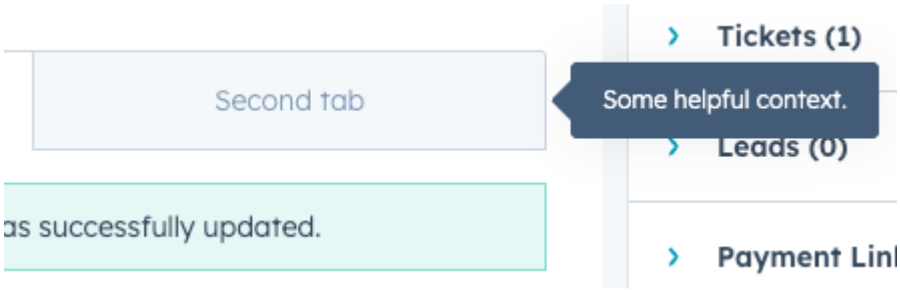


```
<Tabs variant="enclosed" defaultSelected="first">
  <Tab
    tooltip="Some helpful context."
    tooltipPlacement="right"
    tabId="first"
    title="First Tab"
    >
    <Alert variant="success" title="Nice!">
      Your email address was successfully updated.
    </Alert>
  </Tab>
  <Tab tabId="second" title="Second Tab">
    Tab 2's content
  </Tab>
</Tabs>
<Tab tooltip="Some helpful context." tooltipPlacement="right" tabId="second" ti
```

HubSpot Developers

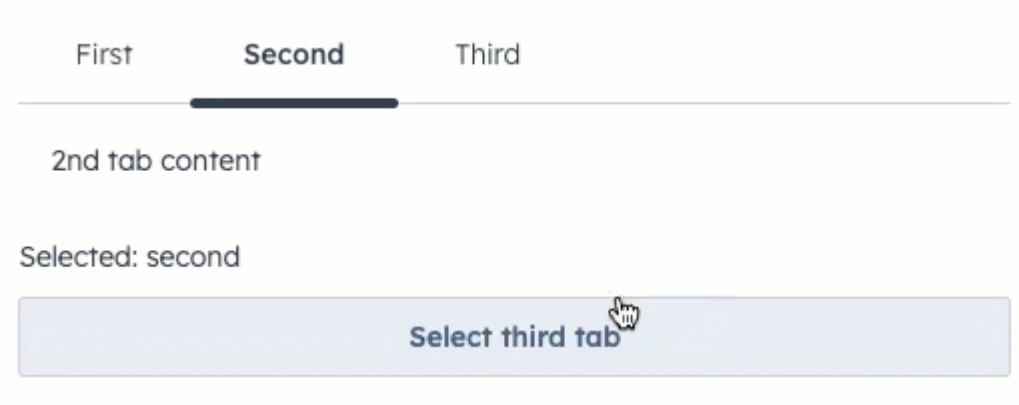


```
import React, { useState } from "react";
import { Tabs, Tab, Button, Text } from "@hubspot/ui-extensions";

// Uses `selected` and `onSelectedChange` props to handle updates

const BasicExtension = () => {
  const [selected, setSelected] = useState("second");
  return (
    <>
      <Tabs selected={selected} onSelectedChange={setSelected}>
        <Tab tabId="first" title="First">
          1st tab content
        </Tab>
        <Tab title="Second">2nd tab content</Tab>
        <Tab title="Third">3rd tab content</Tab>
      </Tabs>
      <Text>Selected: {selected}</Text>
      <Button onClick={() => setSelected("third")}>Select third tab</Button>
    </>
  );
};
```

HubSpot Developers

Table | UI components
Previous

Tag
Next

HubSpot Developers
Copyright © 2026 HubSpot, Inc
Privacy Policy
Security
Website Accessibility
Manage Cookies