Standard components

Tag

Learn about the Tag component for use in UI extensions.

The `Tag` component renders a tag to label or categorize information or other components. Tags can be static or clickable for invoking functions.

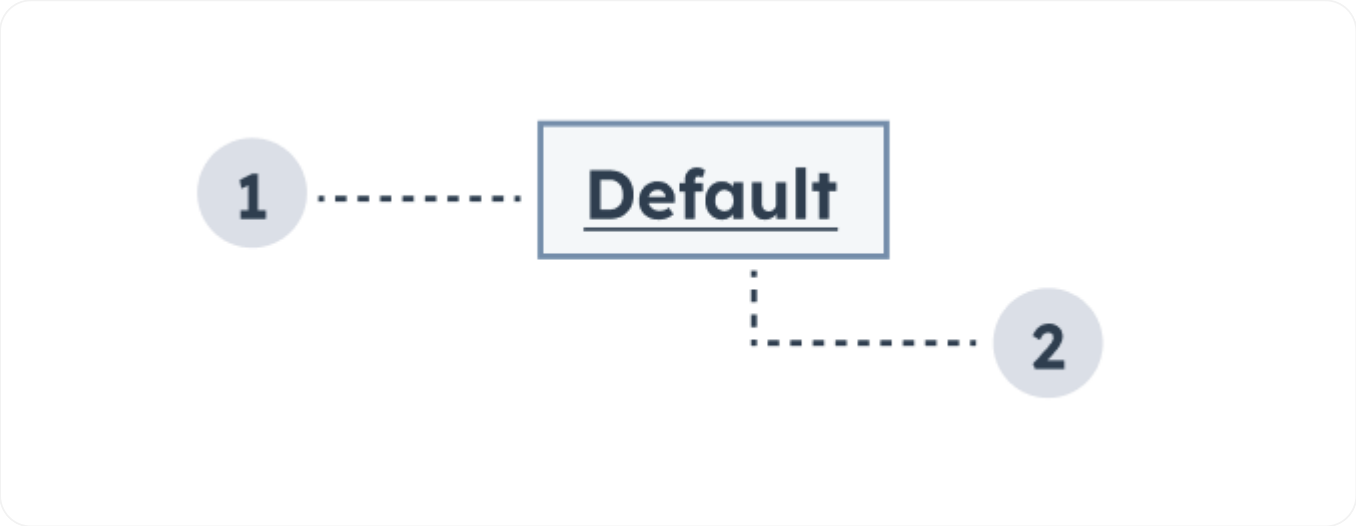

1. **Variant:** the color of the tag.
2. **Tag text:** the text that communicates the tag's purpose.

HubSpot Developers

```
    <Tag
      variant="success"
      onClick={() => {
        console.log("Tag clicked!");
      }}
      inline={true}
    >
      Success
    </Tag>
  );
};
```

Props

Prop	Type	Description
`onClick`	`() => void`	A function that will be invoked when the tag is clicked. The function receives no arguments and its return value is ignored.
`overlay`	Object	Include a or component in this object to open it as an overlay on click. Learn more about .
`variant`	`'default'` (default) | `'warning'` | `'success'` | `'error'` | `'info'`	The color of the alert. See the for more information.

Variants

Using the `variant` prop, you can choose from one of five tag colors:

- `default` (default): for general tagging and labeling.
- `success` : for indicating or confirming the success of an action.

HubSpot Developers

›

Alignment

Using the `inline` prop, you can set a tag to align side-by-side with surrounding text. Below are examples of inline tags next to single-line text and multi-line text.

```
<Text>Some text over here</Text>;
```

```
<Text>
  Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nam ac rhoncus velit
  ligula quis risus vehicula mattis id vitae orci. Suspendisse sed mattis metus
</Text>;
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nam ac rhoncus velit, non tincidunt tortor. Aliquam nec ligula quis risus vehicula mattis id vitae orci. **In Review** Suspendisse sed mattis metus, id iaculis enim. Cras nisl erat, pulvinar sit amet nisl sit amet, feugiat pharetra urna.

```
<Text>
  Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nam ac rhoncus velit
  ligula quis risus vehicula mattis id vitae orci. Suspendisse sed mattis metus
  pulvinar sit amet nisl sit amet, feugiat pharetra urna.
</Text>;
```

Usage examples

Use a `default` tag to indicate that a customer is active.

Use a `success` tag to indicate that an item in a to-do list has been completed.

Use a `warning` tag to indicate that a deal is expiring soon.

DO: make tag text concise and clear.

DO: ensure that tag variants are used consistently across the extension.

DON'T: use tags in place of buttons or links.

DON'T: rely on color alone to communicate the tag's meaning. Ensure that tag text is clear and helpful.

Related components

Toggle

Alert

ProgressBar

Last modified on January 28, 2026

Was this page helpful? Yes No

Tabs | UI components
‹ Previous

Text
Next ›

HubSpot Developers

HubSpot Developers
Copyright © 2026 HubSpot, Inc
Privacy Policy
Security
Website Accessibility
Manage Cookies