Standard components

TimeInput | UI components

Learn about the TimeInput component for use in UI extensions.

The `TimeInput` component renders an input field where a user can select a time of day. Includes options for customizing the selectable time range, timezone display, and more.

Below is an example of using both `TimeInput` and `DateInput` together to allow users to schedule appoints by date and time. Note the `setValidAppointmentTimes` logic to set the available time ranges based on the selected date.

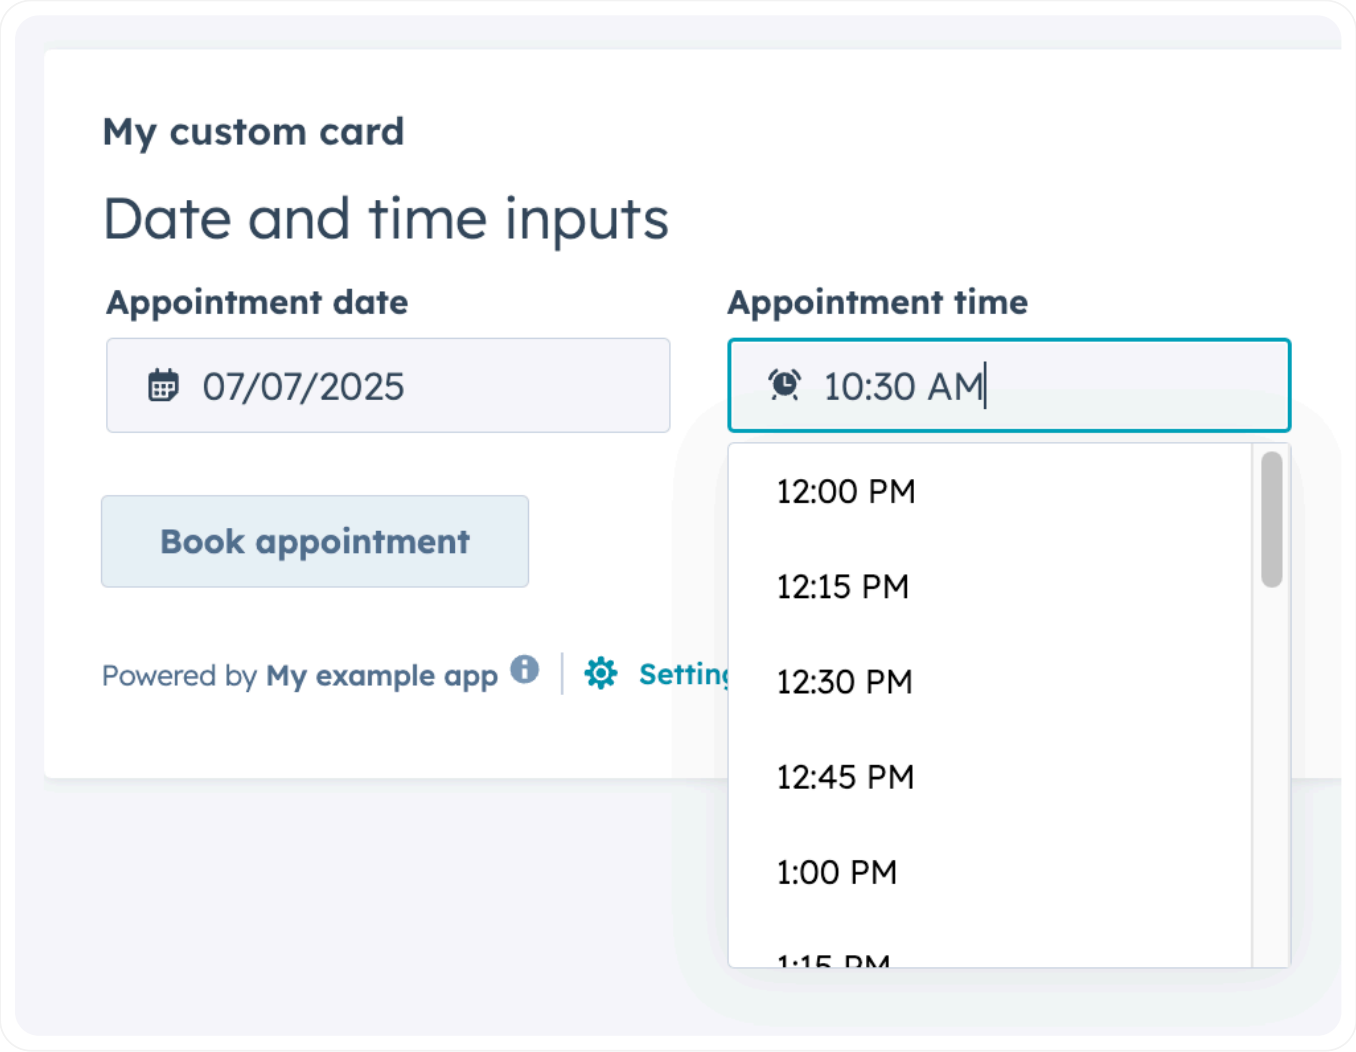

HubSpot Developers

```
function Extension() {
  const [dateRange] = useState({
    start: { year: 2025, month: 6, date: 7 },
    end: { year: 2025, month: 6, date: 11 },
  });

  const [timeRange, setTimeRange] = useState({
    start: { hours: 7, minutes: 15 },
    end: { hours: 16, minutes: 0 },
  });

  const [selectedDate, setSelectedDate] = useState({ year: 2025, month: 6, date
  const [selectedTime, setSelectedTime] = useState({ hours: 10, minutes: 30 });

  const areDatesEqual = (firstDate, secondDate) => {
    return (
      firstDate.date === secondDate.date && firstDate.month === secondDate.mont
    );
  };

  const setValidAppointmentTimes = date => {
    console.log({ date });
    console.log({ dateRangeStart: dateRange.start });
    // Rudimentary "don't allow early on Monday and late on Friday" logic
    if (areDatesEqual(date, dateRange.start)) {
      console.log("selected start of date range");
      setTimeRange({ start: { hours: 12, minutes: 0 }, end: { hours: 16, minute
    } else if (areDatesEqual(date, dateRange.end)) {
      console.log("selected end of date range");
      setTimeRange({ start: { hours: 8, minutes: 15 }, end: { hours: 12, minute
    } else {
      console.log("selected another date");
      setTimeRange({ start: { hours: 8, minutes: 15 }, end: { hours: 16, minute
    }
  };

  return (
    <>
```

HubSpot Developers

```
              value={selectedDate}
              label={"Appointment date"}
              name={"appointment-date-selection"}
              min={dateRange.start}
              max={dateRange.end}
              onChange={value => {
                console.log({ value });
                setSelectedDate({ year: value.year, month: value.month, date: v
                setValidAppointmentTimes({ year: value.year, month: value.month
              }}
              timezone="portalTz"
            />

            <TimeInput
              value={selectedTime}
              label={"Appointment time"}
              name={"appointment-time-selection"}
              min={timeRange.start}
              max={timeRange.end}
              interval={15}
              onChange={value => {
                setSelectedTime(value);
              }}
            />
          </Flex>
          <Button
            onClick={() => {
              console.log({ selectedDate, selectedTime });
            }}
          >
            Book appointment
          </Button>
        </Flex>
      </Form>
    </>
  );
}
```

HubSpot Developers

›

		`value` field.
`description`	String	Text that describes the field's purpose.
`error`	Boolean	When set to `true`, `validationMessage` is displayed as an error message if provided. The input will also render its error state to let the user know there's an error. If left `false` (default), `validationMessage` is displayed as a success message.
`interval`	Number	Sets the interval (in minutes) between the dropdown options.
`label`	String	The text that displays above the input.
`max`	Object	A Sets the latest valid time available.
`min`	Object	Sets the earliest valid time available.
`name`	String	The input's unique identifier.
`onBlur`	`(value: TimeInputEventsPayload) => void`	A function that is called and passes the value when the field loses focus.
`onChange`	`(checked: boolean, value: string) => void`	A callback function that is invoked when the value is committed. Currently, this occurs on `onBlur` of the input and when the user submits the form.
`onFocus`	`(value: TimeInputEventsPayload) => void`	A function that is called and passed the value when the field gets focused.
`readOnly`	Boolean	When set to `true`, the input cannot be edited.
`required`	Boolean	When set to `true`, displays a required field indicator.
`timezone`	`'userTz'` (default) | `'portalTz'`	Sets the timezone that the component will use to calculate valid times. `userTz` (default): the user's time zone. `portalTz`: the account's default time zone.
`tooltip`	String	The text that displays in a tooltip next to the label.

HubSpot Developers

Related components

- Form
- DateInput
- NumberInput

Last modified on January 28, 2026

Was this page helpful? Yes No

Tile
Previous

Toggle
Next

HubSpot Developers
Copyright © 2026 HubSpot, Inc
Privacy Policy
Security

Website Accessibility

Manage Cookies