

University of Central Florida



Tyler Mark, X, X

```
1 Contest
                                                         1
2 Data structures
                                                         \mathbf{2}
3 Geometry
                                                         3
4 Graphs
                                                         4
5 Mathematics
                                                         5
6 Numerical Methods
                                                         6
7 Strings
                                                         7
Contest (1)
template.cpp
#include <bits/stdc++.h>
#define all(x) begin(x), end(x)
using namespace std;
\#define rep(i, a, b) for(int i = a; i < (b); ++i)
#define sz(x) (int) (x).size()
\#define all(x) begin(x), end(x)
using ll = long long;
using ld = long double;
using pii = pair<int, int>;
using vi = vector<int>;
using vii = vector<pii>;
using vvi = vector<vi>;
int main() {
   cin.tie(0)->sync_with_stdio(0);
```

cin.exceptions(cin.failbit);

return 0;

UCF	template	
$\underline{\text{Data structures}} \ (2)$		

Geometry (3)

point.h

Description: Handles vector/point operations in the cartesian plane. Works for any type. Ints may cause errors with integer division.

68f17b, 21 lines

```
const 1d eps = 1e-9; //tolerance based on problem
const ld inf = 1e18;
template<class T> struct pnt {
    T x, y;
    pnt(T _x = 0, T _y = 0): x(_x), y(_y) {}
    bool operator<(pnt o) { return tie(x, y) < tie(o.x, o.y); }</pre>
    pnt operator+(pnt o) { return pnt(x + o.x, y + o.y); }
    bool operator == (pnt o) const { return abs(x-o.x) < eps &&
        abs(y-o.y) < eps; }
    pnt operator-(pnt o) { return pnt(x - o.x, y - o.y); }
    pnt operator*(T c) { return pnt(x*c, v*c); }
    T dot(pnt o) { return x*o.x + y*o.y;
    T cross(pnt o) { return x*o.y - y*o.x; }
    T cross(pnt o1, pnt o2) { return (o1-*this).cross(o2-*this)
        ; }
    T mag2() { return dot(*this); }
    ld mag() { return sqrtl(dist2()); }
    pnt unit() { return *this * (1/dist()); }
   pnt perp() { return pnt(-y, x); }
   pnt norm() { return perp().unit();
    ld ang() { return atan21(y, x); }
};
```

3.1 Lines and Segments

sideOf.h

Description: Checks what side of the line a point is on. Returns -1 if the point is left, 1 if right, and 0 if on the line. Orientation is based off the unit vector of the line

6c1c12, 4 lines

```
template<class P> int sideOf(P s, P e, P p) {
   auto cp = s.cross(e, p);
   return (cp > eps) - (cp < -eps);
}</pre>
```

onSeg.h

Description: Returns whether or not a point is on a segment c2edf6, 3 line

```
template<class P> bool onSeg(P s, P e, P p) {
    return abs(s.cross(e, p)) < eps && (s-p).dot(e-p) < eps;
}</pre>
```

lineIntersection.h

Description: Returns the intersection point of two lines using cramers rule. If the lines are parallel or are the same, (inf, inf) is returned.

```
template < class P > P lineInter(P s1, P e1, P s2, P e2) {
   auto det = -(e1-s1).cross(e2-s2);
   if(abs(det) < eps) return P(inf, inf);
   auto t = (e2-s2).cross(s2-s1) / det;
   return s1 + (e1-s1) * t;
}</pre>
```

doSegIntersection.h

Description: Checks if two segments intersect (inclusive of intersections at endpoints)

50e2c4.4 lines

segIntersection.h

```
Description: Returns the intersection point of two segments.
```

Usage: Returns a vector of points. If no points, there is no

lineDistance.h

Description: Gets the distance between a point and a line.

853d96

```
template<class P> ld lineDist(P s, P e, P p) {
   return (e-s).cross(p-s) / (e-s).mag();
}
```


segDistance.h

Description: Gets the distance between a point and a segment d02cd5, 5 lines

```
template<class P> ld segDist(P s, P e, P p) {
   if(s == e) return (p - s).mag();
   auto d = (e-s).mag2(), t = min(d, max(0.0, (p-s).dot(e-s)))
   ;
   return ((p - s)*d - (e - s)*t).mag() / d;
}
```

UCF Graphs (4)

UCF	
$\underline{\text{Mathematics}}$ (5)	
、	
	I

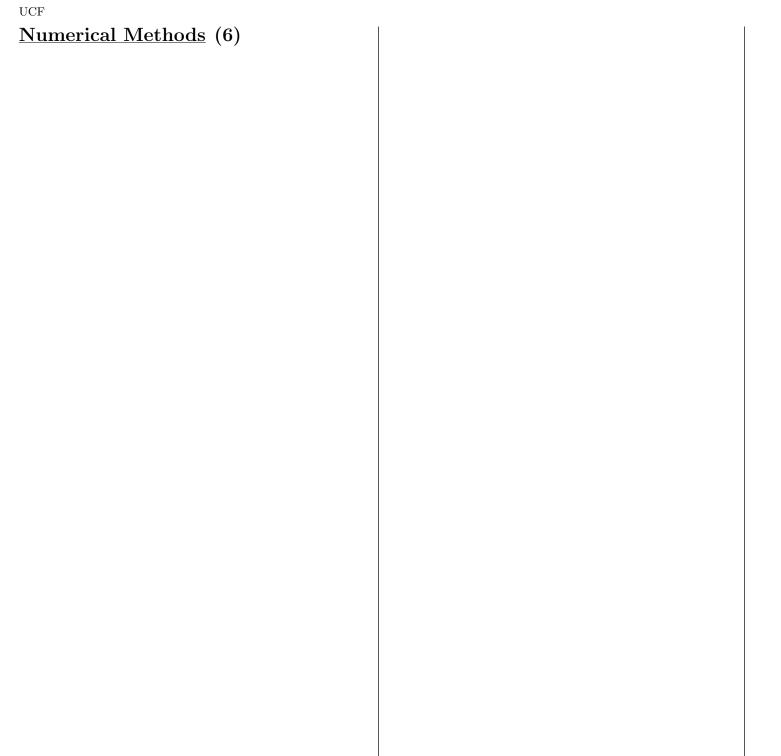

UCF $\underline{\text{Strings}}$ (7)