

Repository Activity Report: scottyab/rootbeer

Daniela Lopez | CS 472

Analysis Overview


This report summarizes development activity in the scottyab/rootbeer repository, an open-source Android root-detection library.

Using the GitHub API, we identified 36 source files (Java, Kotlin, and native C++ files used for root/tamper detection) and collected every commit that touched them, recording the author, date, and file for each change. In total, 176 distinct author-file-week activity points were recorded across the repository's history. The goal is to surface where development effort concentrates, how the codebase has evolved, and where maintenance risk may exist.

Key Findings

- **RootBeer.java is the clear activity hotspot:** It shows dense, sustained activity from week 0 through roughly week 260, touched by far more contributors than any other file in the repository. Because RootBeer.java contains the library's main detection logic, it makes sense that it gets a lot of changes. However, relying so heavily on one file also means that a mistake or bug in that file could have a bigger impact on the project.
- **A visible shift toward Kotlin begins around week 300:** Several Kotlin files, including MainActivity.kt, RootSampleApp.kt, and ScopedActivity.kt, were first changed around weeks 300–310, which was fairly late in the repository's history. This suggests that the sample app gradually moved from Java to Kotlin rather than being built with Kotlin from the beginning.
- **Two contributors, stealthcopter and scottyab, account for the large majority of activity:** Their commits are spread across almost every source file and cover most of the project's timeline. In comparison, some files, especially the native C++ JNI files and a few older Java utility files, were only changed once or twice, often by the same person. This could be a concern because if the people who worked on those files are no longer involved, there may be less knowledge available to maintain or troubleshoot them.

Visualization

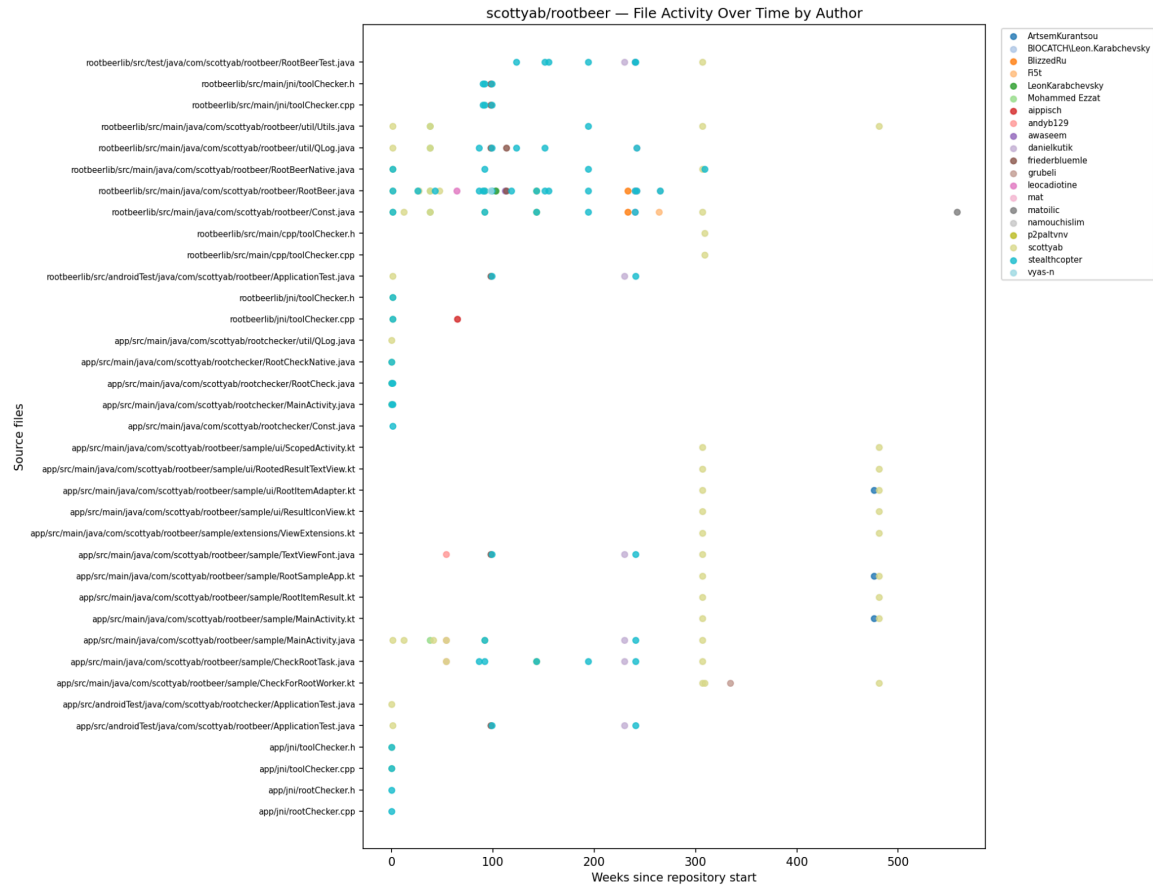

Limitation

For this analysis, we considered “source files” to be files ending in .java, .kt, .cpp, or .h. We left out things like build configuration, Android resource and manifest files, and documentation. This gives us a good way to focus on the project’s main code, but it also means we’re not capturing some maintenance work, such as updating dependencies or changing build tools. These tasks can still take up a significant amount of maintenance time even though they aren’t included in this analysis.