

Introduction to Java for C++ Programmers

Segment – 2

JAC 444

Professor: Mahboob Ali

Inheritance

Definition:

A *subclass* is a class that extends another class.


A subclass inherits state and behavior from all its ancestor.

The *superclass* refers to a direct ancestor.


Subclass inherits all, but private superclasses members

```
public class SuperClass
{ ... }

public class SubClass extends SuperClass {
    ...
}
```

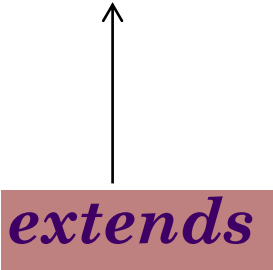A vertical arrow points from the word 'extends' in the SubClass declaration to the SuperClass declaration, indicating that SubClass inherits from SuperClass.

Superclasses and Subclasses

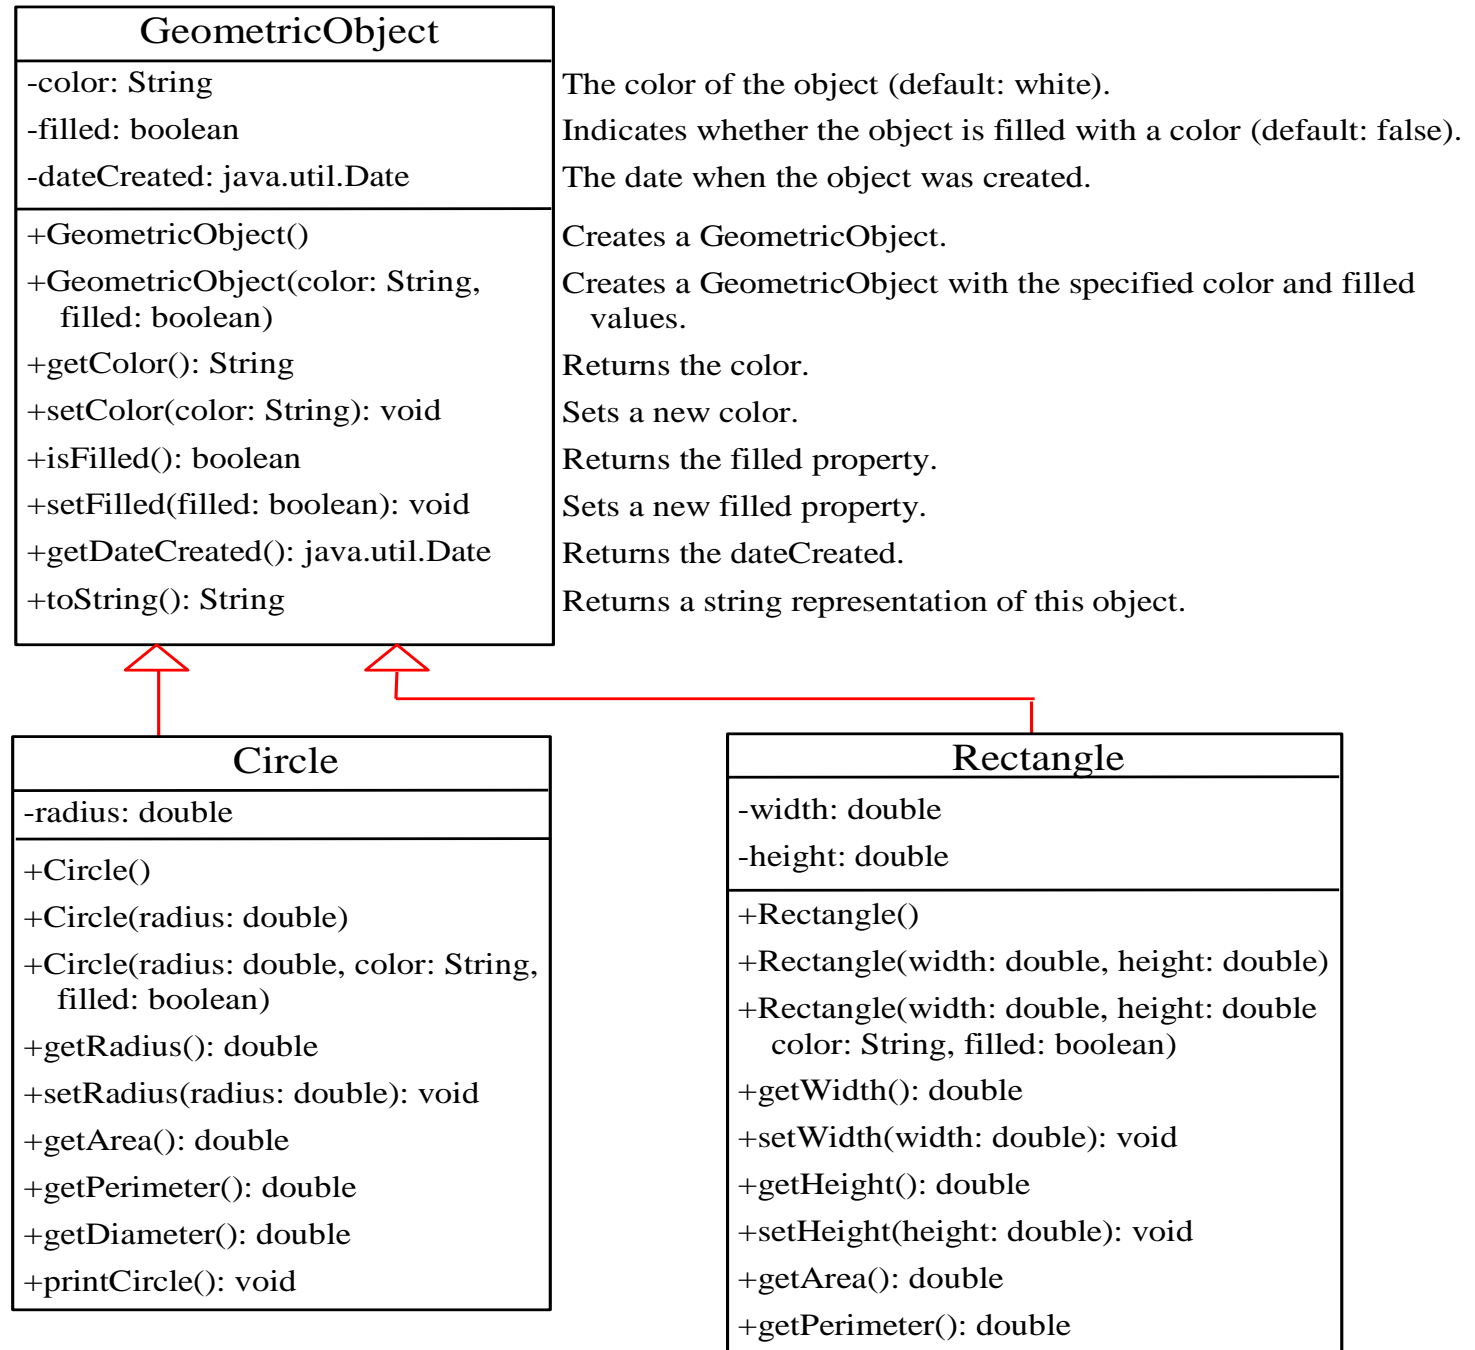


Are Superclass's Constructor Inherited?

- No. They are not inherited.
- They are invoked explicitly or implicitly.
- Explicitly using the super keyword.
- Unlike properties and methods, a superclass's constructors are not inherited in the subclass.
- Superclass constructor can only be invoked from the subclasses' constructors, using the keyword super.
- *If the keyword super is not explicitly used, the superclass's no-arg constructor is automatically invoked.*

Superclass's Constructor Is Always Invoked

A constructor may invoke an overloaded constructor or its superclass's constructor. If none of them is invoked explicitly, the compiler puts super() as the first statement in the constructor. For example,

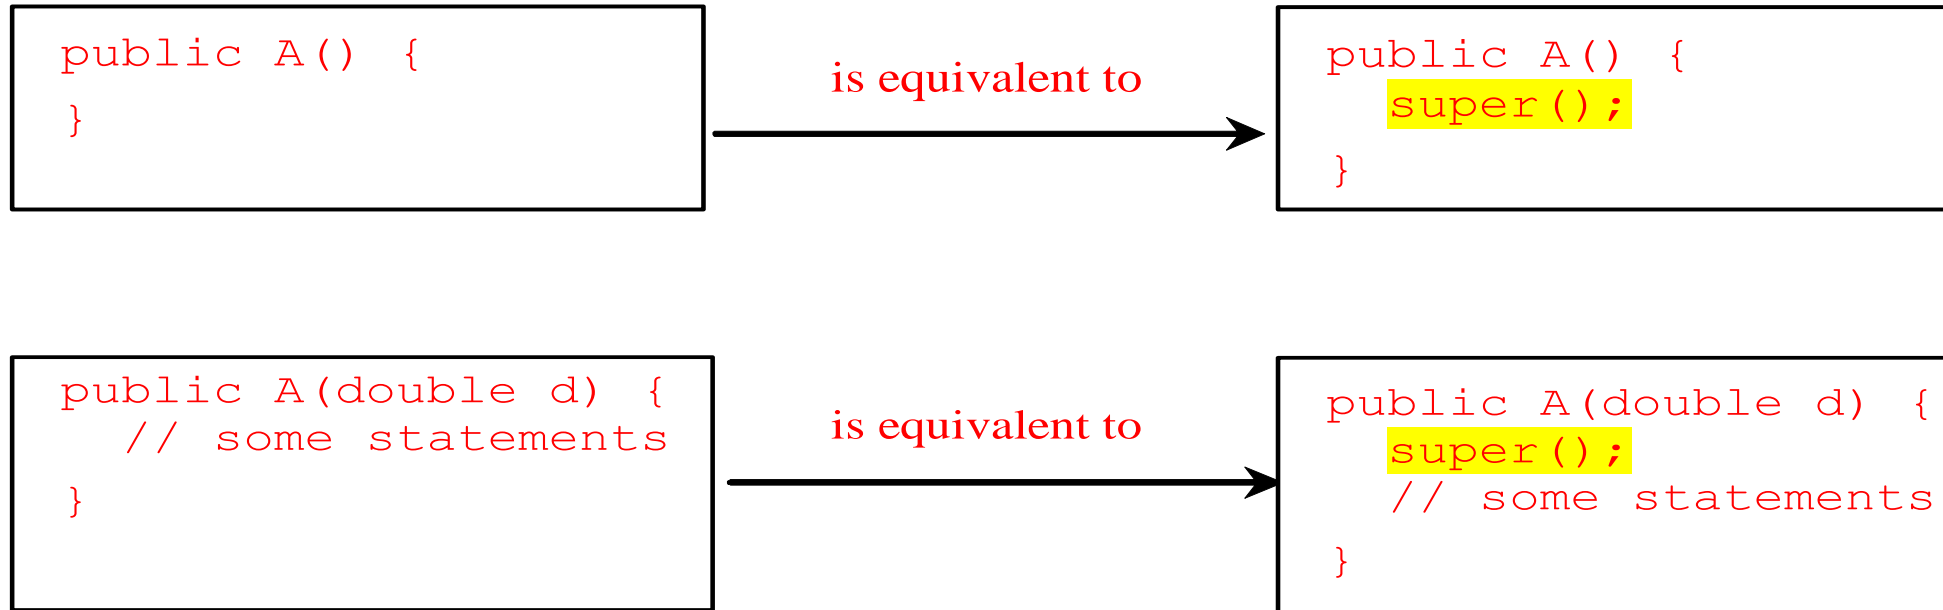

Using the Keyword `super`

The keyword `super` refers to the superclass of the class in which `super` appears. This keyword can be used in two ways:

- To call a superclass constructor
- To call a superclass method

Note:

- You must use keyword `super` to the superclass's constructor.
- Invoking the name of the superclass's constructor in a subclass causes an error.

`super` keyword must appear first in the constructor.

Constructor Chaining

Constructing an instance of a class invokes all the superclasses' constructors along the inheritance chain. This is called *constructor chaining*.

```
public class Faculty extends Employee {
    public static void main(String[] args) {
        new Faculty();
    }

    public Faculty() {
        System.out.println("(4) Faculty's no-arg constructor is invoked");
    }
}

class Employee extends Person {
    public Employee() {
        this("(2) Invoke Employee's overloaded constructor");
        System.out.println("(3) Employee's no-arg constructor is invoked");
    }

    public Employee(String s) {
        System.out.println(s);
    }
}

class Person {
    public Person() {
        System.out.println("(1) Person's no-arg constructor is invoked");
    }
}
```

Trace Execution

```
public class Faculty extends Employee {  
    public static void main(String[] args) {  
        new Faculty();  
    }  
  
    public Faculty() {  
        System.out.println("(4) Faculty's no-arg constructor is invoked");  
    }  
}  
  
class Employee extends Person {  
    public Employee() {  
        this("(2) Invoke Employee's overloaded constructor");  
        System.out.println("(3) Employee's no-arg constructor is invoked");  
    }  
  
    public Employee(String s) {  
        System.out.println(s);  
    }  
}  
  
class Person {  
    public Person() {  
        System.out.println("(1) Person's no-arg constructor is invoked");  
    }  
}
```

1. Start from the
main method

Trace Execution

```
public class Faculty extends Employee {  
    public static void main(String[] args) {  
        new Faculty();  
    }  
  
    public Faculty() {  
        System.out.println("(4) Faculty's no-arg constructor is invoked");  
    }  
}  
  
class Employee extends Person {  
    public Employee() {  
        this("(2) Invoke Employee's overloaded constructor");  
        System.out.println("(3) Employee's no-arg constructor is invoked");  
    }  
  
    public Employee(String s) {  
        System.out.println(s);  
    }  
}  
  
class Person {  
    public Person() {  
        System.out.println("(1) Person's no-arg constructor is invoked");  
    }  
}
```

2. Invoke Faculty
constructor

Trace Execution

```
public class Faculty extends Employee {  
    public static void main(String[] args) {  
        new Faculty();  
    }  
  
    public Faculty() {  
        System.out.println("(4) Faculty's no-arg constructor is invoked");  
    }  
}  
  
class Employee extends Person {  
    public Employee() {  
        this("(2) Invoke Employee's overloaded constructor");  
        System.out.println("(3) Employee's no-arg constructor is invoked");  
    }  
  
    public Employee(String s) {  
        System.out.println(s);  
    }  
}  
  
class Person {  
    public Person() {  
        System.out.println("(1) Person's no-arg constructor is invoked");  
    }  
}
```

3. Invoke Employee's
no-arg constructor

Trace Execution

```
public class Faculty extends Employee {
    public static void main(String[] args) {
        new Faculty();
    }

    public Faculty() {
        System.out.println("(4) Faculty's no-arg constructor is invoked");
    }
}

class Employee extends Person {
    public Employee() {
        this("(2) Invoke Employee's overloaded constructor");
        System.out.println("(3) Employee's no-arg constructor is invoked");
    }

    public Employee(String s) {
        System.out.println(s);
    }
}

class Person {
    public Person() {
        System.out.println("(1) Person's no-arg constructor is invoked");
    }
}
```

4. Invoke
Employee(String)

Trace Execution

```
public class Faculty extends Employee {
    public static void main(String[] args) {
        new Faculty();
    }

    public Faculty() {
        System.out.println("(4) Faculty's no-arg constructor is invoked");
    }
}

class Employee extends Person {
    public Employee() {
        this("(2) Invoke Employee's overloaded constructor");
        System.out.println("(3) Employee's no-arg constructor is invoked");
    }

    public Employee(String s) {
        System.out.println(s);
    }
}

class Person {
    public Person() {
        System.out.println("(1) Person's no-arg constructor is invoked");
    }
}
```

5. Invoke Person()
constructor

Trace Execution

```
public class Faculty extends Employee {
    public static void main(String[] args) {
        new Faculty();
    }

    public Faculty() {
        System.out.println("(4) Faculty's no-arg constructor is invoked");
    }
}

class Employee extends Person {
    public Employee() {
        this("(2) Invoke Employee's overloaded constructor");
        System.out.println("(3) Employee's no-arg constructor is invoked");
    }

    public Employee(String s) {
        System.out.println(s);
    }
}

class Person {
    public Person() {
        System.out.println("(1) Person's no-arg constructor is invoked");
    }
}
```

6. Execute println

Trace Execution

```
public class Faculty extends Employee {  
    public static void main(String[] args) {  
        new Faculty();  
    }  
  
    public Faculty() {  
        System.out.println("(4) Faculty's no-arg constructor is invoked");  
    }  
}  
  
class Employee extends Person {  
    public Employee() {  
        this("(2) Invoke Employee's overloaded constructor");  
        System.out.println("(3) Employee's no-arg constructor is invoked");  
    }  
  
    public Employee(String s) {  
        System.out.println(s);  
    }  
}  
  
class Person {  
    public Person() {  
        System.out.println("(1) Person's no-arg constructor is invoked");  
    }  
}
```

7. Execute println

Trace Execution

```
public class Faculty extends Employee {  
    public static void main(String[] args) {  
        new Faculty();  
    }  
  
    public Faculty() {  
        System.out.println("(4) Faculty's no-arg constructor is invoked");  
    }  
}  
  
class Employee extends Person {  
    public Employee() {  
        this("(2) Invoke Employee's overloaded constructor");  
        System.out.println("(3) Employee's no-arg constructor is invoked");  
    }  
  
    public Employee(String s) {  
        System.out.println(s);  
    }  
}  
  
class Person {  
    public Person() {  
        System.out.println("(1) Person's no-arg constructor is invoked");  
    }  
}
```



8. Execute println

Trace Execution

```
public class Faculty extends Employee {
    public static void main(String[] args) {
        new Faculty();
    }

    public Faculty() {
        System.out.println("(4) Faculty's no-arg constructor is invoked");
    }
}

class Employee extends Person {
    public Employee() {
        this("(2) Invoke Employee's overloaded constructor");
        System.out.println("(3) Employee's no-arg constructor is invoked");
    }

    public Employee(String s) {
        System.out.println(s);
    }
}

class Person {
    public Person() {
        System.out.println("(1) Person's no-arg constructor is invoked");
    }
}
```

9. Execute println

Example on the Impact of a Superclass without no-arg Constructor

Find out the errors in the program:

```
public class Apple extends Fruit {  
}  
  
class Fruit {  
    public Fruit(String name) {  
        System.out.println("Fruit's constructor is invoked");  
    }  
}
```

Declaring a Subclass

A subclass extends properties and methods from the superclass. You can also:

- Add new properties
- Add new methods
- Override the methods of the superclass

Overriding

- Definition:
Replacing the superclass's implementation with a new method in a subclass is called *overriding*.
 - The signature should be identical.
 - Only accessible non-static method can be overridden.
 - Access modifier could be different in overridden method as long as the subclass modifier is less restrictive than the superclass.

Can you Override Private methods from the super class?

No, a private method cannot be overridden, because it is not accessible outside its own class.

Can you Override Static methods from the super class?

- A static method can be inherited.
- However, a static method cannot be overridden.
- If you redefine the static method from the superclass into its subclass then the method of the superclass will be hidden.

Overriding vs. Overloading

```
public class Test {  
    public static void main(String[] args) {  
        A a = new A();  
        a.p(10);  
        a.p(10.0);  
    }  
}  
  
class B {  
    public void p(double i) {  
        System.out.println(i * 2);  
    }  
}  
  
class A extends B {  
    // This method overrides the method in B  
    public void p(double i) {  
        System.out.println(i);  
    }  
}
```

```
public class Test {  
    public static void main(String[] args) {  
        A a = new A();  
        a.p(10);  
        a.p(10.0);  
    }  
}  
  
class B {  
    public void p(double i) {  
        System.out.println(i * 2);  
    }  
}  
  
class A extends B {  
    // This method overloads the method in B  
    public void p(int i) {  
        System.out.println(i);  
    }  
}
```

Final Methods and Classes

- A method could be declared as *final*
 - A final method **cannot be overridden**.
- A class could be declared as *final*
 - A final class **cannot be subclassed**.

Example: Immutable class like *String* class

The Object Class and Its Methods

Every class in Java is descended from the java.lang.Object class.

If no inheritance is specified when a class is defined, the superclass of the class is Object.

```
public class Circle {  
    ...  
}
```

Equivalent

```
public class Circle extends Object {  
    ...  
}
```

The toString() method in Object

- The toString() method returns a string representation of the object.
- The default implementation returns a string consisting of a class name of which the object is an instance, the at sign (@), and a number representing this object.

```
Loan loan = new Loan();  
System.out.println(loan.toString());
```

The code displays something like **Loan@15037e5** . This message is not very helpful or informative.

Usually you should override the toString method so that it returns a digestible string representation of the object.


```
class Cards {  
  
    private String face;  
  
    private final String suit = "Diamond";  
  
public String toString() {  
return "Face " + face + " and Suit is " + suit;  
  
}  
  
}  
  
public class Test{  
  
    public static void main(String[] args) {  
  
        Cards c1 = new Cards();  
  
        System.out.print(c1); //is equal to c1.toString()  
  
    }  
  
}
```

Output:

Face null and Suit is Diamond