

quire


Classical books, reports and articles in EB Garamond.

Mario Vago Marzal · <https://github.com/mariovagogmarzal/quire> · MIT AND MIT-0

1	Introduction	1
2	Getting started	2
2.1	Fonts	2
2.2	Creating a document	2
3	Document structure	2
4	Output	3
5	Front matter	3
6	Customization	4
7	Elements	5
7.1	Localization	5
8	Reference	6
8.1	The template	6
8.2	Divisions	9
8.3	Theorems	10
8.4	Code, links and references	10
8.5	Style and localization	11

1 Introduction

quire typesets books, reports and articles in a classical style: EB Garamond text with small caps, quiet sans-serif labels, thin golden rules and generous margins. It adapts to print and to screens, to documents divided in parts, chapters or just sections, and to English, Spanish and Catalan. A *quire* is a gathering of folded sheets, the unit books are sewn from.

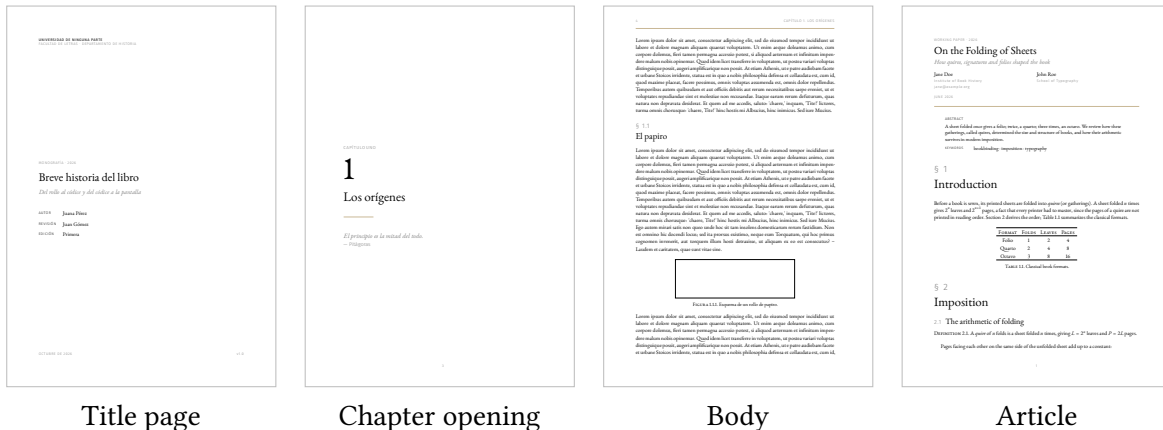

The pages above come from the examples in the repository, `examples/book.typ` and `examples/article.typ`, whose compiled versions are also available there.

2 Getting started

2.1 Fonts

The default style uses the following fonts, which are **not** bundled with the package and must be installed on your system (or uploaded to your project in the web app). Any of them can be replaced (Section 6).

Family	Usage
EB Garamond 12, EB Garamond 08	Body text and footnotes.
Fira Sans	Labels, running heads and numbers.
Garamond-Math	Mathematics.
JuliaMono	Raw text and code listings.

2.2 Creating a document

Start a new project from the template with

```
typst init @preview/quire
```

or import the package in an existing document and apply the template with a show rule:

```
#import "@preview/quire:0.1.0": *

#show: quire.with(
  title: [On Bookbinding],
  authors: "Jane Doe",
  lang: "en",
)

= Introduction
```

3 Document structure

The `top-level` option gives the role of level-1 headings, and with it the role of every heading level. Roles decide how headings look, where pages break, what the running heads show and how elements are numbered.

<code>top-level</code>	<code>=</code>	<code>==</code>	<code>===</code>
"part"	Part	Chapter	Section
"chapter"	Chapter	Section	Subsection
"section"	Section	Subsection	—

- **Parts** open on a page of their own and are numbered with Roman numerals. Chapters are numbered continuously across parts.
- **Chapters** open on a new page, with a label that spells the number out (“Chapter one”) above a large numeral. The `chapter` function gives them an opening page of their own, with an optional epigraph.
- **Sections** show the section sign and number above the title; **subsections** and deeper headings show the number inline.

Figures, tables, listings, labeled equations and theorem-like environments are numbered within sections, e.g. Figure 2.3.1 is the first figure in section 3 of chapter 2. Only labeled equations are numbered, since only those can be referenced.

With `top-level: "section"` the document is an article: it gets a title block instead of a title page, its abstracts are shown below it, and the table of contents is hidden unless requested.

4 Output

The `output` option adapts the document to its medium.

"digital" Symmetric margins, no blank pages, and colored external links.

"print" A wider inner margin for binding; parts, chapters and the main matter start on a recto (an odd page), with blank pages inserted as needed and left without running head or folio; external links are not colored, and links made with `href` get a footnote with their address.

5 Front matter

Books and reports (with `title-page: true`, the default unless `top-level` is "section") start with these pages, numbered with Roman numerals. Each one is omitted when its content is none.

1. The **title page**: the institution (and logo), the kicker, title and subtitle, a grid with the authors and the info rows, and the date and version at the bottom.
2. The **dedication page**: the dedication, with the colophon at the bottom. By default, the colophon gathers the title, a copyright line, the license, the fonts and Typst version used, the version and the date.
3. The **acknowledgments**.
4. The **abstracts**, one page each. Pass an array of dictionaries to write abstracts in several languages, each with its own keywords.
5. The **table of contents**.

```
#show: quire.with(
  title: [Higher Categories],
  authors: (name: "Jane Doe", affiliation: [University of Somewhere]),
  kicker: [Master's thesis · 2026],
  institution: ([University of Somewhere], [Faculty of Mathematics]),
  info: (([Supervisor], [John Smith]), ([Defense], [June 2026])),
  abstract: (
    (lang: "en", body: [...], keywords: ("categories",)),
    (lang: "es", body: [...], keywords: ("categorías",)),
  ),
)
```

Dates given as datetime are shown as “month year”, with month names always in English: Typst does not localize dates yet ([typst/typst#2840](#)). Until it does, pass the date as content, e.g. date: [junio de 2026].

6 Customization

The fonts and colors options override the defaults key by key; everything else is derived from them.

```
#show: quire.with(
  fonts: (
    serif: "Libertinus Serif",
    sans: (font: "Inter", scale: 0.85),
    math: "Libertinus Math",
  ),
  colors: (link: rgb("#7a1f3d"), rule: rgb("#9aa5b1")),
  strong: "bold",
)
```

A font is a family name, a fallback list, or a dictionary of text arguments with an optional scale: a factor applied to sizes so that a sans-serif or monospace family looks matched with the serif text. When only serif is overridden, serif-small follows it. Since EB Garamond has no bold weight, strong emphasis is rendered in small caps; with a family that has one, set strong: "bold".

All sizes are relative to font-size (12pt by default), and the page is set by paper. Further adjustments, such as the citation style, can be made with set and show rules after the template:

```
#show: quire.with(...)
#set bibliography(style: "chicago-author-date")
```

The defaults are:

Font	Family	Color	Value
serif	EB Garamond 12	text	 #000000
serif-small	EB Garamond 08	muted	 #808080
sans	Fira Sans	link	 #1f4d7a
math	Garamond-Math	rule	 #c9b896
mono	JuliaMono	highlight	 #fff2a8

7 Elements

Theorems Theorem-like environments are built on `theorion`: `theorem`, `lemma`, `proposition`, `corollary` and `conjecture` have an italic body; `definition`, `assumption`, `axiom` and `example` an upright one; `remark`, `note` and `warning` an italic title. They all share one counter. `proof` ends with a QED symbol and can name what it proves with `of`.

Code Code blocks are styled with `codly` `code-file` adds a header with a file name.

Links `href` makes an external link that survives printing; `ref-titled` references a heading followed by its title, e.g. “Chapter 2 (Preliminaries)”.

Appendices `#show: appendix` letters the following chapters (or sections) and names them “Appendix”.

7.1 Localization

Names of divisions, the bibliography, the abstract and the like follow the text language at the place where they are shown, as Typst’s own names do: English (“en”), Spanish (“es”) and Catalan (“ca”), with English as fallback. Set the document language with the `lang` option; a block with `#set text(lang: ...)` switches theorem names, references and the like inside it.

8 Reference

8.1 The template

```
quire(  
  title: content,  
  subtitle: none content,  
  authors: str content dictionary array,  
  date: auto none datetime content,  
  version: none str content,  
  description: none str,  
  keywords: array,  
  lang: auto str,  
  region: auto none str,  
  top-level: str,  
  output: str,  
  paper: str,  
  font-size: length,  
  title-page: auto bool,  
  kicker: none content,  
  institution: none content array,  
  logo: none content,  
  info: array,  
  dedication: none content,  
  license: none content,  
  colophon: auto none content,  
  acknowledgments: none content,  
  abstract: none content dictionary array,  
  outline: auto bool int,  
  fonts: dictionary,  
  colors: dictionary,  
  strong: str,  
  body: content  
) → content
```

The template function, applied with a show rule at the beginning of the document.

The structure of the document is set by `top-level`, which gives the role of level-1 headings: with "part", = is a part, == a chapter and === a section; with "chapter", = is a chapter; with "section", = is a section. Books and reports get a title page and preliminary pages (dedication, colophon, acknowledgments, abstracts, contents) numbered in Roman numerals; articles get a title block at the top of the first page, followed by the abstracts.

```
#import "@preview/quire:0.1.0": *  
  
#show: quire.with(  
  title: [On Bookbinding],  
  authors: "Jane Doe",  
  lang: "en",  
  top-level: "chapter",  
  output: "print",  
)
```

`title` `content` = `none`

The title of the document.

`subtitle` `none` `content` = `none`

The subtitle of the document.

`authors` `str` `content` `dictionary` `array` = `()`

The authors: a name, a dictionary with a name and optionally an affiliation and an email, or an array of those.

`date` `auto` `none` `datetime` `content` = `auto`

The date of the document. With `auto`, the current date. Dates are shown as “month year”; month names are always in English until Typst localizes them, so pass `content` to localize the date.

`version` `none` `str` `content` = `none`

The version of the document.

`description` `none` `str` = `none`

A short description of the document, for the PDF metadata.

`keywords` `array` = `()`

Keywords, for the PDF metadata and the abstracts.

`lang` `auto` `str` = `auto`

The language of the document, as an ISO 639-1 code. The template is localized in English (`"en"`), Spanish (`"es"`) and Catalan (`"ca"`). With `auto`, the language set before the template applies.

`region` `auto` `none` `str` = `auto`

The region of the document, as an ISO 3166-1 alpha-2 code.

`top-level` `str` = `"chapter"`

The role of level-1 headings: `"part"`, `"chapter"` or `"section"`.

`output` `str` = `"digital"`

The output medium. `"print"` uses a wider inner margin, starts parts and chapters on a recto page (inserting blank pages as needed) and adds footnotes to links made with `href`. `"digital"` uses symmetric margins, never inserts blank pages and colors external links.

`paper` `str` = `"a4"`

The paper size.

`font-size` `length` = `12pt`

The size of the body text. All other sizes are relative to it.

`title-page` `auto` `bool` = `auto`

Whether to render a full title page with preliminary pages. With `auto`, this is the case unless `top-level` is `"section"`; otherwise, a title block opens the first page.

`kicker` `none` `content` = `none`

A short line above the title, e.g. the kind of document: `[Master's thesis • 2026]`.

`institution` `none` `content` `array` = `none`

The institution, shown at the top of the title. An array gives several lines (e.g. university, faculty, department), the first one emphasized.

`logo` `none` `content` = `none`

A logo shown next to the institution on the title page, e.g. `image("logo.svg")`.

`info` `array` = `()`

Further information shown with the authors on the title page, as (label, value) pairs, e.g. `(([Supervisor], [John Smith]), ([Defense], [June 2026]))`.

`dedication` `none` `content` = `none`

A dedication, centered on its own page. Requires a title page.

`license` `none` `content` = `none`

The license or copyright notice, shown in the default colophon.

`colophon` `auto` `none` `content` = `auto`

The colophon, at the bottom of the dedication page: with `auto`, the title, copyright, license, typesetting details, version and date. Requires a title page.

`acknowledgments` `none` `content` = `none`

The acknowledgments, as an unnumbered division before the abstract. Requires a title page.

`abstract` `none` `content` `dictionary` `array` = `none`

The abstract: its body, a dictionary with a `body` and optionally a `lang` and `keywords`, or an array of such dictionaries for abstracts in several languages. Abstracts without their own keywords use `keywords`.

`outline` `auto` `bool` `int` = `auto`

The table of contents: a boolean, or its depth. With `auto`, it is shown with a title page and hidden otherwise.

`fonts` `dictionary` = `(:)`

Font overrides, merged with the defaults. Keys are `serif`, `serif-small`, `sans`, `math` and `mono`; values are a family name, a fallback list of family names, or a dictionary of text arguments with an optional `scale` (an optical size factor). For instance, `(serif: "Libertinus Serif", sans: (font: "Inter", scale: 0.85))`.

`colors` `dictionary` = `(:)`

Color overrides, merged with the defaults. Keys are `text`, `muted`, `link`, `rule` and `highlight`.

`strong` `str` = `"smallcaps"`

How strong emphasis is rendered: `"smallcaps"` (the default, since EB Garamond has no bold weight) or `"bold"`.

`body` `content`

The document.

8.2 Divisions

```
part(  
  title: content,  
  label: none label,  
  numbered: bool,  
  epigraph: none content,  
  attribution: none content  
) → content
```

Inserts a part heading on a page of its own, with an optional epigraph. A plain level-1 heading (= title) is equivalent when no epigraph is needed. Only available with `top-level: "part"`.

```
#part(  
  [Foundations],  
  epigraph: [Begin at the beginning, and go on till you come to the end: then stop.],  
  attribution: [Lewis Carroll],  
)
```

`title` `content`

The title of the part.

`label` `none` `label` = `none`

Label attached to the heading, to reference it.

`numbered` `bool` = `true`

Whether the part is numbered.

`epigraph` `none` `content` = `none`

An optional epigraph shown below the title.

`attribution` `none` `content` = `none`

The attribution of the epigraph.

```
chapter(  
  title: content,  
  label: none label,  
  numbered: bool,  
  opening: bool,  
  epigraph: none content,  
  attribution: none content  
) → content
```

Inserts a chapter heading. By default the chapter opens on a page of its own, with the title vertically centered and an optional epigraph; with `opening: false` it behaves like a plain chapter heading followed by the epigraph. Not available with `top-level: "section"`.

```
#chapter(  
  [Introduction],  
  label: <intro>,  
  epigraph: [The beginning is the most important part of the work.],  
  attribution: [Plato],  
)
```

`title` `content`

The title of the chapter.

`label` `none` `label` = `none`

Label attached to the heading, to reference it.

`numbered` `bool` = `true`

Whether the chapter is numbered.

`opening` `bool` = `true`

Whether the chapter opens on a page of its own.

`epigraph` `none` `content` = `none`

An optional epigraph shown below the title.

`attribution` `none` `content` = `none`

The attribution of the epigraph.

```
appendix(body: content) → content
```

Starts the appendices: chapters (or sections, without chapters) are numbered with letters from here on and named “Appendix”. Apply it with a show rule where the appendices begin.

```
#show: appendix  
= Supplementary proofs
```

`body` `content`

The appendices.

8.3 Theorems

```
proof(of: none content, body: content) → content
```

Proof environment, ended by a QED symbol.

```
#proof(of: [ @thm:primes ])[Suppose there are finitely many primes...]
```

`of` `none` `content` = `none`

What is being proved, appended to the title in parentheses (typically a reference).

`body` `content`

The proof.

8.4 Code, links and references

```
code-file(filename: str content, ..args: arguments, body: content) → content
```

Shows a code listing with a header naming its file. Further named arguments are passed to codly’s local, e.g. highlights or offset.

```
#code-file(filename: "hello.py")[
    ```python
 print("Hello, world!")
    ```
]
```

`filename` `str` `content` = `none`

The name shown in the header.

`..args` `arguments`

Further arguments for `codly`'s `local`.

`body` `content`

The code block.

```
href(dest: str, ..body: content) → content
```

An external link that survives printing. In digital output it is a plain link; in print output, the link text is followed by a footnote with the address. Without a body, the address itself is shown and no footnote is added.

```
Built with #href("https://typst.app")[Typst].
```

`dest` `str`

The destination address.

`..body` `content`

The link text, optional.

```
ref-titled(target: label) → content
```

A reference followed by the title of the referenced heading in small caps, e.g. “Chapter 2 (Preliminaries)”.

`target` `label`

The label of a heading.

8.5 Style and localization

```
default-fonts
```

Default font families. Each entry is a dictionary of arguments for `Typst`'s `text` function, plus an optional `scale` key: a factor applied to font sizes so that the family looks optically matched with the serif text.

These fonts are not bundled with the package and must be installed to use the default style.

```
default-colors
```

Default color palette.

```
translate(key: str, lang: auto | str) → str content
```

Returns the localized string for key, in the given language or else in the current text language.

key `str`

The key of the string (e.g. "chapter").

lang `auto` | `str` = `auto`

The language. With `auto`, the current text language, which requires context: the result is then content that adapts to where it is placed.