tiaoma

A barcode generator for typst that provides type safe API bindings for Zint (GitHub) library through a WASM plugin.

See official Zint manual for a more in-depth description of individual options and barcodes.

API

Some generators require additional configuration (such as composite codes), this can be achieved by passing options to Zint.


barcode

Draw a barcode of any supported `symbology`.

The barcode is drawn with Typst's own shapes, so `fill` and `background` reach the document as they are given: a `cmyk` colour stays CMYK in the PDF.

Example:

```
#tiaoma.barcode("12345678", "QRCode", fill:
gradient.linear(blue, red), background:
green.lighten(70%), options: (
  scale: 2.0,
  output-options: (
    barcode-dotty-mode: true
  ),
  dot-size: 1.2,
))
```



- data (str, bytes, array): Data to encode. Bytes are passed to Zint as they are, so a payload that is not text needs `input-mode` set to `data`.
- symbology (str): Symbology type name; must be one of supported types.

  Example values: `"Code11"`, `"C25Standard"`, ...
- options (dictionary): Additional options to pass to Zint.

  See the configuration section for details on available options and how to use them.
- fill (auto, color, gradient, tiling, str): What the bars, modules and human readable text are drawn with. `auto` is the `fg-color` option if it is given, and black otherwise.
- background (auto, none, color, gradient, tiling, str): What the area behind the symbol, quiet zones included, is filled with. `auto` is the `bg-color` option if it is given, and nothing otherwise.
- hrt (dictionary): Arguments for the `text` function that sets the human readable text, such as `font` or `size`. A `size` given here is used as it is, however large the barcode is drawn; by default the text is set in DejaVu Sans Mono at the size Zint lays it out for.
- width (auto, relative): The width of the barcode, as for `image`.
- height (auto, relative): The height of the barcode, as for `image`.
- fit (str): How the barcode fills a `width` and `height` of a different shape, as for `image`: `"cover"`, `"contain"` or `"stretch"`.

Parameters

```
barcode(
  data,
  symbology,
  options,
  fill,
  background,
  hrt,
  width,
  height,
  fit
) -> content
```

dm-size

Returns the `int` `option-2` value that fixes a Data Matrix to the given *height* and *width*.

A fixed size is an `option-2` value, as it selects one entry of Zint's size table. Option 3 is a different setting: its `DM_SQUARE` and `DM_DMRE` values only constrain the size Zint picks on its own.

- height (int): Data Matrix height
- width (int): Data Matrix width

Parameters

```
dm-size(
  height,
  width
) -> int
```

Shortcut functions

Most barcodes are supported through shortcut functions. They accept the same arguments as `barcode` function but don't require `symbology` to be specified.

Zint configuration

All exported functions support optionally providing the `options` dictionary which is passed to Zint. This provides means to fully configure generated images.

The following values are valid for the `options` dictionary. A key that is not one of them is an error, so a misspelled option is reported instead of being ignored:

Field	Type	Description	Default
height	`float`	Barcode height in X-dimensions (ignored for fixed-width barcodes)	`none`
scale	`float`	Scale factor when printing barcode, i.e. adjusts X-dimension	`1.0`
whitespace-width	`int`	Width in X-dimensions of whitespace to left & right of barcode	`0`
whitespace-height	`int`	Height in X-dimensions of whitespace above & below the barcode	`0`
border-width	`int`	Size of border in X-dimensions	`0`
output-options	`int` or `array` or `dictionary`	Various output parameters (bind, box etc, see below)	`0`
fg-color	`color` or `str`	Another name for the `fill` argument of `barcode`, which is the better place for it	`black`
bg-color	`color` or `str`	Another name for the `background` argument of `barcode`, which is the better place for it	`none`
primary	`str`	Primary message data (MaxiCode, Composite)	`""`
option-1	`int`	Symbol-specific options (see manual)	`-1`
option-2	`int`	Symbol-specific options (see manual)	`0`
option-3	`int` or `str`	Symbol-specific options (see manual)	`0`
show-hrt	`bool`	Whether to show Human Readable Text (HRT)	`true`
input-mode	`int` or `string` or `array` or `dictionary`	Encoding of input data	`0`
eci	`int`	Extended Channel Interpretation.	`0`
dot-size	`float`	Size of dots used in BARCODE_DOTTY_MODE.	`4.0 / 5.0`
text-gap	`float`	Gap between barcode and text (HRT) in X-dimensions.	`1.0`
guard-descent	`float`	Height in X-dimensions that EAN/UPC guard bars descend.	`5.0`
warn-level	`str`	What to do about a symbol `Zint` will draw but has warned about, such as a bar height below the minimum its standard sets, a truncated human readable text, or an ECI it inserted on its own. Such a symbol renders exactly like a compliant one, so a	`"default"`

Field	Type	Description	Default
		document that cannot ship it has to ask to be stopped: `"default"` draws it anyway, `"fail-all"` fails the compilation and says what was not complied with.	

Input Mode

Input mode options allow specifying how `Zint` should handle input data. `Zint` uses `int` bitflags for these, but `tiaoma` allows you to specify them using several other formats as documented below.

The following options are supported:

Input format (mutually exclusive)			
Constant	`int`	`str`	**Description**
`DATA_MODE`	`0`	`"data"`	Use full 8-bit range interpreted as binary data.
`UNICODE_MODE`	`1`	`"unicode"`	Use UTF-8 input.
`GS1_MODE`	`2`	`"gs1"`	Encode GS1 data using FNC1 characters.

Behavior customization			
Constant	`int`	`str`	**Description**
`ESCAPE_MODE`	`8`	`"escape"`	Process input data for escape sequences.
`GS1PARENS_MODE`	`16`	`"gs1-parentheses"`	Parentheses (round brackets) used in GS1 data instead of square brackets to delimit Application Identifiers (parentheses must not otherwise occur in the data).
`GS1NOCHECK_MODE`	`32`	`"gs1-no-check"`	Do not check GS1 data for validity, i.e. suppress checks for valid AIs and data lengths. Invalid characters (e.g. control characters, extended ASCII characters) are still checked for.
`HEIGHTPERROW_MODE`	`64`	`"height-per-row"`	Interpret the `height` variable as per-row rather than as overall height.
`FAST_MODE`	`128`	`"fast"`	Use faster if less optimal encodation for symbologies that support it (currently Data Matrix only).
`EXTRA_ESCAPE_MODE`	`256`	`"extra-escape"`	Undocumented.

String Value

`input_mode` of `str` type is assumed to be a *input format* value from the first table.

Array Value

`input_mode` of `array` type is assumed to be a list of `str` values from the above tables; individual constants will be converted to `int`s and unioned together.

Dictionary Value

`input_mode` of `dictionary` type is assumed to be `str`-`bool` pairs where keys are constants from the above table.

Additionally, *input format* can be specified as a `str` value paired to `"format"` key.

In other words, columns of the following table are equivalent:

`dictionary`	`array`	`str`	`int`
(`"format"`: `"data"`)	(`"data"`)	`"data"`	`0`
(`"unicode"`: `true`)	(`"unicode"`)	`"unicode"`	`1`
(`"gs1"`: `true`, `"gs1-no-check"`: `true`)	(`"gs1"`, `"gs1-no-check"`)	N/A	`34`

Output Options

Output options allow specifying how `Zint` should generate the barcode/symbol.

Constant	`int`	`str`	Description
`BARCODE_BIND_TOP`	`1`	`"barcode-bind-top"`	Boundary bar *above* the symbol and between rows if stacking multiple symbols.
`BARCODE_BIND`	`2`	`"barcode-bind"`	Boundary bars *above* and *below* the symbol and between rows if stacking multiple symbols.

Constant	int	str	Description
BARCODE_BOX	4	"barcode-box"	Add a box surrounding the symbol and whitespace.
SMALL_TEXT	32	"small-text"	Use a smaller font for the Human Readable Text.
BOLD_TEXT	64	"bold-text"	Embolden the Human Readable Text.
CMYK_COLOUR	128	"cmyk-color"	Select the CMYK colour space option for Encapsulated PostScript and TIF files.
BARCODE_DOTTY_MODE	256	"barcode-dotty-mode"	Plot a matrix symbol using dots rather than squares.
GS1_GS_SEPARATOR	512	"gs1-gs-separator"	Use GS instead of FNC1 as GS1 separator (Data Matrix only).
BARCODE_QUIET_ZONES	2048	"barcode-quiet-zones"	Add compliant quiet zones (additional to any specified whitespace).
BARCODE_NO_QUIET_ZONES	4096	"barcode-no-quiet-zones"	Disable quiet zones, notably those with defaults.
COMPLIANT_HEIGHT	8192	"compliant-height"	Warn if height not compliant and use standard height (if any) as default.
EANUPC_GUARD_WHITESPACE	16384	"ean-upc-guard-whitespace"	Add quiet zone indicators ("<" / ">") to HRT whitespace (EAN/UPC)
EMBED_VECTOR_FONT	32768	"embed-vector-font"	Embed font in vector output.

Array Value

`output_options` of `array` type assumed to be `str` values from the above table.

Dictionary Value

`output_options` of `dictionary` type assumed to be `str`-`bool` pairs where keys are constants from the above table.

Option 3

As there's constants associated with `option_3` values, this package allows specifying the value as either an `int` or a `str`.

A fixed Data Matrix size is not one of them: `dm-size(height, width)` returns an `option-2` value, and giving it to `option-3` is an error.

The following table documents supported values and their `str` representations:

Constant	int	str	Description
DM_SQUARE	100	"square"	Only consider square versions on automatic symbol size selection
DM_DMRE	101	"rect"	Consider DMRE versions on automatic symbol size selection
DM_ISO_144	128	"iso-144"	Use ISO instead of "de facto" format for 144x144 (i.e. don't skew ECC)
ZINT_FULL_MULTIBYTE	200	"full-multibyte"	Enable Kanji/Hanzi compression for Latin-1 & binary data
ULTRA_COMPRESSION	128	"compression"	Enable Ultracode compression **(experimental)**

`Zint` reads the Data Matrix shape and the 144x144 ECC placement out of different parts of the same number, so the two can be asked for together by adding them: `228` is `DM_SQUARE` with `DM_ISO_144`, and `229` is `DM_DMRE` with it. There is no `str` spelling for a combination.

Examples

EAN (European Article Number)

EAN-13

Example:

```
#ean13("451234567890")
```

Result:



EAN-8

Example:

```
#ean8("7432365")
```

Result:



EAN-5 add-on

Example:

```
#ean-5addon("54321")
```

Result:



EAN-2 add-on

Example:

```
#ean-2addon("12")
```

Result:



EAN-14

Example:

```
#ean14("1234567890")
```

Result:



EANX

Takes any of the four EAN lengths. Superseded by the shortcuts above, which each take one.

Example:

```
#eanx("1234567890")
```

Result:



EAN-13 Composite Code

Example:

```
#ean13-cc("331234567890",
  "[99]1234-abcd")
```

Result:



EAN-8 Composite Code

Example:

```
#ean8-cc("7432365",
  "[21]A12345678")
```

Result:



PDF417

Micro PDF417

Example:

```
#micro-pdf417("1234567890")
```

Result:



PDF417

Example:

```
#pdf417("1234567890")
```

Result:



Compact PDF417

Example:

```
#pdf417-comp("1234567890")
```

Result:



GS1

GS1-128

Example:

```
#gs1-128("[01]98898765432106")
```

Result:



GS1 DataBar Omnidirectional

Example:

```
#dbar-omn("98898765432106")
```

Result:



GS1 DataBar Limited

Example:

```
#dbar-ltd("988987654321")
```

Result:



GS1 DataBar Expanded

Example:

```
#dbar-exp("[01]98898765432106")
```

Result:



GS1 DataBar Stacked

Example:

```
#dbar-stk("1234567890")
```

Result:



GS1 DataBar Stacked Omnidirectional

Example:

```
#dbar-omn-stk("1234567890")
```

Result:




GS1 DataBar Expanded Stacked

Example:

```
#dbar-exp-stk("[01]98898765432106[3202]012345[15]991231")
```

Result:



GS1-128 Composite Code

Example:

```
#gs1-128-cc("[01]03212345678906",
  "[21]A1B2C3D4E5F6G7H8")
```

Result:



GS1 DataBar Omnidirectional Composite Code

Example:

```
#dbar-omn-cc("0361234567890",
  "[11]990102")
```

Result:



GS1 DataBar Limited Composite Code

Example:

```
#dbar-ltd-cc("1311234567890",
  "[17]010615[10]A123456")
```

Result:



GS1 DataBar Expanded Composite Code Example:

```
#dbar-exp-cc("[01]93712345678904[3103]001234",
  "[91]1A2B3C4D5E")
```

Result:



GS1 DataBar Stacked Composite Code Example:

```
#dbar-stk-cc("0341234567890",
  "[17]010200")
```

Result:



GS1 DataBar Omnidirectional Stacked Composite Code Example:

```
#dbar-omn-stk-cc("0401234567890",
  "[17]050101[10]ABC123")
```


Result:



GS1 DataBar Expanded Stacked Composite Code Example:

```
#dbar-exp-stk-cc("[01]00012345678905[10]ABCDEF",
  "[21]12345678")
```

Result:



See the configuration section for the options a composite takes, `option-1` among them, which picks the composite mode instead of leaving it to Zint.

C25

Standard
Example:

```
#c25-standard("123")
```

Result:



Interleaved
Example:

```
#c25-inter("1234567890")
```

Result:



IATA
Example:

```
#c25-iata("1234567890")
```

Result:



Data Logic
Example:

```
#c25-logic("1234567890")
```

Result:



Industrial
Example:

```
#c25-ind("1234567890")
```

Result:



UPC (Universal Product Code)

UPC-A
Example:

```
#upca("01234500006")
```

Result:



UPC-A w/ Check Digit
Example:

```
#upca-chk("012345000065")
```

Result:



UPC-E
Example:

```
#upce("123456")
```

Result:



UPC-E w/ Check Digit
Example:

```
#upce-chk("12345670")
```

Result:



UPC-A Composite Code
Example:

```
#upca-cc("61414101234",
  "[21]A12345678")
```

Result:



UPC-E Composite Code
Example:

```
#upce-cc("0121230",
  "[15]021231")
```

Result:



HIBC (Health Industry Barcodes)

Code 128
Example:

```
#hibc-128("1234567890")
```

Result:



Code 39
Example:

```
#hibc-39("1234567890")
```

Result:



Data Matrix
Example:

```
#hibc-dm("1234567890")
```

Result:



QR
Example:

```
#hibc-qr("1234567890")
```

Result:



PDF417
Example:

```
#hibc-pdf("1234567890")
```

Result:



Micro PDF417
Example:

```
#hibc-mic-pdf("1234567890")
```


Result:



Codablock-F
Example:

```
#hibc-codablock-f("1234567890")
```

Result:

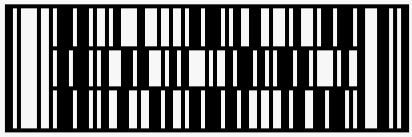

Aztec
Example:

```
#hibc-aztec("1234567890")
```

Result:



Postal

Australia Post Redirection

Example:

```
#aus-redirect("12345678")
```

Result:



Australia Post Reply Paid

Example:

```
#aus-reply("12345678")
```

Result:



Australia Post Routing

Example:

```
#aus-route("12345678")
```

Result:



Australia Post Standard Customer

Example:

```
#aus-post("12345678")
```

Result:



Brazilian CEPNet Postal Code

Example:

```
#cepnet("1234567890")
```

Result:



DAFT Code

Example:

```
#daft("DAFTFDATATFDTFAD")
```

Result:



Deutsche Post Identcode

Example:

```
#dp-ident("1234567890")
```

Result:



Deutsche Post Leitcode

Example:

```
#dp-leitcode("1234567890")
```

Result:



Deutsher Paket Dienst

Example:

```
#dpd("01234567890123456789012345678")
```

Result:



Dutch Post KIX Code

Example:

```
#kix("1234567890")
```

Result:



Japanese Postal Code
Example:

```
#japan-post("1234567890")
```

Result:



Korea Post
Example:

```
#korea-post("123456")
```

Result:



POSTNET
Example:

```
#postnet("1234567890")
```

Result:



Royal Mail 2D Mailmark (CMDM)
Example:

```
#mailmark-2d(
  32, 32,
  "JGB 011123456712345678CW14NJ1T 0EC2M2QS
REFERENCE1234567890QWERTYUIOPASDFGHJKLZXCVBNM"
)
```

Result:



Royal Mail 4-State Customer Code
Example:

```
#rm4scc("1234567890")
```

Result:



Royal Mail 4-State Mailmark
Example:

```
#mailmark-4s("21B2254800659JW5O9QA6Y")
```

Result:



Universal Postal Union S10
Example:

```
#upus10("RR072705659PL")
```

Result:



UPNQR (Univerzalnega Plačilnega Naloga QR)
Example:

```
#upnqr("1234567890")
```

Result:



USPS Intelligent Mail
Example:

```
#usps-imail("01300123456123456789")
```

Result:



Other Generic Codes

Aztec Code
Example:

```
#aztec("1234567890")
```

Result:



Aztec Rune
Example:

```
#azrune("122")
```

Result:



Channel Code
Example:

```
#channel("123456")
```

Result:



Codabar
Example:

```
#codabar("A123456789B")
```


Result:



Codablock-F
Example:

```
#codablock-f("1234567890")
```

Result:



Code 11
Example:

```
#code11("0123452")
```


Result:



Code 16k
Example:

```
#code16k("1234567890")
```

Result:



Code 32
Example:

```
#code32("12345678")
```

Result:



Code 39
Example:

```
#code39("1234567890")
```


Result:



Code 49
Example:

```
#code49("1234567890")
```

Result:



Code 128

Example:

```
#code128("1234567890")
```

Result:



Code 128 (AB)

Example:

```
#code128ab("1234567890")
```

Result:



Code One

Example:

```
#code-one("1234567890")
```

Result:



Data Matrix (ECC200)

Example:

```
#data-matrix("1234567890")
```

Result:



DotCode

Example:

```
#dotcode("1234567890")
```

Result:



DX Film Edge

The DX number and frame number printed along the edge of 35mm film.

Example:

```
#dx-film-edge("112-1/10A")
```

Result:



Extended Code 39

Example:

```
#ex-code39("1234567890")
```

Result:



Grid Matrix

Example:

```
#grid-matrix("1234567890")
```

Result:



Han Xin (Chinese Sensible)

Example:

```
#hanxin("abc123全ñ全濯")
```

Result:



IBM BC412 (SEMI T1-95)

Example:

```
#bc412("1234567890")
```

Result:



ISBN

Example:

```
#isbnx("9789861817286")
```

Result:



ITF-14

Example:

```
#itf14("1234567890")
```

Result:



LOGMARS

Example:

```
#logmars("1234567890")
```

Result:




MaxiCode

Example:

```
#maxicode("1234567890")
```

Result:



Micro QR

Example:

```
#micro-qr("1234567890")
```

Result:



MSI Plessey

Example:

```
#msi-plessey("1234567890")
```

Result:




NVE-18 (SSCC-18)

Example:

```
#nve18("1234567890")
```

Result:

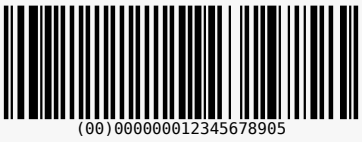


Pharmacode One-Track

Example:

```
#pharma("123456")
```

Result:



Pharmacode Two-Track

Example:

```
#pharma-two("12345678")
```

Result:



Pharmazentralnummer

Example:

```
#pzn("12345678")
```

Result:



Planet

Example:

```
#planet("1234567890")
```

Result:



Plessey

Example:

```
#plessey("1234567890")
```

Result:



QR Code

Example:

```
#qrcode("1234567890")
```

Result:



Rectangular Micro QR Code (rMQR)

Example:

```
#rmqr("1234567890")
```

Result:



Telepen Numeric

Example:

```
#telepen-num("1234567890")
```

Result:



Telepen

Example:

```
#telepen("ABCD12345")
```

Result:



Ultracode

Example:

```
#ultra("1234567890")
```

Result:



Vehicle Identification Number

Example:

```
#vin("2GNFLGE30D6201432")
```

Result:



Facing Identification Mark

Example:

```
#fim("A")
```

Result:



Flattermarken

Used for marking book covers to indicate volume order.

Example:

```
#flat("123")
```

Result:



Symbology Values

Following symbology values are supported, each with the name Zint gives it:

`"Code11"`	Code 11
`"C25Inter"`	2 of 5 Interleaved
`"C25Logic"`	2 of 5 Data Logic
`"Code39"`	Code 39
`"EAN8"`	EAN-8 (European Article Number) GTIN-8
`"EAN5Addon"`	EAN/UPC 5-digit add-on (standalone)
`"EANXChk"`	EAN + Check Digit
`"GS1128"`	GS1-128
`"Code128"`	Code 128
`"DPIDENT"`	Deutsche Post Identcode
`"Code49"`	Code 49
`"Flat"`	Flattermarken
`"DBarLtd"`	GS1 DataBar Limited
`"Telepen"`	Telepen Alpha
`"UPCAChk"`	UPC-A including check digit
`"UPCEChk"`	UPC-E including check digit
`"MSIPlessey"`	MSI Plessey
`"Logmars"`	LOGMARS
`"PZN"`	Pharmazentralnummer
`"CEPNet"`	Brazilian CEPNet Postal Code
`"PDF417Comp"`	Compact PDF417 (Truncated PDF417)
`"QRCode"`	QR Code
`"AusPost"`	Australia Post Standard Customer
`"AusRoute"`	Australia Post Routing
`"ISBNX"`	ISBN
`"DataMatrix"`	Data Matrix (ECC200)
`"VIN"`	Vehicle Identification Number
`"NVE18"`	NVE-18 (SSCC-18)
`"KoreaPost"`	Korea Post
`"DBarOmnStk"`	GS1 DataBar Stacked Omnidirectional
`"Planet"`	USPS PLANET
`"USPSIMail"`	USPS Intelligent Mail (OneCode)
`"TelepenNum"`	Telepen Numeric
`"KIX"`	Dutch Post KIX Code
`"DAFT"`	DAFT Code
`"MicroQR"`	Micro QR Code
`"HIBC39"`	HIBC Code 39
`"HIBCQR"`	HIBC QR Code
`"HIBCMicPDF"`	HIBC MicroPDF417
`"HIBCAztec"`	HIBC Aztec Code
`"HanXin"`	Han Xin (Chinese Sensible) Code
`"UPUS10"`	Universal Postal Union S10
`"AzRune"`	Aztec Runes
`"EANXCC"`	EAN Composite
`"DBarOmnCC"`	GS1 DataBar Omnidirectional Composite
`"DBarExpCC"`	GS1 DataBar Expanded Composite
`"UPCECC"`	UPC-E Composite
`"DBarOmnStkCC"`	GS1 DataBar Stacked Omnidirectional Composite
`"Channel"`	Channel Code
`"GridMatrix"`	Grid Matrix
`"Ultra"`	Ultracode
`"BC412"`	IBM BC412 (SEMI T1-95)
`"EAN8CC"`	EAN-8 Composite
`"C25Standard"`	2 of 5 Standard (Matrix)
`"C25IATA"`	2 of 5 IATA
`"C25Ind"`	2 of 5 Industrial
`"ExCode39"`	Extended Code 39
`"EAN2Addon"`	EAN/UPC 2-digit add-on (standalone)
`"EANX"`	EAN (European Article Number)
`"EAN13"`	EAN-13 (European Article Number) GTIN-13
`"Codabar"`	Codabar
`"DPLEIT"`	Deutsche Post Leitcode
`"Code16k"`	Code 16k
`"Code93"`	Code 93
`"DBarOmn"`	GS1 DataBar Omnidirectional
`"DBarExp"`	GS1 DataBar Expanded
`"UPCA"`	UPC-A
`"UPCE"`	UPC-E
`"Postnet"`	USPS (U.S. Postal Service) POSTNET
`"FIM"`	Facing Identification Mark
`"Pharma"`	Pharmacode One-Track
`"PharmaTwo"`	Pharmacode Two-Track
`"PDF417"`	PDF417
`"MaxiCode"`	MaxiCode
`"Code128AB"`	Code 128 (Suppress Code Set C)
`"AusReply"`	Australia Post Reply Paid
`"AusRedirect"`	Australia Post Redirection
`"RM4SCC"`	Royal Mail 4-State Customer Code
`"EAN14"`	EAN-14
`"CodablockF"`	Codablock-F
`"JapanPost"`	Japanese Postal Code
`"DBarStk"`	GS1 DataBar Stacked
`"DBarExpStk"`	GS1 DataBar Expanded Stacked
`"MicroPDF417"`	MicroPDF417
`"Plessey"`	UK Plessey
`"ITF14"`	ITF-14
`"Aztec"`	Aztec Code
`"DPD"`	DPD Code
`"HIBC128"`	HIBC (Health Industry Barcode) Code 128
`"HIBCDM"`	HIBC Data Matrix
`"HIBCPDF"`	HIBC PDF417
`"HIBCCodablockF"`	HIBC Codablock-F
`"DotCode"`	DotCode
`"Mailmark2D"`	Royal Mail 2D Mailmark (CMDM) (Data Matrix)
`"Mailmark4S"`	Royal Mail 4-State Mailmark
`"Code32"`	Code 32
`"GS1128CC"`	GS1-128 Composite
`"DBarLtdCC"`	GS1 DataBar Limited Composite
`"UPCACC"`	UPC-A Composite
`"DBarStkCC"`	GS1 DataBar Stacked Composite
`"DBarExpStkCC"`	GS1 DataBar Expanded Stacked Composite
`"CodeOne"`	Code One
`"UPNQR"`	UPNQR (Univerzalnega Plačilnega Naloga QR)
`"RMQR"`	Rectangular Micro QR Code (rMQR)
`"DXFilmEdge"`	DX Film Edge Barcode on 35mm and APS films
`"EAN13CC"`	EAN-13 Composite