

Proteograph

Typst proteomics package

v0.2.5

September 25, 2026

<https://codeberg.org/olangella/proteograph>

Olivier Langella

ABSTRACT

proteograph is a package defining [Typst](#) functions dedicated to proteomics.

CONTENTS

Reference	2
XIC (eXtracted Ion Chromatogram) plot	2
XIC plot full documentation	3
Retention time alignment	8
Retention time alignment full documentation	9
MS2 spectra	11
MS2 spectra full documentation	18
Protein sequence	21
Protein sequence documentation	21
Protein diagram	22
Protein diagram documentation	22
Isotope pattern plot	23

REFERENCE

XIC (eXtracted Ion Chromatogram) plot

Example :


```
#import "@preview/tegraph:0.2.5": *

#let data_json = json("../examples/data/pepalb35.json")

#let xic0 = data_json.found_list_first_pass.first().xics.first().trace
#xic0.insert("title", "isotope 0")
#let xic1 = data_json.found_list_first_pass.first().xics.at(1).trace
#xic1.insert("title", "isotope 1")
#xic1.insert("peak-
begin", data_json.found_list_first_pass.first().xics.at(1).peak.rt.first())
#xic1.insert("peak-
end", data_json.found_list_first_pass.first().xics.at(1).peak.rt.last())
#let xic2 = data_json.found_list_first_pass.first().xics.at(2).trace
#xic2.insert("title", "isotope 2")
#xic2.insert("peak-
begin", data_json.found_list_first_pass.first().xics.at(2).peak.rt.first())
#xic2.insert("peak-
end", data_json.found_list_first_pass.first().xics.at(2).peak.rt.last())

#xic-plot(
  height: 10cm,
  title: "XIC E[MOD:00394]PSHWETISTGGLK z=2",
  rt-range: (3830, 3900),
  max-intensity: 10000,
  xic0,
  xic1,
  xic2,
)
```

Result :

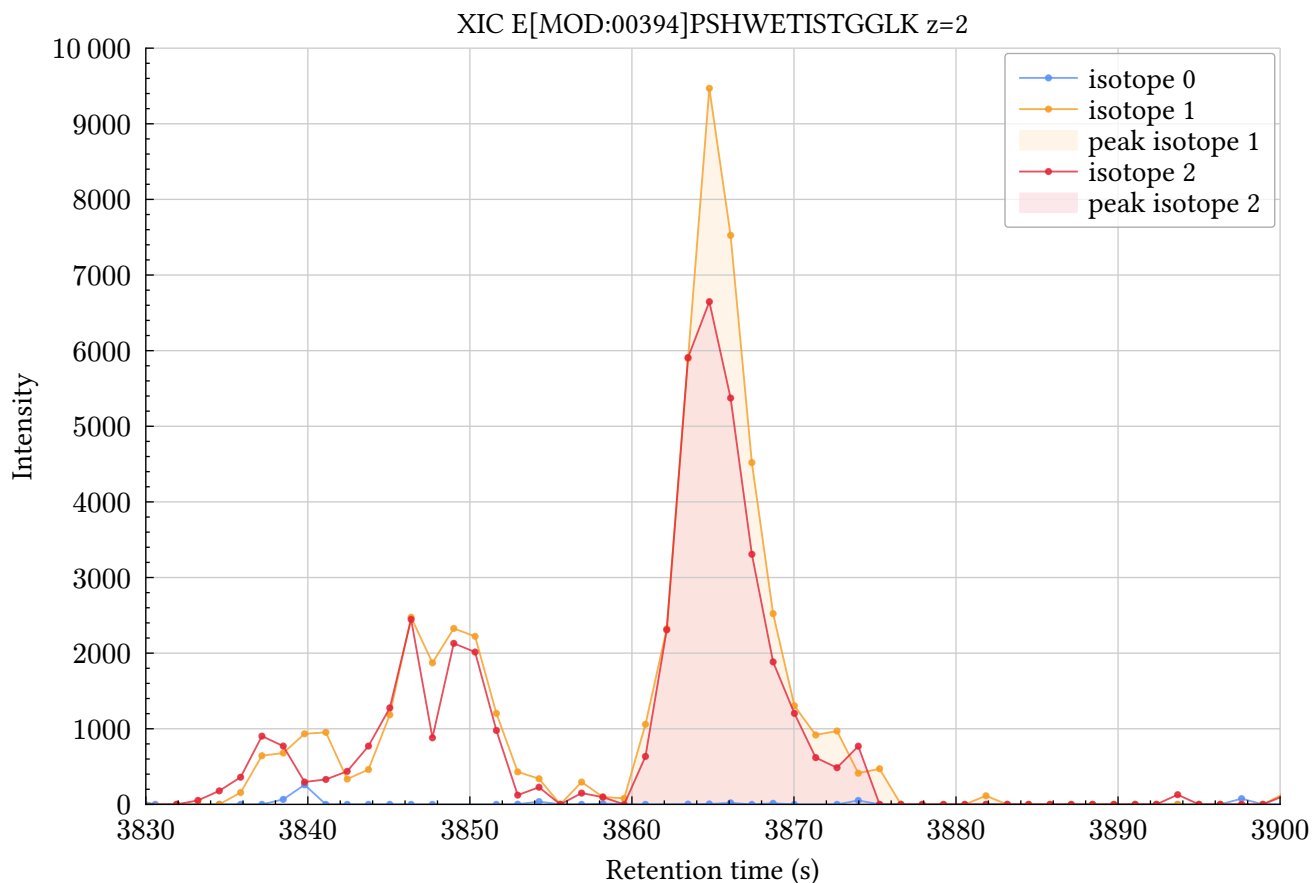

XIC plot full documentation

- [xic-isotope-plot\(\)](#)
- [xic-plot\(\)](#)

xic-isotope-plot

Generates a XIC plot separating istope pattern by charge

Parameters

```
xic-isotope-plot(  
  width: length relative ,  
  height: length relative ,  
  rt-range: auto array ,  
  max-intensity: none float ,  
  title: content ,  
  ..xic-item: dictionary  
) -> content
```

width `length` or `relative`

The width of the diagram. This can be

- A `length` ; in this case, it defines just the width of the data area, excluding axes, labels, title etc.
- A `ratio` or `relative` where the ratio part is relative to the width of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded width, e.g., a page with `width: auto` .

Default: `15cm`

height `length` or `relative`

The height of the diagram. This can be

- A `length` ; in this case, it defines just the height of the data area, excluding axes, labels, title etc.
- A `ratio` or `relative` where the ratio part is relative to the height of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded height, e.g., a page with `height: auto` .

Default: `10cm`

rt-range `auto` or `array`

Data limits along the x-axis (retention time in seconds). Expects auto or a tuple (min, max) where min and max may individually be auto

Default: `auto`

max-intensity `none` or `float`

Maximum intensity to display. **Optional.**

Example: `30000`

Default: `none`

title `content`

Graph title

Default: `none`

..xic-item dictionary

dictionary containing XIC data

```
1  /// XIC dictionary structure type
2  #let xic_item = (
3    /// Array of retention times values
4    "x": (),
5    /// Array of intensity values
6    "y": (),
7    /// Title for this XIC
8    "title": "title for this XIC"
9    /// Detected peak retention time start. *Optional*.
10   "peak-begin": 3500,
11   /// Detected peak retention time end. *Optional*.
12   "peak-end": 3500,
13   /// Charge.
14   "charge": none,
15   /// Isotope number.
16   "isotope": none,
17 )
```

xic-plot

Generates a XIC plot.

Parameters

```
xic-plot(
  width: length relative,
  height: length relative,
  rt-range: auto array,
  max-intensity: none float,
  title: content,
  rt-units: string,
  hist,
  ..xic-item: dictionary
) -> content
```

width length or relative

The width of the diagram. This can be

- A `length` ; in this case, it defines just the width of the data area, excluding axes, labels, title etc.
- A `ratio` or `relative` where the ratio part is relative to the width of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded width, e.g., a page with `width: auto`.

Default: `15cm`

height `length` or `relative`

The height of the diagram. This can be

- A `length` ; in this case, it defines just the height of the data area, excluding axes, labels, title etc.
- A `ratio` or `relative` where the ratio part is relative to the height of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded height, e.g., a page with `height: auto` .

Default: `10cm`

rt-range `auto` or `array`

Data limits along the x-axis (retention time in seconds). Expects auto or a tuple (min, max) where min and max may individually be auto

Default: `auto`

max-intensity `none` or `float`

Maximum intensity to display. **Optional.**

Example: `30000`

Default: `none`

title `content`

Graph title

Default: `none`

rt-units `string`

retention time units

Default: `"seconds"`

..xic-item dictionary

dictionary containing XIC data

```
1  /// XIC dictionary structure typc
2  #let xic_item = (
3    /// Array of retention times values
4    "x": (),
5    /// Array of intensity values
6    "y": (),
7    /// Title for this XIC
8    "title": "title for this XIC"
9    /// Detected peak retention time start. *Optional*.
10   "peak-begin": 3500,
11   /// Detected peak retention time end. *Optional*.
12   "peak-end": 3500,
13 )
```

Retention time alignment

The alignment of retention times between MS runs done with MassChroQ3 are represented as follow in the JSON output

MS run alignment data

```
{
  "corrections": {
    "msrun1": {
      "aligned": [],
      "ms2_delta_rt": {
        "x": [],
        "y": []
      },
      "ms2_mean": [],
      "ms2_median": [],
      "original": []
    },
    "msrun2": {
      "aligned": [],
      "ms2_delta_rt": {
        "x": [],
        "y": []
      },
      "ms2_mean": [],
      "ms2_median": [],
      "original": []
    },
    "msrun3": {
      "aligned": [],
      "ms2_delta_rt": {
        "x": [],
        "y": []
      },
      "ms2_mean": [],
      "ms2_median": [],
      "original": []
    },
    "msrun_ref": "msrun4"
  }
}
```

Example :

```
#import "@preview/teproteograph:0.2.5": *


#let rt_align = json("../examples/data/one_alignment.json")
#rtalign-plot(
  title: "Retention time drift corrections",
  ylim: auto,
  ms2-delta-rt: rt_align.ms2_delta_rt,
  aligned: rt_align.aligned,
  ms2-mean: rt_align.ms2_mean,
```

```

ms2-median: rt_align.ms2_median,
original: rt_align.original,
)

```

Result :

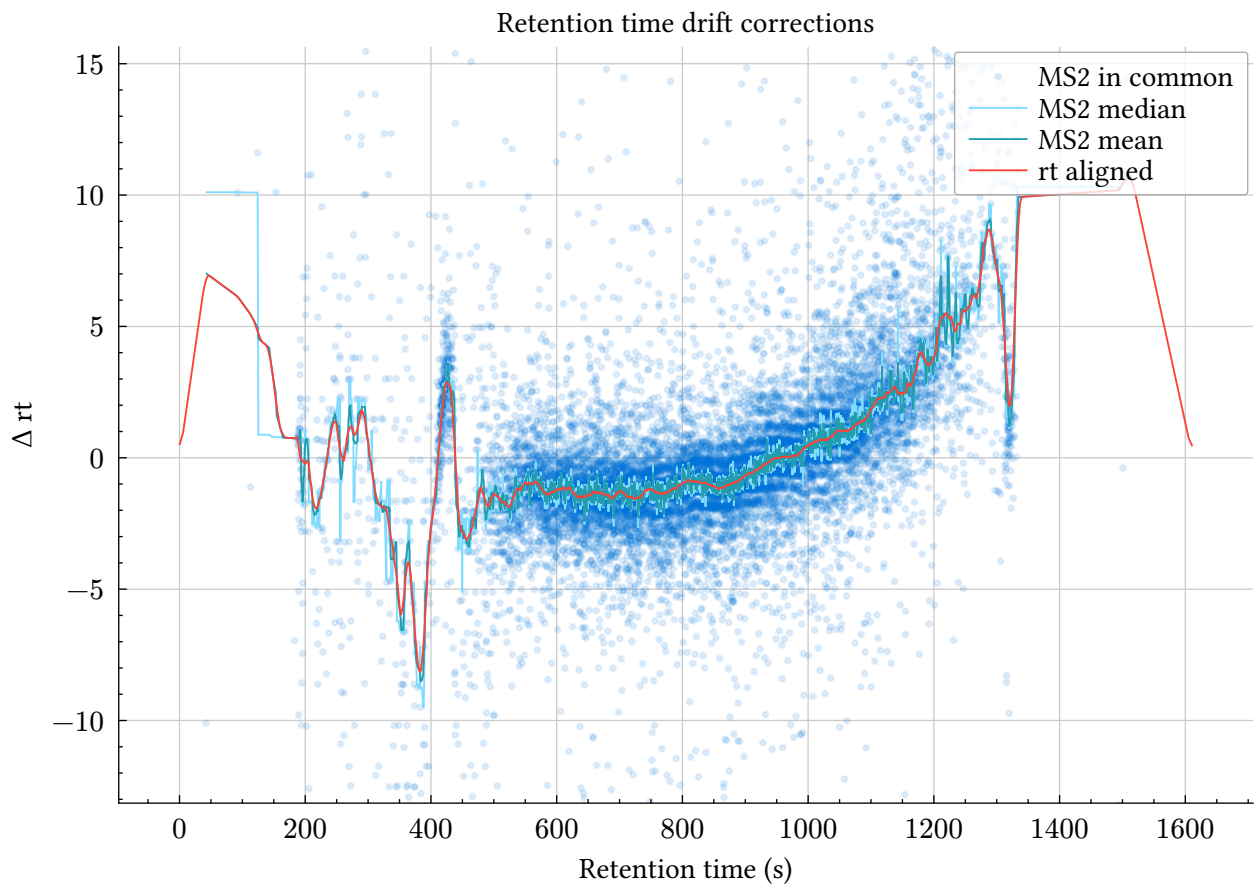

Retention time alignment full documentation

- [rtalign-plot\(\)](#)

rtalign-plot

retention time delta plot between MS runs plot.

Parameters

```

rtalign-plot(
  width: length relative,
  height: length relative,
  xlim: auto array,
  ylim: auto array,
  title,
  original,
  aligned,
  ms2-delta-rt,
  ms2-mean,
  ms2-median
) -> content

```

width `length` or `relative`

The width of the diagram. This can be

- A `length` ; in this case, it defines just the width of the data area, excluding axes, labels, title etc.
- A `ratio` or `relative` where the ratio part is relative to the width of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded width, e.g., a page with `width: auto` .

Default: `15cm`

height `length` or `relative`

The height of the diagram. This can be

- A `length` ; in this case, it defines just the height of the data area, excluding axes, labels, title etc.
- A `ratio` or `relative` where the ratio part is relative to the height of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded height, e.g., a page with `height: auto` .

Default: `10cm`

xlim `auto` or `array`

Data limits along the x-axis (retention time in seconds). Expects `auto` or a tuple (min, max) where min and max may individually be `auto`

Default: `auto`

ylim `auto` or `array`

Data limits along the y-axis (retention time delta in seconds). Expects `auto` or a tuple (min, max) where min and max may individually be `auto`

Default: `auto`

MS2 spectra

Simple MS2 spectra

The spectra is a dictionary containing 2 arrays of floats : mz and intensity


spectra dictionary

```
{  
  "intensity": [  
    2,  
    2,  
    100,  
    5,  
    7,  
    2  
  ],  
  "mz": [  
    155.081,  
    157.097,  
    157.133,  
    158.092,  
    158.137,  
    159.076  
  ]  
}
```

Example :

```
#import "@preview/teproteograph:0.2.5": *  
  
#let complete_psm = json("../examples/data/complete_psm.json")  
#ms2spectra-plot(height: 5cm, title: "AIADGSLLDLLR", spectra: complete_psm.spectra)
```

Result :

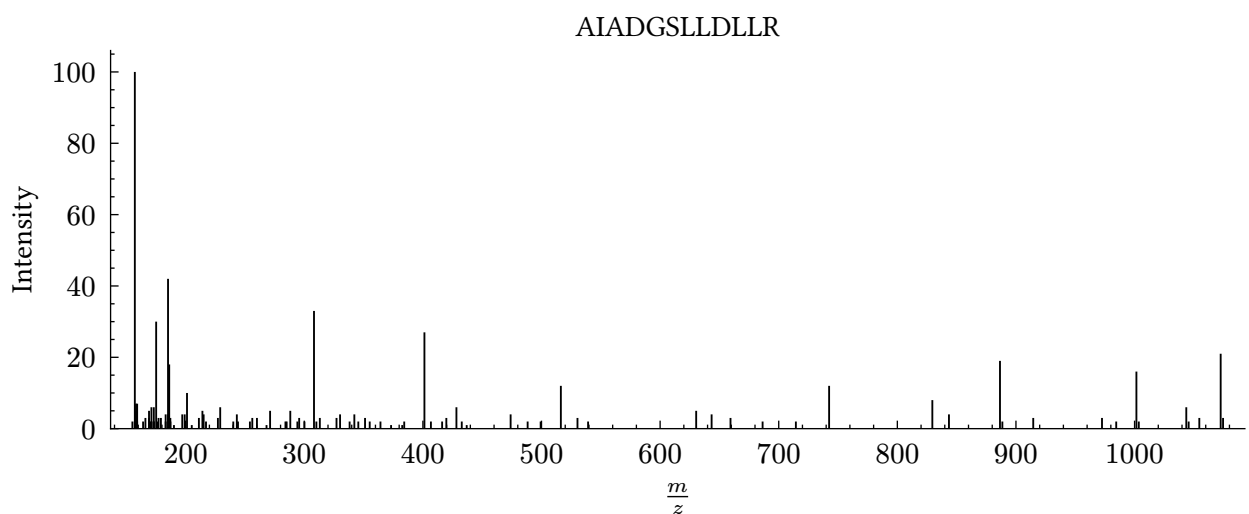

MS2 spectra with ion annotations

This example shows an MS2 spectra with ion series annotation

The ion annotations are described in a dictionary :

ion-series dictionary

```
{
  "a": [
    {
      "charge": 1,
      "intensity": 100,
      "mz": 157.133,
      "mzth": 157.13353961189497,
      "size": 2
    }
  ],
  "b": [
    {
      "charge": 1,
      "intensity": 42,
      "mz": 185.128,
      "mzth": 185.12845423145498,
      "size": 2
    },
    {
      "charge": 1,
      "intensity": 3,
      "mz": 256.165,
      "mzth": 256.16556801702,
      "size": 3
    }
  ]
}
```

The first key is the ion series name as follow :

y, b, yp, ystar, y*, yO, x, bstar, b*, bO, a, astar, aO, c, z, bp

and any ion can be described by :

- [ion-description\(\)](#)

ion-description

Ion description

Parameters

```
ion-description(
  "charge": integer,
  "intensity": float,
  "mz": float,
  "mzth": float,
  "size": integer
)
```

"charge" integer

Ion charge

Default: 1

"intensity" float

Ion intensity

Default: none

"mz" float

Ion experimental mass on charge ratio

Default: none

"mzth" float

Ion theoretical mass on charge ratio. **Optional.**

Default: none

"size" integer

Ion size : number of residues for this fragment

Default: 1


Example :

```
#import "@preview/tegraph:0.2.5": *
```

```
#let complete_psm = json("../examples/data/complete_psm.json")
```

```
#ms2spectra-plot(title: "AIADGSLLDLLR", spectra: complete_psm.spectra, ion-series:  
complete_psm.ion-series)
```

Result :

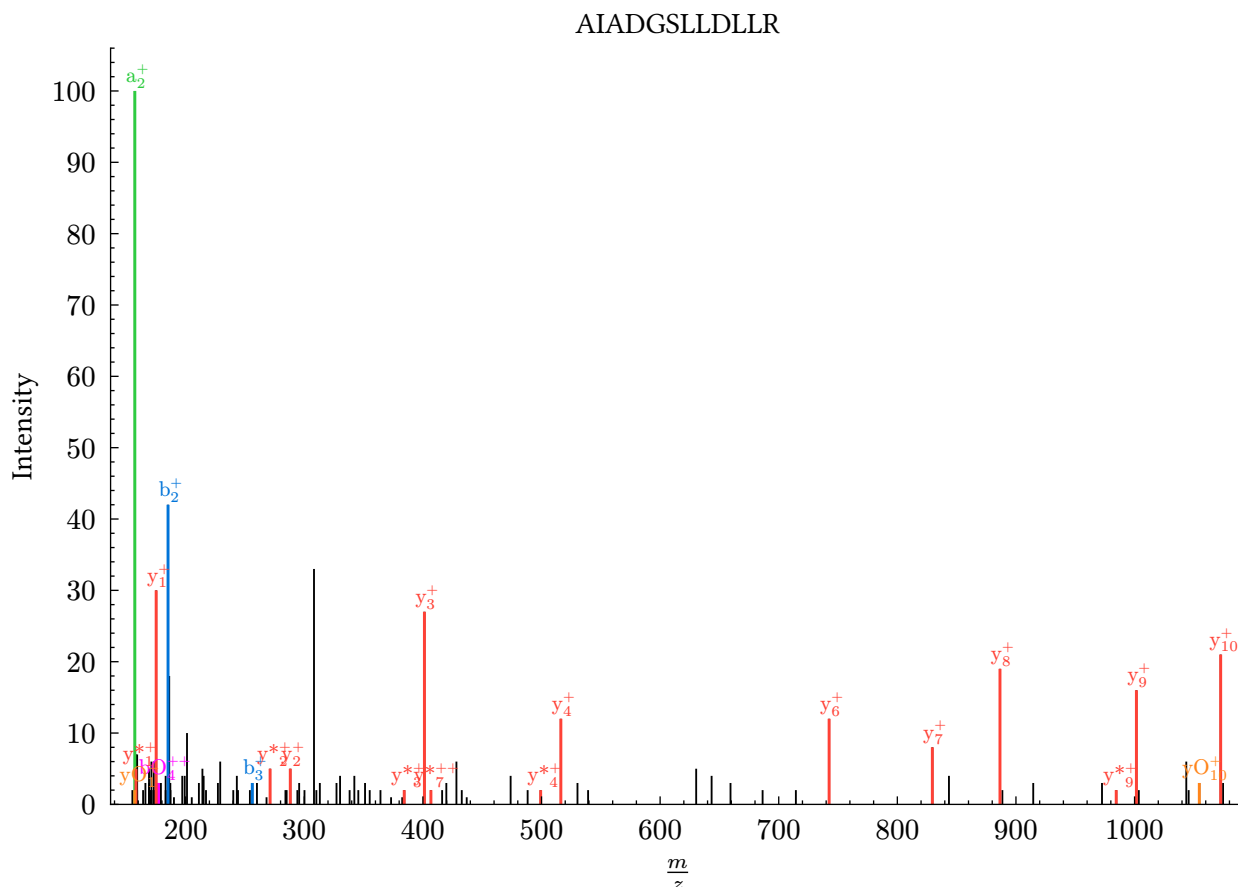

MS2 spectra zoom (mz_range and intensity)


This example shows an MS2 spectra zoomed on a specific m/z range and maximum intensity.

Example :

```
#import "@preview/teograp:0.2.5": *

#let complete_psm = json("../examples/data/complete_psm.json")
#ms2spectra-plot(
  width: 15cm,
  height: 5cm,
  title: "AIADGSLLDLLR",
  spectra: complete_psm.spectra,
  ion-series: complete_psm.ion-series,
  mz-range: (450, 950),
  max-intensity: 30,
)
```

Result :

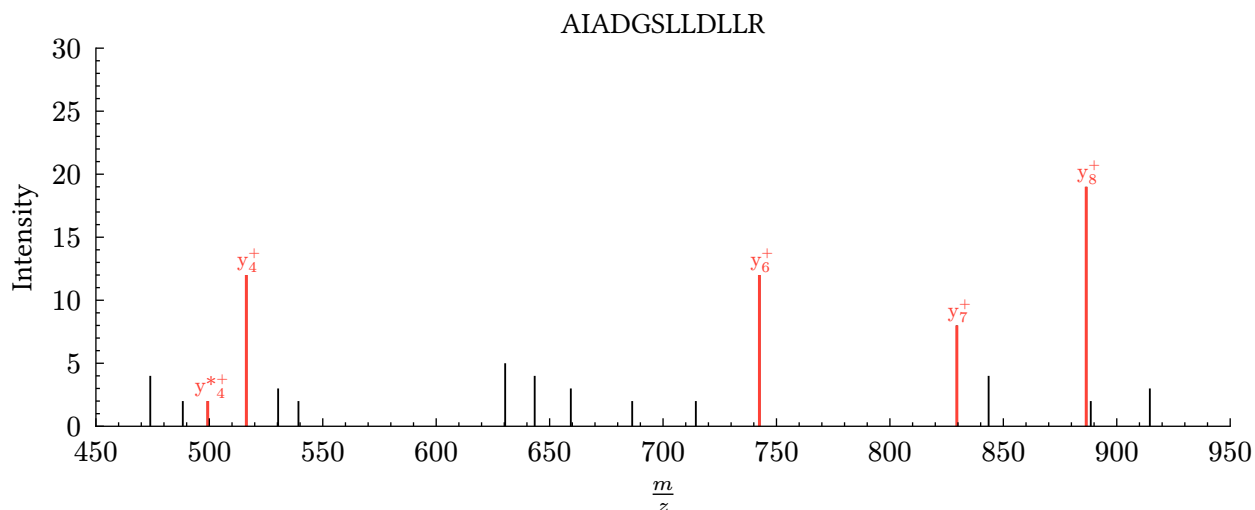

MS2 spectra with ion annotations and MS2 fragments mass delta


This example shows an MS2 spectra with ion series annotation

Example :

```
#import "@preview/proteograph:0.2.5": *

#let complete_psm = json("../examples/data/complete_psm.json")
#ms2spectra-plot(
  width: 15cm,
  height: 10cm,
  spectra: complete_psm.spectra,
  ion-series: complete_psm.ion-series,
  delta-fragments: true,
)
```

Result :

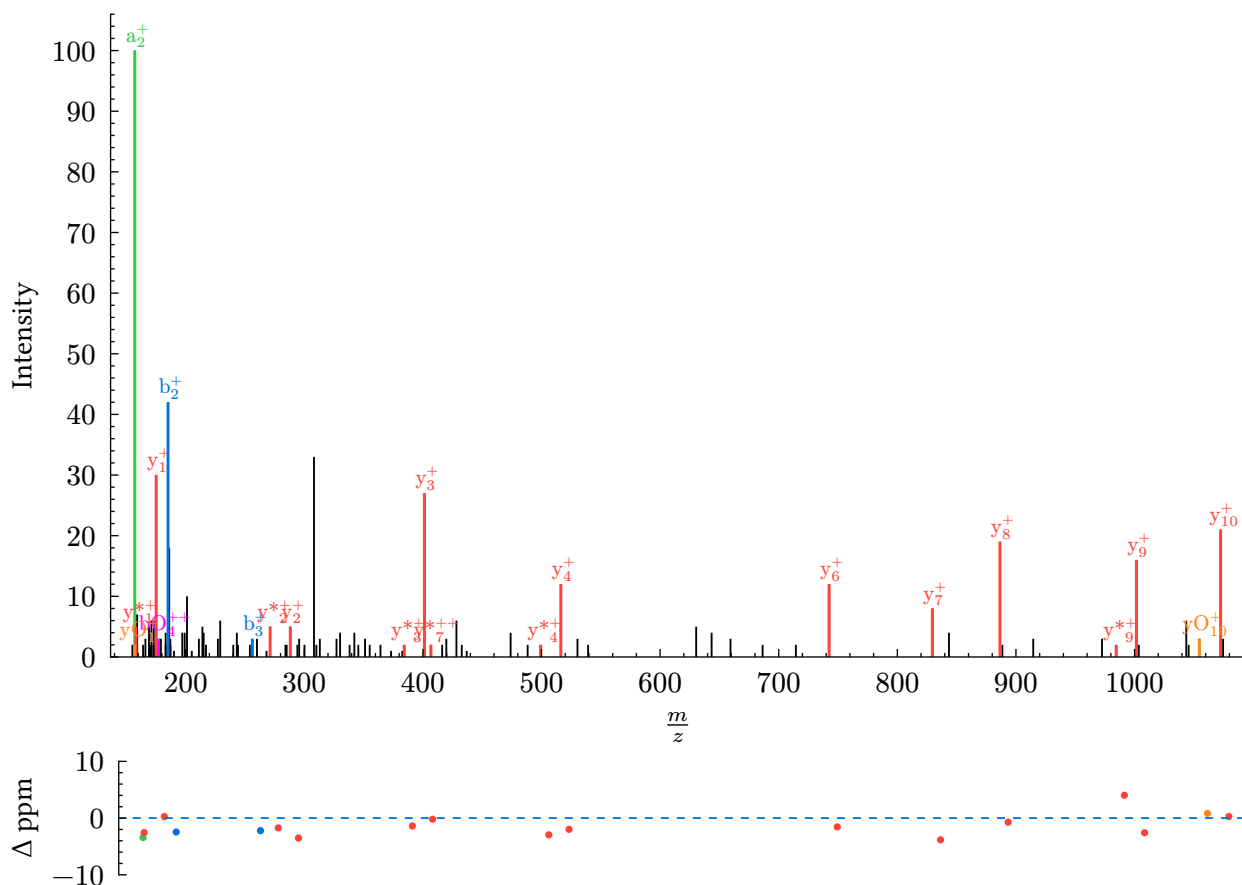

MS2 spectra with ion annotations and highlighted mass delta between peaks

The space between two peaks can be highlighted and manually annotated using an array defined as follow

Highlight space between peaks array

```
[
{
  "ion": "y",
  "mz": [401.287,516.313],
  "level": 1,
  "label": "D"
},
{
  "ion": "y",
  "mz": [742.481,829.511],
  "level": 1,
  "label": "S"
},
{
  "ion": "y",
  "mz": [829.511,886.535],
  "level": 1,
  "label": "G"
},
],
```

```
{
  "ion": "y",
  "mz": [886.535, 1001.56],
  "level": 1,
  "label": "D"
}
]
```


Example :

```
#import "@preview/proteograph:0.2.5": *

#let delta_arr = (
  (
    "ion": "y",
    "mz": (401.287, 516.313),
    "level": 1,
    "label": "D",
  ),
  (
    "ion": "y",
    "mz": (742.481, 829.511),
    "level": 1,
    "label": "S",
  ),
  (
    "ion": "y",
    "mz": (829.511, 886.535),
    "level": 1,
    "label": "G",
  ),
  (
    "ion": "y",
    "mz": (886.535, 1001.56),
    "level": 1,
    "label": "D",
  ),
  (
    "ion": "y",
    "mz": (742.481, 1001.56),
    "level": 2,
    "label": "DGS",
  ),
)

#let complete_psm = json("../examples/data/complete_psm.json")
#ms2spectra-plot(
  width: 15cm,
  height: 7cm,
  max-intensity: 45,
  title: "AIADGSLLDLLR",
  spectra: complete_psm.spectra,
  ion-series: complete_psm.ion-series,
  delta: delta_arr,
)
```

Result :

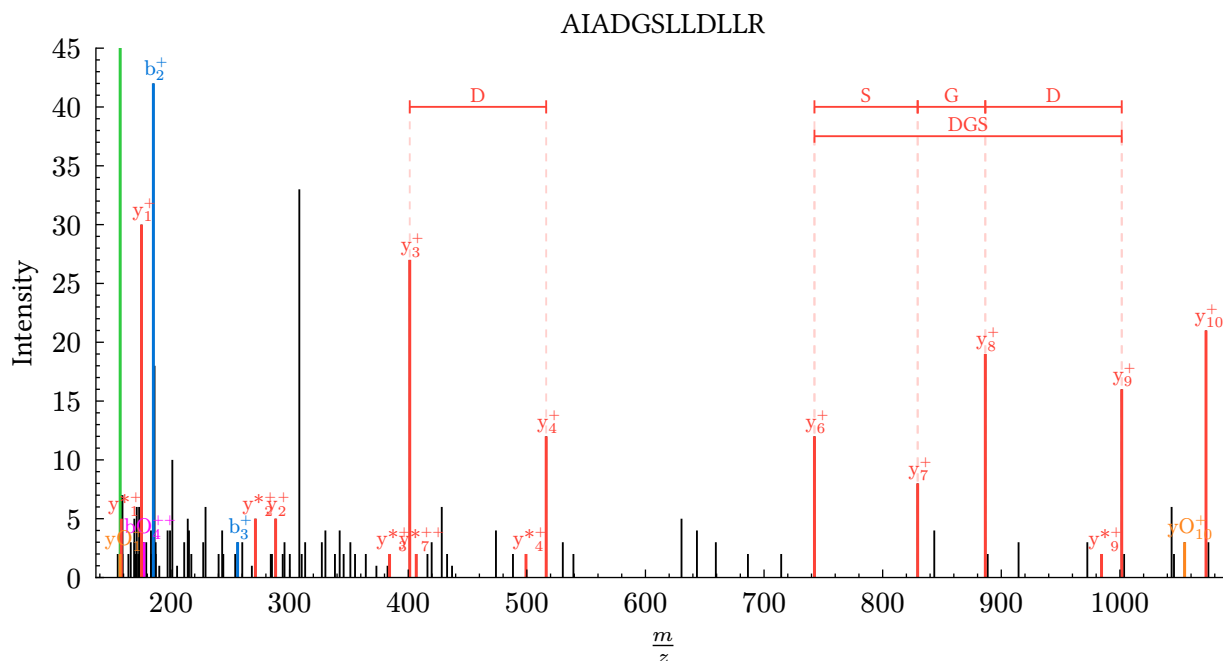

MS2 spectra full documentation

- [ms2spectra-plot\(\)](#)

ms2spectra-plot

Generates an annotated MS2 spectra plot.

Parameters

```
ms2spectra-plot(  
    width: length relative,  
    height: length relative,  
    title: str content,  
    mz-range: none array,  
    max-intensity: none float,  
    spectra: none dictionary,  
    ion-series,  
    delta,  
    delta-fragments: bool  
) -> content
```

width length or relative

The width of the diagram. This can be

- A **length** ; in this case, it defines just the width of the data area, excluding axes, labels, title etc.
- A **ratio** or **relative** where the ratio part is relative to the width of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded width, e.g., a page with **width: auto** .

Default: **15cm**

height `length` or `relative`

The height of the diagram. This can be

- A `length` ; in this case, it defines just the height of the data area, excluding axes, labels, title etc.
- A `ratio` or `relative` where the ratio part is relative to the height of the parent that the diagram is placed in. This is not allowed if the parent has an unbounded height, e.g., a page with `height: auto` .

Default: `10cm`

title `str` or `content`

Shows the plot title. **Optional**.

Default: `none`

mz-range `none` or `array`

m/z range to display. **Optional**.

Example: (`450`, `950`)

Default: `none`

max-intensity `none` or `float`

maximum intensity to display. **Optional**.

Example: `30000`

Default: `none`

spectra `none` or `dictionary`


Mass spectra values. **Optional.**

a dictionary with the keys `mz` (array of mass to charge ratios) and `intensity` (array of intensities) with the same length for each array

(e.g., `spectra: (mz: (256.45, 356.89, 523.78), intensity: (200, 298, 253))`)

```
1 #import "@preview/  
  proteograph:0.2.5": *  
2 #set text(size: 12pt)  
  #ms2spectra-plot( spectra: (mz:  
3    (256.45, 356.89, 523.78), intensity:  
    (200, 298, 253)))
```

typ

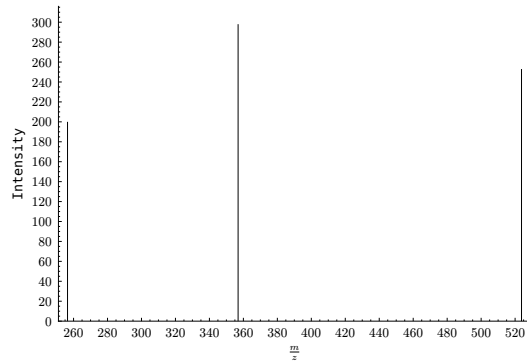

Default: `none`

delta-fragments `bool`

Whether to clip the matched ion mass delta to the plot. **Optional.**

Default: `false`

Protein sequence

Example :

```
#import "@preview/tegraph:0.2.5": *
```

```
#protein-sequence(  
  line-length: 60,  
  "MASTKAPGPGEKHHSIDAQLRQLVPGKVSDDKLEIYDALLVDRFLNILQDLHGPSLREFVQECYEVSADYEGKGDTTKLGEKGAKLTGLAPADAIL  
)
```

Result :

```
0  MASTKAPGPGEKHHSIDAQLRQLVPGKVSDDKLEIYDALLVDRFLNILQDLHGPSLREF  
60  VQECYEVSADYEGKGDTTKLGEKGAKLTGLAPADAILVASSILHMLNLANLAEVQIAHR  
120 RRNSKLKKGFADEGSATTESDIEETLKRVLSEVGKSPEEVFEALKNQTVDLVFTAHTQ  
180 SARRSLQKNARIRNCLTQLNAKDITDDDKQELDEALQREIQAAFRTDEIRRAQPTPQDE  
240 MRYGMSYIHETVWKGVPKFLRRVDTALKNIGINERLPYNVSLIRFSSWMGGDRDGNPRVT  
300 PEVTRDVCLLARMMAANLYIDQIEELMFELSMWRCNDELRVRAEELHSSSGSKVTYYYIE  
360 FWKQIPPNEPYRVILGHVRDKLYNTRERARHLLASGVSEISAESSFTSIEEFLEPLELCY  
420 KSLCDCGDKAIADGSLDLLRQVFTFGLSLVKLDIRQESERHTDVIDAITTHLGIGSYRE  
480 WPEDKRQEWLLSELRGKRPLLPDLPQTDEIADVIGAFHVLAEPPDSFGPYIISMATAP  
540 SDVLAVELLQRECGVRQPLPVVPLFERLADLQSAPASVERLFSVDWYMDRIKGKQVMVG  
600 YSDSGKDAGRLSAWQLYRAQEEMAQVAKRYGVKLTLFHGRGGTVGRGGPHTLAISQP  
660 PDTINGSIRVTVQGEVIEFCFGEELCFQTLQRFTAATLEHGMHPPVSPKPEWRKLMDEM  
720 AVVATEEYRSVVVKEARFVEYFRSATPETEYGRMNIGSRPAKRPPGGGITTLEIPWIFS  
780 WTQTRFHLPVWLGVAFAFKFAIDKDVRNFQVLKEMYNEWPFVRVTLDLLEMVFAKGDPGI  
840 AGLYDELLVAEELKPFQKQLRDKYVETQQLLLQIAGHKDILEGDPFLKQGLVLRNPYITT  
900 LNVFQAYTLKRIRDPNFKVTPQPPLSKEFADENKPAGLVKLNPASEYPPGLEDTLILTMK  
960 GIAAGMQNTGA
```

Protein sequence documentation

- [protein-sequence\(\)](#)

protein-sequence

Display a protein sequence in a block with amino acid numbering

Parameters

```
protein-sequence(  
  line-length,  
  protein  
) -> content
```

line-length

The maximum length of amino acid to display in a line. **Optional**.

Default: 50

protein

Amino acid sequence (one letter code) of the protein to display

Protein diagram

This figure is based on the [fletcher](#) package features.

Example :

```
#import "@preview/teotogo:0.2.5": *

#let tint(c) = (stroke: c, fill: rgb(..c.components().slice(0, 3), 5%), inset: 1pt)

#protein-diag(
  line-length: 60,
  "MASTKAPGPGGEKHHSIDAQLRQLVPGKVSDDKLI EYDALLVDRFLNILQDLHGPSLREFVQECYEVSADYEGKGD TTKLGELGAKLTGLAPADAILVASSILHMLNLANLAEEVQIAHR
  (pos: (1, 5), style: tint(green)),
  (pos: (12, 17), style: tint(teal)),
  (pos: (75, 177), style: tint(red)),
)
```

Result :

```
MASTKAPGPGGEKHHSIDAQLRQLVPGKVSDDKLI EYDALLVDRFLNILQDLHGPSLREF
VQECYEVSADYEGKGD TTKLGELGAKLTGLAPADAILVASSILHMLNLANLAEEVQIAHR
RRNSKLLKGGFADEGSATTESDIEETLKRLVSEVGKSP EEFVFEALKNQTVDLVFTAHPTQ
SARRSLLQKNARIRNCLTQLNAKDITDDDKQELDEALQREIQAAFRTDEIRRAQPTPQDE
MRYGMSYIHETVWKGVPKFLRRVD TALKNIGINERLPYNVSLIRFSSWMGGDRDGNPRVT
PEVTRDVCLLARMMAANLYIDQIEELMFELSMWRCNDEL RVRAEELHSSSGSKVTKYIE
FWKQIPPNEPYRVILGHVRDKLYNTRERARHLLASGVSEISAESSFTSIEEFLEPLELCY
KSLCDCGDKAIADGSLLDLLRQVFTFGLSLVKLDIRQESERHTDVIDAITTHLGIGSYRE
WPEDKRQEWLLSELRGKRPLLPDLPQTDEIADVIGAFHVLAELPPDSFGPYIISMATAP
SDVLAVELLQRECGVRQPLPVVPLFERLADLQSAPASVERLFSVDWYMDRIK GKQQVMVG
YSDSGKDAGRLSAAWQLYRAQEEMAQVAKRYGVKLTLFHGRGGTVGRGGP THLAILSQP
PDTINGSIRVTVQGEVIEFCFGEEHLCFQTLQRFTAATLEHGMHPPVSPKPEWRKLMDEM
AVVATEEYRSVVVKEARFVEYFRSATPETEYGRMNIGSRPAKRRPGGGITT LRAIPWIFS
WTQTRFHLPVWLGVGA AFKFAIDKDVRNFQVLKEMYNEWPFVRVTLDLLEMVFAKGDPGI
AGLYDELLVAEELKPF GKQLRDKYVETQQLLLQIAGHKDILEGDPFLKQGLVLRNPYITT
LNVFQAYTLKRIRDPNFKVTPQPPLSKEFADENKPAGLVKLNPA SEYPPGLEDTLILTMK
GIAAGMQNTGA
```

Protein diagram documentation

- [protein-diag\(\)](#)

protein-diag

Display a protein sequence in a block with amino acid numbering

Parameters

```
protein-diag(
  line-length: int,
  boxes: array,
  protein: str,
  ..box: dictionary
) -> content
```

line-length `int`

The maximum length of amino acid to display in a line. **Optional**.

Default: `50`

boxes `array`

Array of boxes to draw in the protein sequence **Optional**.

This can be used to visualize the position of one or more peptides

example for 3 peptides :

```
((pos: (1,5), style: tint(green)),(pos: (12,17), style: tint(teal)),(pos: (75,177), style: tint(red)))
```

Default: `()`

protein `str`

Amino acid sequence (one letter code) of the protein to display

..box `dictionary`

box item to draw in the protein sequence **Optional**.

This can be used to visualize the position of one or more peptides

example :

```
(pos: (1,5), style: tint(green))
```

```
1 #import "@preview/
2 #proteograph:0.2.5": *
3 "MASTKAPGPGGEKHHSIDAQLRQLV",
4 (pos: (1,5), style: (stroke: red,
5 inset: 1pt)),
6 (pos: (12,17), style: (stroke: teal,
7 inset: 3pt))
8 )
```



Isotope pattern plot

Example :

```
#import "@preview/proteograph:0.2.5": *
```

```
#isotope-pattern-plot(
  mz: (792.89009986061, 793.3914387289032, 793.8927444414951),
  intensity: (22000, 18000, 8000),
  th-ratio: (0.4182709626684006, 0.3428843140088085, 0.157722041765769),
  color: orange,
)
```

Result :

