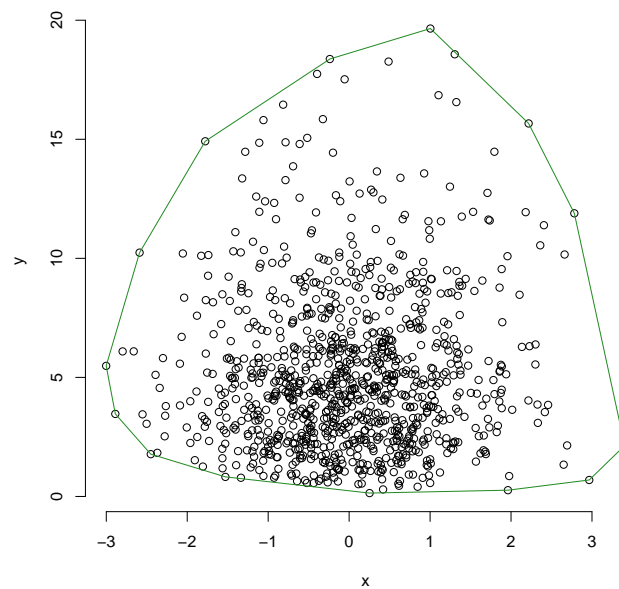# Title

```r
n <- 1000
x <- rnorm(n)
y <- rchisq(n,df=5)
```

Obtain a scatterplot of y vs x.

```r
plot(x, y, bty="n")
ch <- chull(x,y)
ch <- c(ch,ch[1])
lines(x[ch], y[ch], col="forestgreen")
```


To evaluate a cached R object value, use the command \Sexpr{...}:
e.g. n=1000.

Ty Stanford
February 11, 2016