



One recording  $x$   
 $A = \text{dog}, B = \text{rooster}$




Both relations hold in  $x$ ;  
each query has a different target.

(a) Inverse-relation pairs

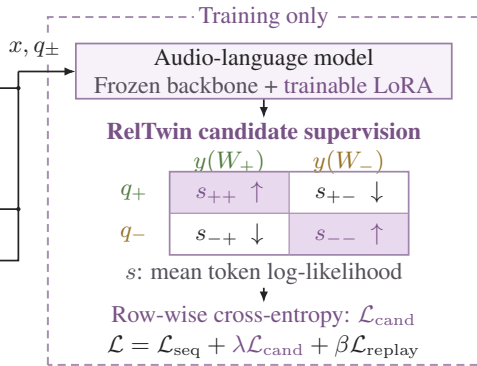

(b) Paired answer supervision

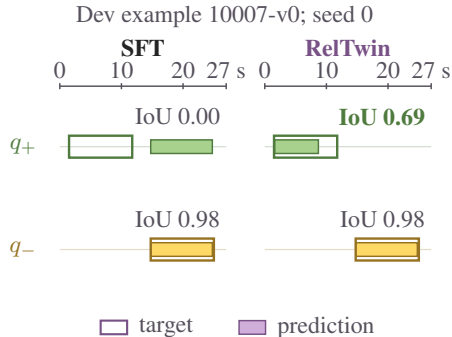

(c) Query-specific localization