



One recording x

$A = \text{dog}, B = \text{rooster}$




Both relations hold in x ;
each query has a different target.

(a) Inverse-relation pairs

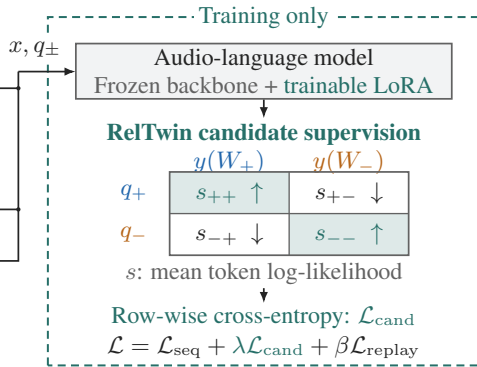

(b) Paired answer supervision

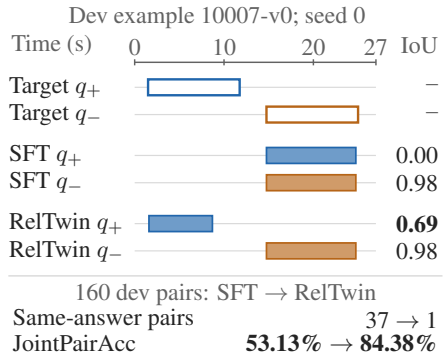

(c) Query-specific localization

Inference

Audio + query

Adapted timestamp generator

Predicted intervals

Candidate-free inference