



One recording x

$A = \text{dog}, B = \text{rooster}$




Both relations hold in x ;
each query has a different target.

(a) Inverse-relation pairs

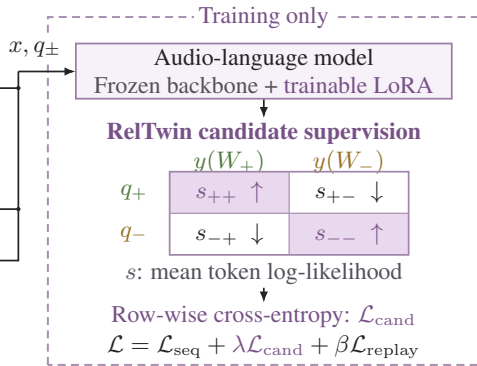

(b) Paired answer supervision

Dev example 10007-v0; seed 0

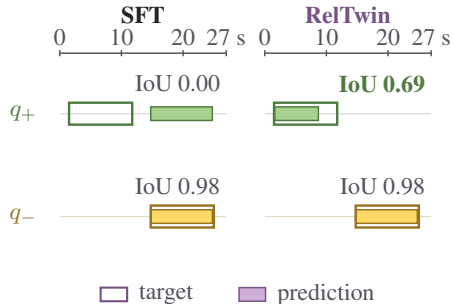

(c) Query-specific localization