

One color per domain. One map throughout the talk.



A PERSISTENT CHIPS / RECOMMENDED



Activate both domains at a handoff.


B UNDERLINED SECTIONS



C REPEATED MINI-MAP



Two responsibility blocks, shared infrastructure

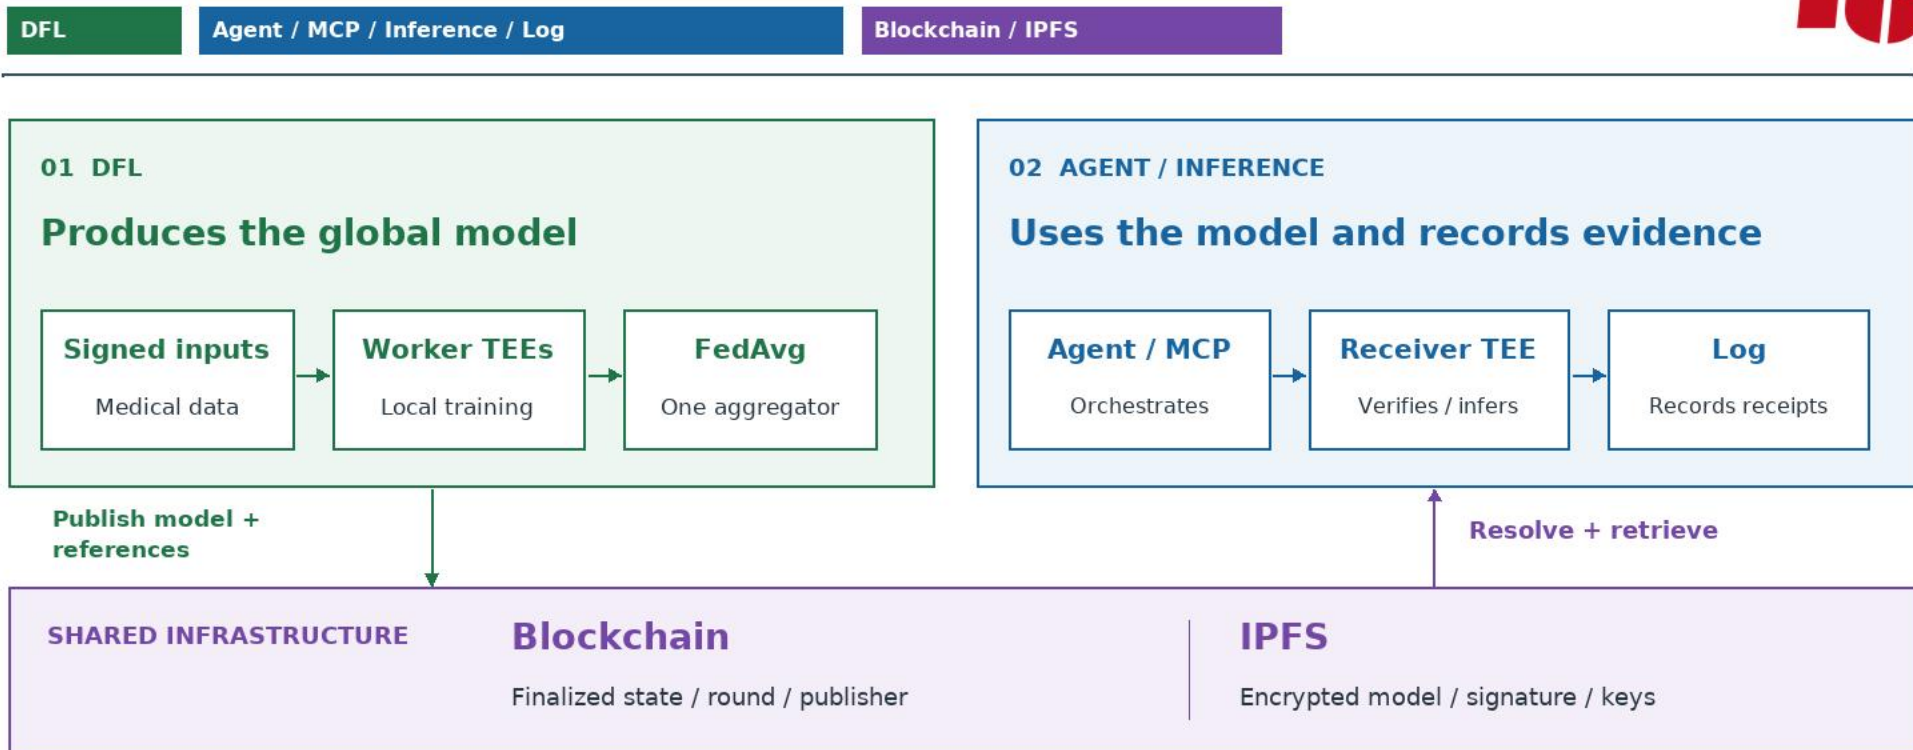

Finalized references and encrypted artifacts connect model production to verified use.

The receiver resolves the model independently



DFL

Agent / MCP / Inference / Log

Blockchain / IPFS

Agent: prepare current model

No caller-selected CID, round, publisher or path

BLOCKCHAIN / AUTHORITY

Finalized round + CIDs
Publisher-key snapshot

IPFS / ARTIFACTS

Encrypted model + signature
Recipient key bundle

MEASURED RECEIVER

1 RESOLVE

Finalized ledger
bundle

2 RETRIEVE

Named artifacts
Unwrap / decrypt

3 VERIFY

Hashes / round
Publisher key

Install the exact model — or reject

Blockchain identifies what is current. IPFS supplies bytes. The receiver checks both.


Three TEE tool calls, four log records



DFL

Agent / MCP / Inference / Log

Blockchain / IPFS

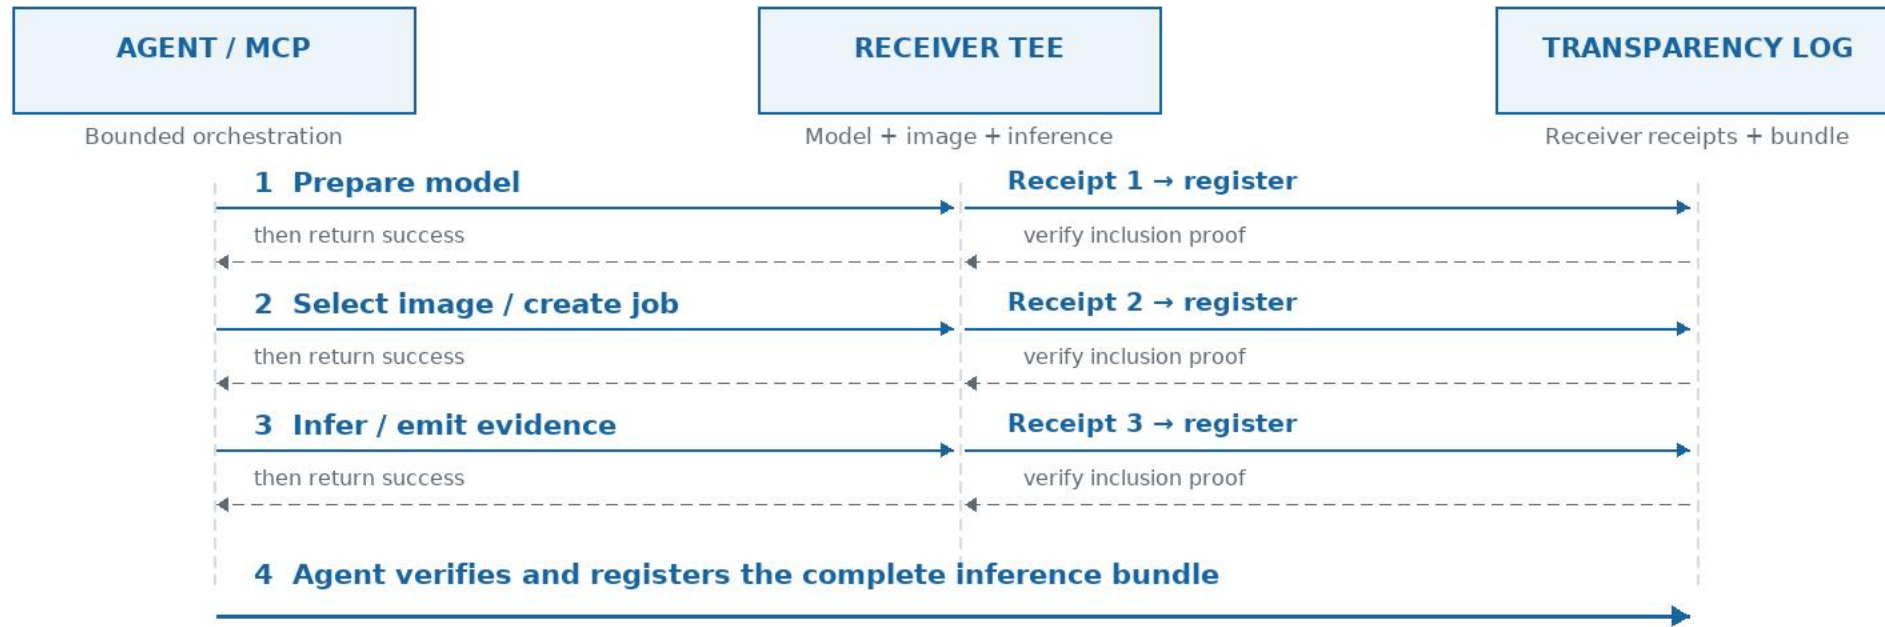

Receipt before success — for every receiver action in the Sello-enabled path.

What happens when a check fails?




DFL

Agent / MCP / Inference / Log

Blockchain / IPFS

Illustrative code paths · receipt publication shown with Sello enabled

01 AN ARTIFACT IS SUBSTITUTED

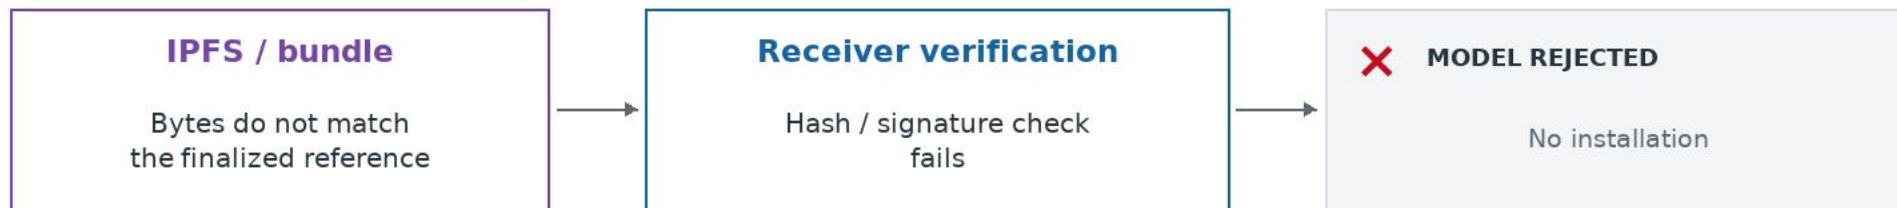

02 RECEIPT PUBLICATION FAILS



Visible rejection explains the mechanism; it does not demonstrate every threat is covered.

What does each piece of evidence establish?



DFL

Agent / MCP / Inference / Log

Blockchain / IPFS

EVIDENCE	QUESTION IT ANSWERS	BOUNDARY
DFL statements	Which accepted inputs and output are bound to this round?	Signed data can still be semantically harmful.
Finalized bundle	Which model reference and publisher are authoritative?	IPFS availability is a separate concern.
AIR + quote bindings	Which model, request, response and workload policy are linked?	The inference verifier lacks full DCAP collateral appraisal.
Tool + log receipts	Which action was signed by the receiver, and which statement was recorded?	The current log is a single-node virtual CCF service.

Technical provenance and bindings are evidence. Clinical utility needs its own evaluation.

Who aggregated in the actual 24-round run?



DFL

Agent / MCP / Inference / Log

Blockchain / IPFS

Six workers · one aggregator and five training contributors per round

	Federated round																								Total A
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
VM-0	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	A	T	A	T	T	2
VM-1	T	T	T	T	T	T	T	T	T	T	T	T	T	T	A	T	A	T	T	T	T	T	T	A	3
VM-2	A	A	T	T	T	T	T	T	T	T	T	A	T	T	T	T	T	T	T	T	T	T	A	T	4
VM-3	T	T	T	T	A	T	A	T	T	A	T	T	T	T	T	A	T	T	T	T	T	T	T	T	4
VM-4	T	T	A	A	T	A	T	A	A	T	A	T	A	A	T	T	T	T	A	T	T	T	T	T	9
VM-5	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	A	T	T	A	T	T	T	2

A Aggregation **T** Local training

24 rounds × 5 updates = 120 contributions

Role rotation is visible. One run does not establish long-run fairness or recovery behavior.

Hospitals want to keep control of patient data




DFL

Agent / MCP / Inference / Log

Blockchain / IPFS

Patient confidentiality · control over access · no central pool of raw records

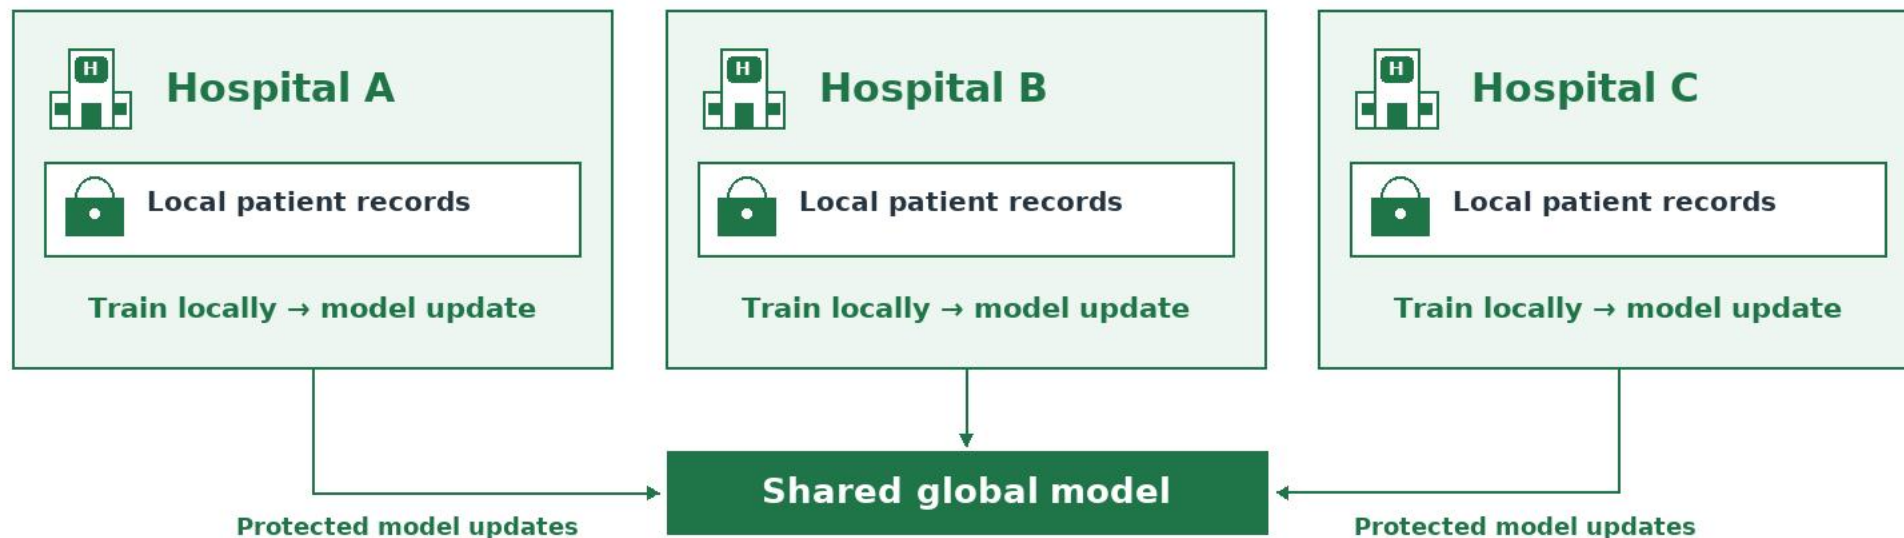

Train where the data is held. Collaborate through protected model exchange.