

jQuery Mobile Cheat Sheet

Páginas



Página simple	<pre><!DOCTYPE html> <html> <head> <meta charset="utf-8" /> <link rel="stylesheet" href="http://code.jquery.com/mobile/1.4.4/jquery.mobile-1.4.4.min.css" /> <script src="http://code.jquery.com/jquery-1.11.1.min.js"></script> <script src="http://code.jquery.com/mobile/1.4.4/jquery.mobile- 1.4.4.min.js"></script> <meta name="viewport" content="width=device-width, initial-scale=1, user- scalable=no"/> </head> <body> <!-- Página --> <div id = "page1" data-role="page"> <!-- Cabecera --> <div data-role="header"> <h1>Cabecera</h1> </div> <!-- Cuerpo --> <div role="main" class="ui-content"> <p>Cuerpo</p> </div> <!-- Pie --> <div data-role="footer"> <h1>Pie</h1> </div> </div> <!-- Fin página --> </body> </html></pre>
---------------	--

Multipágina	<pre> <!DOCTYPE html> <html> <head> <meta charset="utf-8" /> <link rel="stylesheet" href="http://code.jquery.com/mobile/1.4.4/jquery.mobile-1.4.4.min.css" /> <script src="http://code.jquery.com/jquery-1.11.1.min.js"></script> <script src="http://code.jquery.com/mobile/1.4.4/jquery.mobile- 1.4.4.min.js"></script> <meta name="viewport" content="width=device-width, initial-scale=1, user- scalable=no"/> </head> <body> <!-- Página --> <div id = "page1" data-role="page"> <!-- Cabecera --> <div data-role="header"> <h1>Cabecera Principal</h1> </div> <!-- Cuerpo --> <div role="main" class="ui-content"> <p>Cuerpo Principal</p> Detalle </div> <!-- Pie --> <div data-role="footer"> <h1>Pie Principal</h1> </div> </div> <!-- Fin página --> <!-- Página --> <div id = "page2" data-role="page"> <!-- Cabecera --> <div data-role="header"> Atrás <h1>Cabecera Detalle</h1> </div> <!-- Cuerpo --> <div role="main" class="ui-content"> <p>Cuerpo Detalle</p> </div> <!-- Pie --> <div data-role="footer"> <h1>Pie Detalle</h1> </div> </div> <!-- Fin página --> </body> </html> </pre>
Transición	<code>Ir a detalle</code>
Transiciones	Fade,pop, slip, turn, flow, slidefade, slide, slideup, slidedown, none

Temas	Hay tres temas: a Gris, b Negro y c iOS <pre><div data-role = "page" id = "temaA" data-theme = "a"> </div></pre>
Header/Footer fijo	<pre><div data-role="header" data-position="fixed"> <h1>Header fijo</h1> </div> <div data-role="footer" data-position="fixed"> <h4>Footer fijo</h4> </div></pre>



Botones

Botón	<pre>Mostrar detalle</pre>
Basic markup 	<pre>Anchor <button class="ui-btn">Button</button></pre>
Corners 	<pre>Anchor <button class="ui-btn ui-corner-all">Button</button></pre>
Inline 	<pre>Anchor <button class="ui-btn ui-btn-inline">Button</button></pre>
Mini 	<pre>Anchor <button class="ui-btn ui-mini">Button</button></pre>
Icons 	<pre>Anchor <button class="ui-btn ui-icon-delete ui-btn-icon- left">Button</button></pre>
Icon position 	<pre>Left Right Top Bottom Icon only</pre>

<p>Inline:</p> 	<pre> Left Right Top Bottom Icon only Disabled anchor via class <button disabled="">Button with disabled attribute</button> </pre>
<p>Disabled</p> 	<pre> Disabled anchor via class <button disabled="">Button with disabled attribute</button> </pre>







Popups

Cuadro de mensaje	<pre> Mostrar mensaje </pre>
<p>Popup basics</p> 	<pre> Basic Popup <div data-role="popup" id="popupBasic"> <p>This is a completely basic popup, no options set.</p> </div> </pre>
Popup avanzado	<pre> Popup avanzado <div data-role="popup" id="popupAvanzado" data- overlay-theme="b"> <p>Mensaje del popup avanzado</p> </div> </pre>
<p>Tooltip</p> 	<pre> <p> A paragraph with a tooltip. Learn more </p> <div data-role="popup" id="popupInfo" class="ui- content" data-theme="a" style="max-width: 350px;"> <p> Here is a tiny popup being used like a tooltip. The text will wrap to multiple lines as needed. </p> </div> </pre>

<h3>Menu</h3> <p>A menu can be created by adding a <code>listview</code> inside a popup.</p> <div>  </div>	<pre> Actions... <div data-role="popup" id="popupMenu" data- theme="b"> <ul data-role="listview" data-inset="true" style="min-width: 210px;"> <li data-role="list-divider">Choose an action View details Edit Disable Delete </div> </pre>
<h3>Form</h3> <p>You can place a form inside a popup. When it opens, focus will be restricted to elements inside the popup.</p> <div>  </div>	<pre> Sign in <div data-role="popup" id="popupLogin" data- theme="a" class="ui-corner-all"> <form> <div style="padding: 10px 20px;"> <h3>Please sign in</h3> <label for="un" class="ui- hidden-accessible">Username:</label> <input type="text" name="user" id="un" value="" placeholder="username" data-theme="a"> <label for="pw" class="ui-hidden- accessible">Password:</label> <input type="password" name="pass" id="pw" value="" placeholder="password" data-theme="a"> <button type="submit" class="ui-btn ui- corner-all ui-shadow ui-btn-b ui-btn-icon-left ui- icon-check">Sign in</button> </div> </form> </div> </pre>

NavBars

<div> <div>One</div> <div>Two</div> <div>Three</div> </div>	<pre> <div data-role="navbar"> One Two Three </div><!-- /navbar --> </pre>
---	---

 Summary  Favs  Setup	<pre> <div data-role="footer"> <div data-role="navbar"> Summary Favs Setup </div> <!-- /navbar --> </div> </pre>
 Summary  Favs  Setup	<pre> <div data-role="footer"> <div data-role="navbar" data-iconpos="left"> Summary Favs Setup </div> <!-- /navbar --> </div> </pre>

Listviews

<div>Acura</div> <div>Audi</div> <div>BMW</div> <div>Cadillac</div> <div>Ferrari</div>	<pre> <ul data-role="listview"> Acura Audi BMW Cadillac Ferrari </pre>
<div>1. Acura</div> <div>2. Audi</div> <div>3. BMW</div> <div>4. Cadillac</div> <div>5. Ferrari</div>	<pre> <ol data-role="listview"> Acura Audi BMW Cadillac Ferrari </pre>
<div>Linked</div> <div>List items with links are styled as button.</div> <div>Acura ></div> <div>Audi ></div> <div>BMW ></div> <div>Cadillac ></div> <div>Ferrari ></div>	<pre> <ul data-role="listview"> Acura Audi BMW Cadillac Ferrari </pre>

<h3>Inset</h3> <p>Adding the <code>data-inset="true"</code> attribute to the list (ul or ol), applies the inset appearance which is useful for mixing a listview with other content on a page.</p> <div> <div>Acura</div> <div>Audi</div> <div>BMW</div> <div>Cadillac</div> <div>Ferrari</div> </div>	<pre><ul data-role="listview" data-inset="true"> Acura Audi BMW Cadillac Ferrari </pre>
<h3>Filter</h3> <div> <input type="text" value="Search fruits..."/> <div> <div>Apple</div> <div>Banana</div> <div>Cherry</div> <div>Cranberry</div> <div>Grape</div> <div>Orange</div> </div> </div>	<pre><ul data-role="listview" data-filter="true" data-filter- placeholder="Search fruits..." data-inset="true"> Apple Banana Cherry Cranberry Grape Orange </pre>
<h3>Filter reveal</h3> <div> <input type="text" value="Search fruits..."/> </div>	<pre><form class="ui-filterable"> <input id="autocomplete-input" data-type="search" placeholder="Search fruits..."> </form> <ul data-role="listview" data-filter="true" data-filter- reveal="true" data-input="#autocomplete-input" data- inset="true"> Apple Banana Cherry Cranberry Grape Orange </pre>
<h3>List dividers</h3> <div> <div>Mail</div> <div>Inbox</div> <div>Outbox</div> <div>Contacts</div> <div>Friends</div> <div>Work</div> </div>	<pre><ul data-role="listview" data-inset="true" data-divider- theme="a"> <li data-role="list-divider">Mail Inbox Outbox <li data-role="list-divider">Contacts Friends Work </pre>

Autodividers

Filter items...

A

Adam Kinkaid

Alex Wickerham

Avery Johnson

B

Bob Cabot

C

Caleb Booth

Christopher Adams

Culver James

```
<ul data-role="listview" data-autodividers="true" data-filter="true" data-inset="true">
  <li><a href="index.html">Adam Kinkaid</a></li>
  <li><a href="index.html">Alex Wickerham</a></li>
  <li><a href="index.html">Avery Johnson</a></li>
  <li><a href="index.html">Bob Cabot</a></li>
  <li><a href="index.html">Caleb Booth</a></li>
  <li><a href="index.html">Christopher Adams</a></li>
  <li><a href="index.html">Culver James</a></li>
</ul>
```

Count bubbles

Inbox

12

Outbox

0

Drafts

4

Sent

328

Trash

62

```
<ul data-role="listview" data-count-theme="b" data-inset="true">
  <li><a href="#">Inbox <span class="ui-li-count">12</span></a></li>
  <li><a href="#">Outbox <span class="ui-li-count">0</span></a></li>
  <li><a href="#">Drafts <span class="ui-li-count">4</span></a></li>
  <li><a href="#">Sent <span class="ui-li-count">328</span></a></li>
  <li><a href="#">Trash <span class="ui-li-count">62</span></a></li>
</ul>
```

Icons: Standard

custom-icon

data-icon="delete"

data-icon="gear"

data-icon="info"

data-icon="false"

```
<ul data-role="listview" data-inset="true">
  <li data-icon="custom" id="skull"><a href="#">custom-icon</a></li>
  <li data-icon="delete"><a href="#">data-icon="delete"</a></li>
  <li data-icon="gear"><a href="#">data-icon="gear"</a></li>
  <li data-icon="info"><a href="#">data-icon="info"</a></li>
  <li data-icon="false"><a href="#">data-icon="false"</a></li>
</ul>
```

Icons: 16x16

France

Germany


Great Britain

Finland

United States


```
<ul data-role="listview" data-inset="true">
  <li><a href="#">France</a></li>
  <li><a href="#">Germany</a></li>
  <li><a href="#">Great Britain</a></li>
  <li><a href="#">Finland</a></li>
  <li><a href="#">United States</a></li>
</ul>
```


Thumbnails

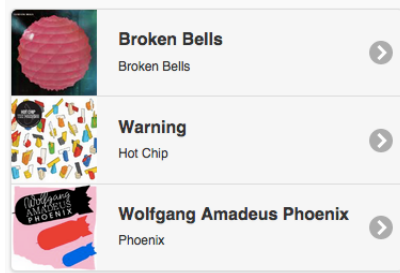

```
<ul data-role="listview" data-inset="true">
  <li><a href="#">
    
    <h2>Broken Bells</h2>
    <p>Broken Bells</p></a>
  </li>
  <li><a href="#">
    
    <h2>Warning</h2>
    <p>Hot Chip</p></a>
  </li>
  <li><a href="#">
    
    <h2>Wolfgang Amadeus Phoenix</h2>
    <p>Phoenix</p></a>
  </li>
</ul>
```

Formatted content

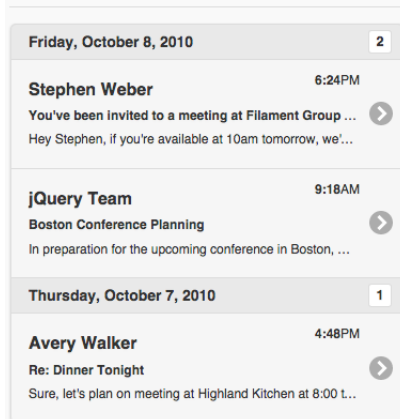

```
<ul data-role="listview" data-inset="true">
  <li data-role="list-divider">Friday, October 8, 2010
  <span class="ui-li-count">2</span></li>
  <li><a href="index.html">
    <h2>Stephen Weber</h2>
    <p><strong>You've been invited to a meeting at Filament Group in Boston, MA</strong></p>
    <p>Hey Stephen, if you're available at 10am tomorrow, we've got a meeting with the jQuery team.</p>
    <p class="ui-li-aside"><strong>6:24</strong>PM</p>
  </li>
  <li><a href="index.html">
    <h2>jQuery Team</h2>
    <p><strong>Boston Conference Planning</strong></p>
    <p>In preparation for the upcoming conference in Boston, we need to start gathering a list of sponsors and speakers.</p>
    <p class="ui-li-aside"><strong>9:18</strong>AM</p>
  </li>
  <li data-role="list-divider">Thursday, October 7, 2010
  <span class="ui-li-count">1</span></li>
  <li><a href="index.html">
    <h2>Avery Walker</h2>
    <p><strong>Re: Dinner Tonight</strong></p>
    <p>Sure, let's plan on meeting at Highland Kitchen at 8:00 tonight. Can't wait!</p>
    <p class="ui-li-aside"><strong>4:48</strong>PM</p>
  </li>
</ul>
```

Listas colapsables

<div><div><div><div><div><div></div><div>Pets</div></div></div><div><div>Canary</div><div></div></div><div><div>Cat</div><div></div></div><div><div>Dog</div><div></div></div><div><div>Gerbil</div><div></div></div><div><div>Iguana</div><div></div></div><div><div>Mouse</div><div></div></div></div><div><div><div></div><div>Farm animals</div></div><div><div>Chicken</div><div></div></div><div><div>Cow</div><div></div></div><div><div>Duck</div><div></div></div><div><div>Horse</div><div></div></div><div><div>Pig</div><div></div></div><div><div>Sheep</div><div></div></div></div><div><div><div></div><div>Wild Animals</div></div></div></div></div>	<pre><div data-role="collapsible" data-inset="false"> <h3>Pets</h3> <ul data-role="listview"> Canary Cat Dog Gerbil Iguana Mouse </div> <!-- /collapsible --> <div data-role="collapsible" data-inset="false"> <h3>Farm animals</h3> <ul data-role="listview"> Chicken Cow Duck Horse Pig Sheep </div> <!-- /collapsible --> <div data-role="collapsible" data-inset="false"> <h3>Wild Animals</h3> <ul data-role="listview"> Aardvark Alligator Ant Bear Beaver Cougar Dingo </div> <!-- /collapsible --></pre>
<div><div><div><div><div><div></div><div>Section 1</div></div></div><div><div></div><div>Section 2</div></div><div><div>I'm the collapsible content for section 2</div></div><div><div></div><div>Section 3</div></div></div></div></div>	<pre><div data-role="collapsibleset" data-theme="a" data- content-theme="a"> <div data-role="collapsible"> <h3>Section 1</h3> <p>I'm the collapsible content for section 1</p> </div> <div data-role="collapsible"> <h3>Section 2</h3> <p>I'm the collapsible content for section 2</p> </div> <div data-role="collapsible"> <h3>Section 3</h3> <p>I'm the collapsible content for section 3</p> </div> </div></pre>

Tablas

<div>Columns to display...</div> <table> <thead> <tr> <th>Movie Title</th> <th>Rating</th> </tr> </thead> <tbody> <tr><td>Citizen Kane</td><td>100%</td></tr> <tr><td>Casablanca</td><td>97%</td></tr> <tr><td>The Godfather</td><td>97%</td></tr> <tr><td>Gone with the Wind</td><td>96%</td></tr> <tr><td>Lawrence of Arabia</td><td>94%</td></tr> <tr><td>Dr. Strangelove Or How I Learned to Stop Worrying and Love the Bomb</td><td>92%</td></tr> <tr><td>The Graduate</td><td>91%</td></tr> <tr><td>The Wizard of Oz</td><td>90%</td></tr> <tr><td>Singin' in the Rain</td><td>89%</td></tr> <tr><td>Inception</td><td>84%</td></tr> </tbody> </table>	Movie Title	Rating	Citizen Kane	100%	Casablanca	97%	The Godfather	97%	Gone with the Wind	96%	Lawrence of Arabia	94%	Dr. Strangelove Or How I Learned to Stop Worrying and Love the Bomb	92%	The Graduate	91%	The Wizard of Oz	90%	Singin' in the Rain	89%	Inception	84%	<pre> <table data-role="table" id="table-custom-2" data- mode="columntoggle" class="ui-body-d ui-shadow table-stripe ui- responsive" data-column-btn-theme="b" data-column-btn- text="Columns to display..." data-column-popup-theme="a"> <thead> <tr class="ui-bar-d"> <th data- priority="2">Rank</th> <th>Movie Title</th> <th data- priority="3">Year</th> <th data-priority="1"><abbr title="Rotten Tomato Rating">Rating</abbr></th> <th data- priority="5">Reviews</th> </tr> </thead> <tbody> <tr> <th>1</th> <td>Citizen Kane</td> <td>1941</td> <td>100%</td> <td>74</td> </tr> </tbody> </table> </pre>
Movie Title	Rating																						
Citizen Kane	100%																						
Casablanca	97%																						
The Godfather	97%																						
Gone with the Wind	96%																						
Lawrence of Arabia	94%																						
Dr. Strangelove Or How I Learned to Stop Worrying and Love the Bomb	92%																						
The Graduate	91%																						
The Wizard of Oz	90%																						
Singin' in the Rain	89%																						
Inception	84%																						

Formularios

Text Input: <input type="text"/>	<label for="textinput-2">Text Input:</label> <input type="text" name="textinput-2" id="textinput-2" placeholder="Text input" value="">
Search Input: <input type="search"/>	<label for="search-2">Search Input:</label> <input type="search" name="search-2" id="search-2" value="">
Textarea: <input type="text"/>	<label for="textarea-2">Textarea:</label> <textarea cols="40" rows="8" name="textarea-2" id="textarea-2">Textarea</textarea>
Slider: <input type="range"/>	<label for="slider-2">Slider:</label> <input type="range" name="slider-2" id="slider-2" value="50" min="0" max="100" data-highlight="true">
Rangeslider: <input type="range"/>	<div data-role="rangeslider"> <label for="range-1a">Rangeslider:</label> <input type="range" name="range-1a" id="range-1a" min="0" max="100" value="40"> <label for="range-1b">Rangeslider:</label> <input type="range" name="range-1b" id="range-1b" min="0" max="100" value="80"> </div>

<div>Flip toggle:</div> <div> <input type="checkbox"/> Off </div>	<pre> <label for="flip-2">Flip toggle:</label> <select name="flip-2" id="flip-2" data- role="slider"> <option value="off">Off</option> <option value="on">On</option> </select> </pre>
<div>Vertical controlgroup, checkbox:</div> <div> <input type="checkbox"/> One <input type="checkbox"/> Two <input type="checkbox"/> Three </div>	<pre> <fieldset data-role="controlgroup"> <legend>Vertical controlgroup, checkbox:</legend> <input type="checkbox" name="checkbox-v-2a" id="checkbox-v-2a"> <label for="checkbox-v-2a">One</label> <input type="checkbox" name="checkbox-v-2b" id="checkbox-v-2b"> <label for="checkbox-v-2b">Two</label> <input type="checkbox" name="checkbox-v-2c" id="checkbox-v-2c"> <label for="checkbox-v-2c">Three</label> </fieldset> </pre>
<div>Vertical controlgroup, radio:</div> <div> <input checked="" type="radio"/> One <input type="radio"/> Two <input type="radio"/> Three </div>	<pre> <fieldset data-role="controlgroup"> <legend>Vertical controlgroup, radio:</legend> <input type="radio" name="radio-choice-v-2" id="radio-choice-v-2a" value="on" checked="checked"> <label for="radio-choice-v-2a">One</label> <input type="radio" name="radio-choice-v-2" id="radio-choice-v-2b" value="off"> <label for="radio-choice-v-2b">Two</label> <input type="radio" name="radio-choice-v-2" id="radio-choice-v-2c" value="other"> <label for="radio-choice-v-2c">Three</label> </fieldset> </pre>
<div>Horizontal controlgroup, checkbox:</div> <div> <input type="checkbox"/> One <input type="checkbox"/> Two <input type="checkbox"/> Three </div>	<pre> <fieldset data-role="controlgroup" data- type="horizontal"> <legend>Horizontal controlgroup, checkbox:</legend> <input type="checkbox" name="checkbox-h-2a" id="checkbox-h-2a"> <label for="checkbox-h-2a">One</label> <input type="checkbox" name="checkbox-h-2b" id="checkbox-h-2b"> <label for="checkbox-h-2b">Two</label> <input type="checkbox" name="checkbox-h-2c" id="checkbox-h-2c"> <label for="checkbox-h-2c">Three</label> </fieldset> </pre>
<div>Horizontal controlgroup, radio:</div> <div> <input checked="" type="radio"/> One <input type="radio"/> Two <input type="radio"/> Three </div>	<pre> <fieldset data-role="controlgroup" data- type="horizontal"> <legend>Horizontal controlgroup, radio:</legend> <input type="radio" name="radio-choice-h-2" id="radio-choice-h-2a" value="on" checked="checked"> <label for="radio-choice-h-2a">One</label> <input type="radio" name="radio-choice-h-2" id="radio-choice-h-2b" value="off"> <label for="radio-choice-h-2b">Two</label> <input type="radio" name="radio-choice-h-2" id="radio-choice-h-2c" value="other"> <label for="radio-choice-h-2c">Three</label> </fieldset> </pre>
<div>Send:</div> <div> <input type="button" value="Submit"/> </div>	<pre> <label for="submit-2">Send:</label> <button class="ui-shadow ui-btn ui-corner-all" type="submit" id="submit-2">Submit</button> </pre>

Popup Datepicker

September 2014

Su	Mo	Tu	We	Th	Fr	Sa
	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30				

```
<input type="text" data-role="date">
```

Inline Datepicker

09/28/2014

September 2014

Su	Mo	Tu	We	Th	Fr	Sa
	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30				

```
<input type="text" data-role="date" data-inline="true">
```