

Endpoint de categoria

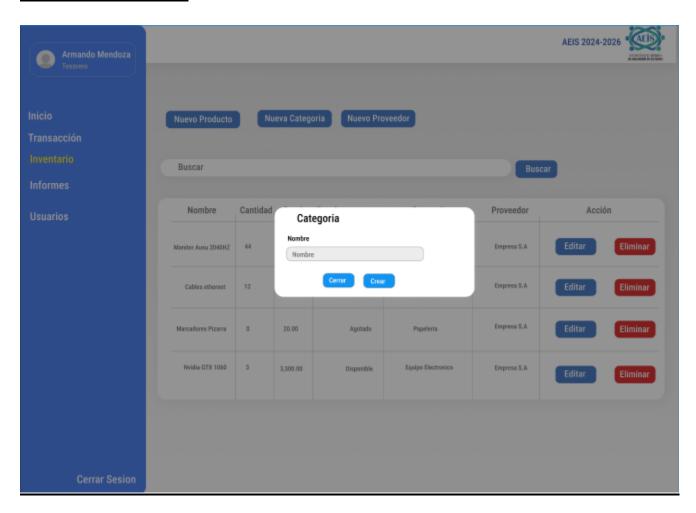


Endpoint	localhost/api/categoria		
HTTP Method	POST		
Header	Bearer jwt		
	{ "nombre":""		
Payload	}		

Endpoint de Proveedor

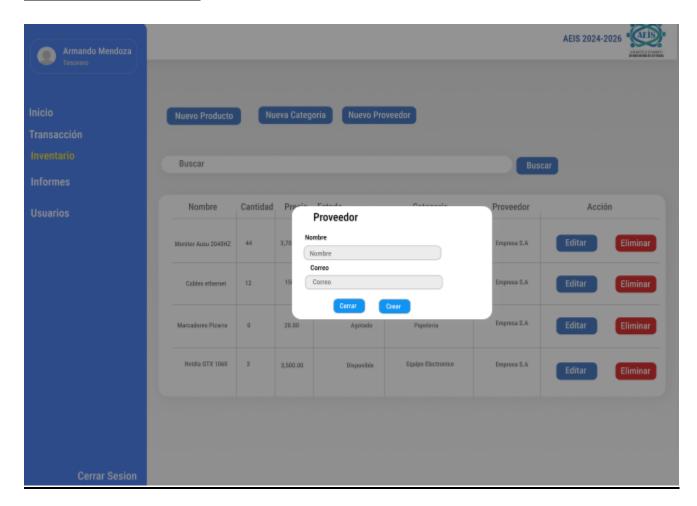

Endpoint	localhost/api/proveedor		
HTTP Method	POST		
Header	Bearer jwt		
	{ "nombre":"", "correo":""		
Payload	}		


Endpoint de Inventario

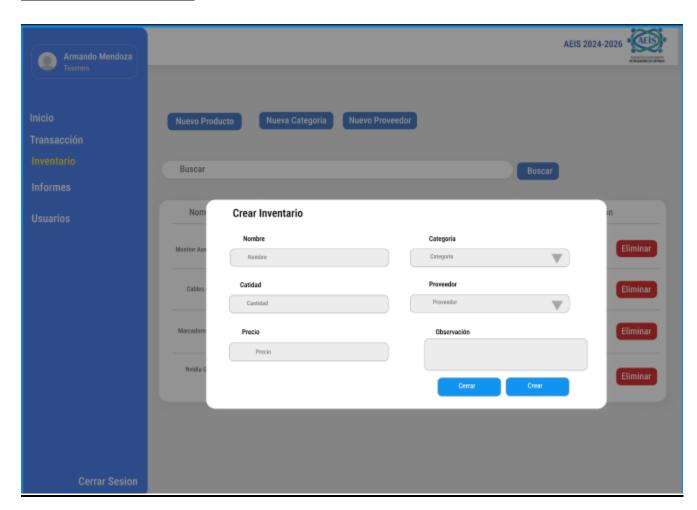


Endpoint	localhost/api/inventario			
HTTP Method	POST			
Header	Bearer jwt			
Davidad	{ "asociacion_id":##, "nombre":"", "cantidad":##, "proveedor_id":##, "categoria_id":##, "precio":##, "obsevacion":""			
Payload	}			

Endpoint	localhost/api/categoria			
HTTP Method	GET			
Header	Bearer jwt			
Payload				


Endpoint	localhost/api/proveedor			
HTTP Method	GET			
Header	Bearer jwt			
Payload				

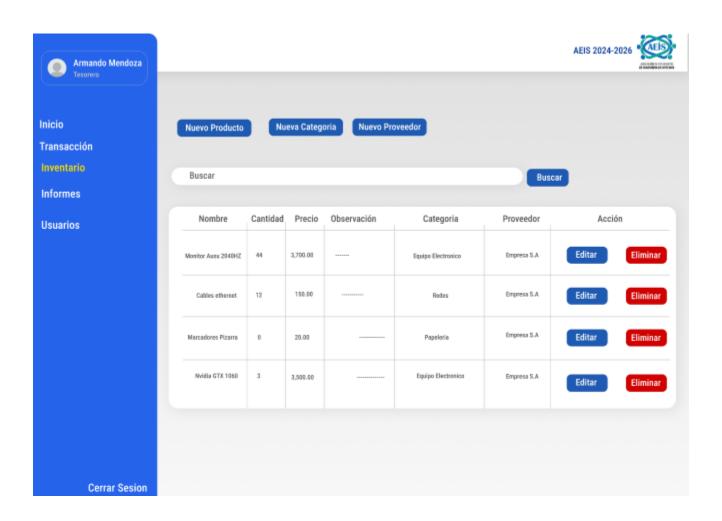

Endpoint	localhost/api/inventario			
HTTP Method	GET			
Header	Bearer jwt			
Payload				

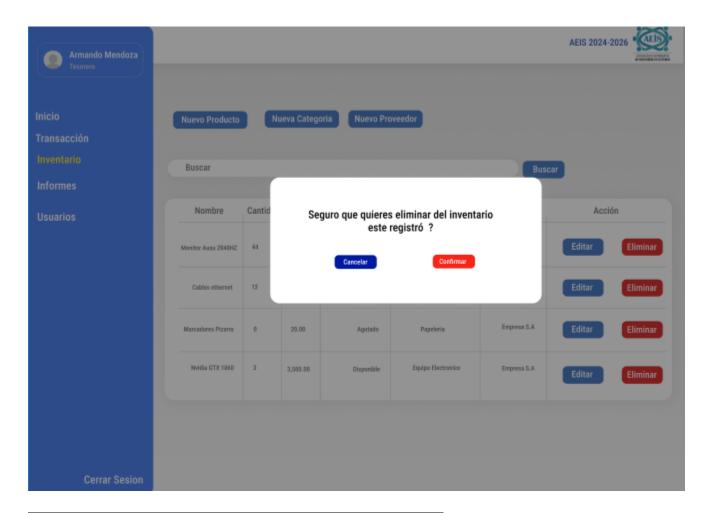


Endpoint	localhost/api/inventario/{inventario_id}			
HTTP Method	DELETE			
Header	Bearer jwt			
Payload				

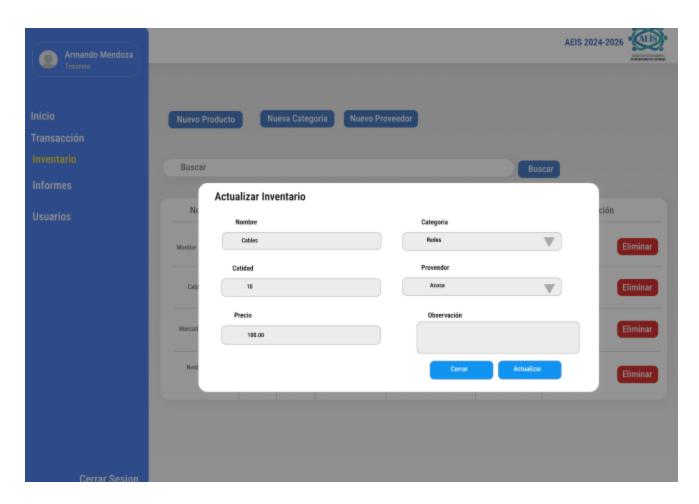

Endpoint	localhost/api/inventario/{inventario_id}		
HTTP Method	PUT		
Header	Bearer jwt		
Payload	{ estatus:"completado" }		

Endpoint de Movimientos

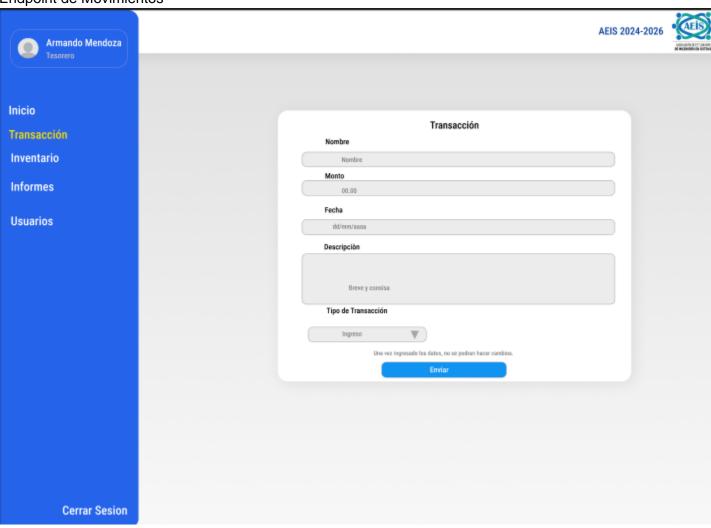

Endpoint	localhost/api/movimientos		
HTTP Method	POST		
Header	Bearer jwt		
Payload	{ "nombre":"", "monto":##, "fecha":"", "descripcion":"", "tipo_registro_id":##, }		

