


## Seteo de clave secreta


Para poder realizar la generación de un token de acceso a la API de una instalación de OJS es necesario tener una clave secreta de generación de tokens. Esta clave es totalmente confidencial y es responsabilidad del administrador el compartir esta clave con las personas adecuadas.

Para poder colocar esta clave dentro de la instalación es necesario editar el archivo de configuración de la instalación, esta configuración solo es necesario realizarla una única vez.

Inicialmente debemos colocarlos dentro del directorio donde se ha desempquetado todo el software de OJS, donde encontraremos el archivo *config.inc.php*, el cual es el archivo a editar:

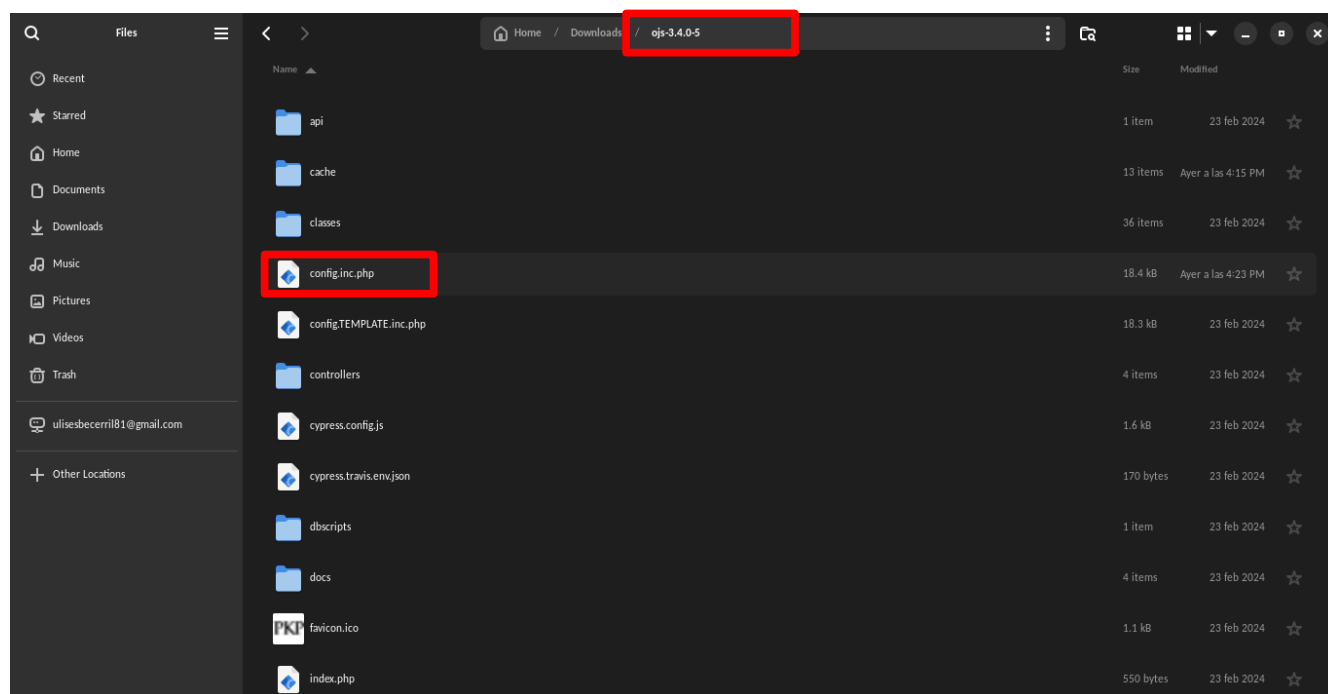


Debemos editarlo con cualquier editor de texto, y en la línea 280 encontraremos lo siguiente:

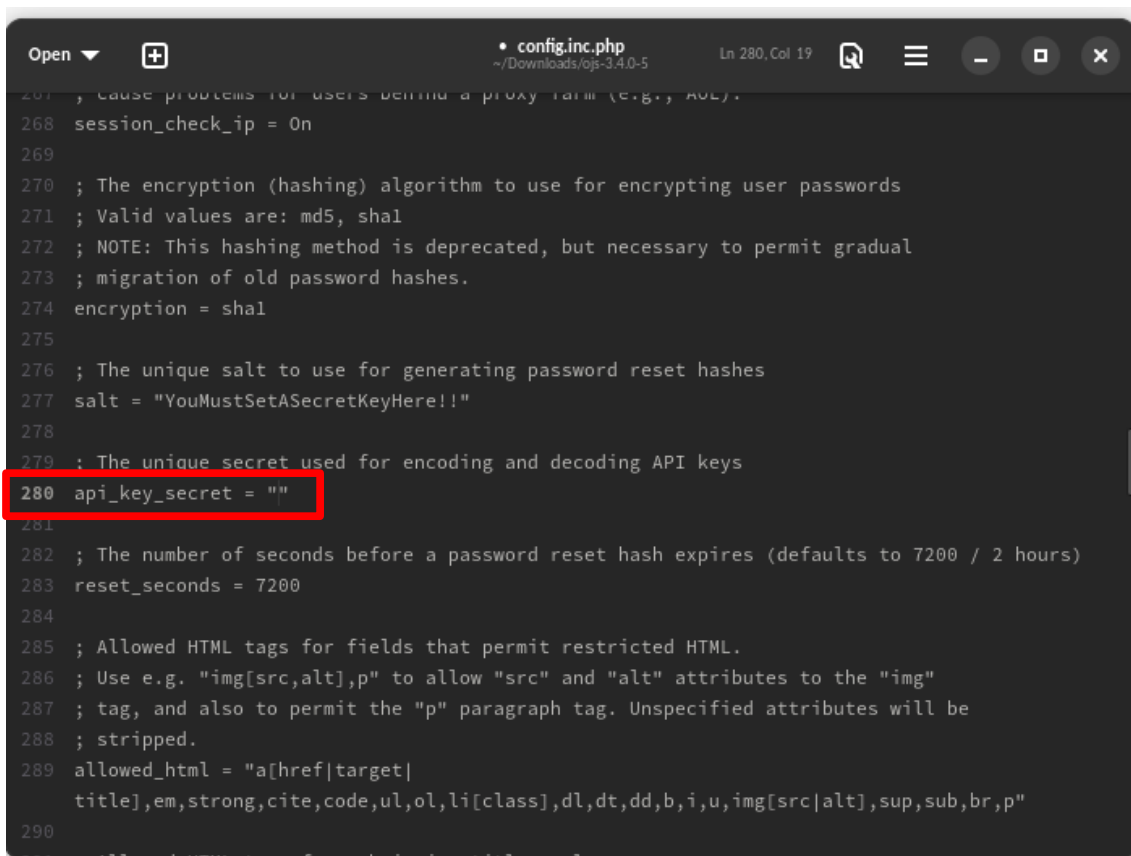

```
267 ; Cause problems for users behind a proxy farm (e.g., AOL).
268 session_check_ip = On
269
270 ; The encryption (hashing) algorithm to use for encrypting user passwords
271 ; Valid values are: md5, sha1
272 ; NOTE: This hashing method is deprecated, but necessary to permit gradual
273 ; migration of old password hashes.
274 encryption = sha1
275
276 ; The unique salt to use for generating password reset hashes
277 salt = "YouMustSetASecretKeyHere!!"
278
279 ; The unique secret used for encoding and decoding API keys
280 api_key_secret = ""
281
282 ; The number of seconds before a password reset hash expires (defaults to 7200 / 2 hours)
283 reset_seconds = 7200
284
285 ; Allowed HTML tags for fields that permit restricted HTML.
286 ; Use e.g. "img[src,alt],p" to allow "src" and "alt" attributes to the "img"
287 ; tag, and also to permit the "p" paragraph tag. Unspecified attributes will be
288 ; stripped.
289 allowed_html = "a[href|target|
    title],em,strong,cite,code,ul,ol,li[class],dl,dt,dd,b,i,u,img[src|alt],sup,sub,br,p"
290
291 ; ... and HTML tags for which we strip attributes
```

Vemos que no existe ninguna clave, por lo que debemos colocar una clave cualquiera encerrada por comillas dobles, esta clave es la que se utilizará para la generación de tokens en un futuro.

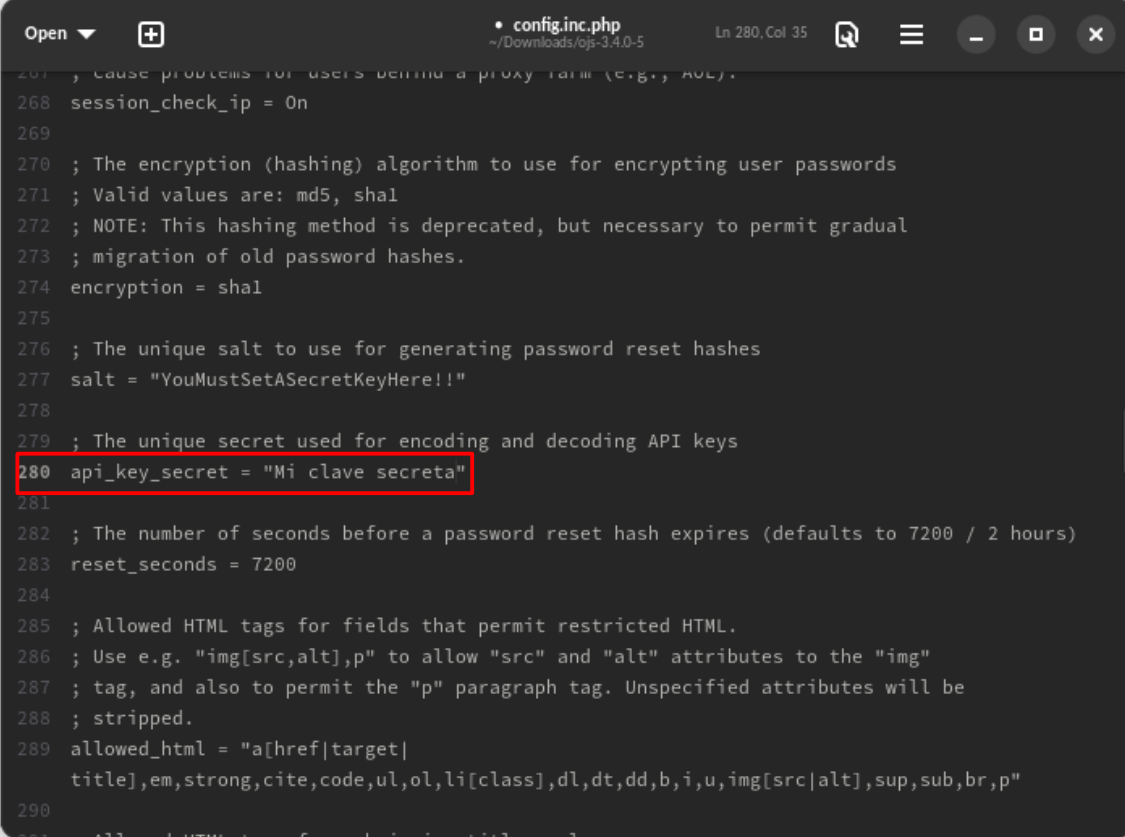

```
267 ; Cause problems for users behind a proxy farm (e.g., AOL).
268 session_check_ip = On
269
270 ; The encryption (hashing) algorithm to use for encrypting user passwords
271 ; Valid values are: md5, sha1
272 ; NOTE: This hashing method is deprecated, but necessary to permit gradual
273 ; migration of old password hashes.
274 encryption = sha1
275
276 ; The unique salt to use for generating password reset hashes
277 salt = "YouMustSetASecretKeyHere!!"
278
279 ; The unique secret used for encoding and decoding API keys
280 api_key_secret = "Mi clave secreta"
281
282 ; The number of seconds before a password reset hash expires (defaults to 7200 / 2 hours)
283 reset_seconds = 7200
284
285 ; Allowed HTML tags for fields that permit restricted HTML.
286 ; Use e.g. "img[src,alt],p" to allow "src" and "alt" attributes to the "img"
287 ; tag, and also to permit the "p" paragraph tag. Unspecified attributes will be
288 ; stripped.
289 allowed_html = "a[href|target|
title],em,strong,cite,code,ul,ol,li[class],dl,dt,dd,b,i,u,img[src|alt],sup,sub,br,p"
290
291 ; Allowed HTML tags for submission titles only
```

Una vez que esta clave ha sido establecida es necesario guardar el archivo en cuestión además de reiniciar el servicio de OJS y ya tendremos lista nuestra instalación para generar tokens de acceso.

Para obtener un token es necesario dirigirse al portal de OJS en el navegador perteneciente a tu revista e iniciar sesión con tus credenciales.

Home / Login

Username  
admin

Password  
••••••••

[Forgot your password?](#)

☒ Keep me logged in

Login

Current Issue

Developed By  
Open Journal Systems

Language

English  
Français (Canada)  
Español (España)  
Português (Brasil)  
עברית  
العربية

Una vez has entrado al portal del lado superior derecho dar clic en el icono del perfil y seleccionar la opción de Editar “Perfil”.

OJS3 Testdrive Journal

Submissions

My Queue Unassigned 3 All Active 13 Archives 8

My Assigned

No submissions found.

Change Language

English  
Français (Canada)  
Español (España)  
Português (Brasil)  
עברית  
العربية

Edit Profile

Logout

Ya en el apartado del perfil, dentro de las opciones que hay para personalizar, hacer clic en “API Key”, marcar las 2 casillas que aparecen “Enable external applications....” y, “Generate new API Key”, después dar clic en el botón “Guardar” en la parte inferior. Con esto ya estaría generado el token, para acceder a la API de tu revista.

The screenshot shows the 'OJS3 Testdrive Journal' user interface. On the left is a sidebar menu with categories: Submissions, Issues, Announcements, Payments, Settings, and Statistics. The 'Settings' section is expanded, showing options like Journal, Website, Workflow, Distribution, Users & Roles, Articles, Editorial Activity, Users, Reports, and Tools. The main content area is titled 'Profile' and has several tabs: Identity, Contact, Roles, Public, Password, Notifications, and API Key (which is highlighted with a red box). Below the tabs, there are two checked checkboxes, also highlighted with a red box: 'Enable external applications with the API key to access this account.' and 'Generate new API key'. A warning message states: 'Generating a new API key will invalidate any existing key for this user.' Below this, a text box displays a long alphanumeric string: 'eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.LmEyOTg5NzAwMzUyMGY3NTk'. This string is labeled 'API Key'. At the bottom of the form, there is a 'Save' button highlighted with a red box. A 'Help' link is visible in the top right corner of the settings area.