

ECE 220 Computer Systems & Programming

Lecture 21 – Trees: traversal and search



Tree Data Structure

Array, linked list, stack, queue – linear data structures

Tree: A data structure that captures hierarchical nature of relations between data elements using a set of linked nodes. Nodes are connected by edges. It's a **nonlinear** data structure.

Tree Terminology:


root, internal node, external node (leaf),
parent, child, sibling, height, depth

The **depth** of a node is the number of edges from the node to the tree's root node.

A root node will have a depth of 0.

The **height** of a node is the number of edges on the *longest path* from the node to a leaf.

A leaf node will have a height of 0.

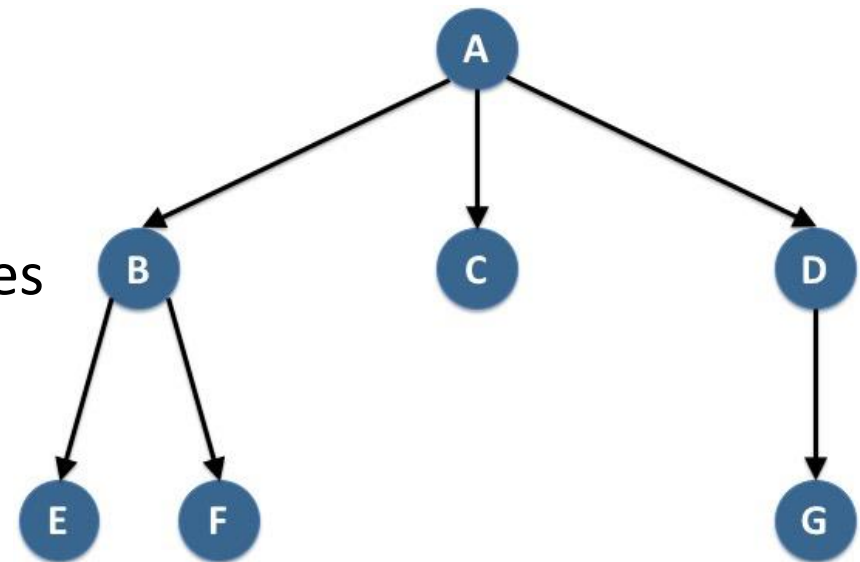

Common Operations on Tree:

- Locate an item
- Add a new item at a particular place
- Delete an item
- Remove a section of a tree (pruning)
- Add a new section to a tree (grafting)

Manually Creating a simple tree:

```
typedef struct nodeTag
{
    int data;
    struct nodeTag* left;
    struct nodeTag* right;
} t_node;

int main()
{
    /* manually create a simple tree */
    t_node *tree = NULL;
    tree = NewNode(10);
    tree->left = NewNode(5);
    tree->right = NewNode(-2);
    tree->left->left = NewNode(23);

    TraverseTree(tree);
    FreeTree(tree);
}
```

```
t_node* NewNode(int data)
```

```
{
```

```
    t_node* node;
```

```
    if ((node = (t_node *)malloc(sizeof(t_node))) != NULL)
```

```
    {
```

```
        node->data = data;
```

```
        node->left = NULL;
```

```
        node->right = NULL;
```

```
    }
```

```
    return node;
```

```
}
```

```
void TraverseTree(t_node *node)
```

```
{
```

```
    if (node != NULL)
```

```
    {
```

```
        printf("Node %d (address %p, left %p, right %p)\n",  
               node->data, node, node->left, node->right);
```

```
        TraverseTree(node->left);
```

```
        TraverseTree(node->right);
```

```
    }
```

```
}
```

```

void FreeTree(t_node *node)
{
    if (node != NULL)
    {
        FreeTree(node->left);
        FreeTree(node->right);
        free(node);
    }
}

```

```

[ubhowmik@linux-a2 SourceCode]$ ./tree_basics
Node 10 (address 0x1476010, left 0x1476030, right 0x1476050)
Node 5 (address 0x1476030, left 0x1476070, right (nil))
Node 23 (address 0x1476070, left (nil), right (nil))
Node -2 (address 0x1476050, left (nil), right (nil))

```

Binary Tree


- Each node has at most 2 children – left child and right child

What is the height of the tree?

What is the depth of node E?

What is the height of node E?

Which nodes are leaves?

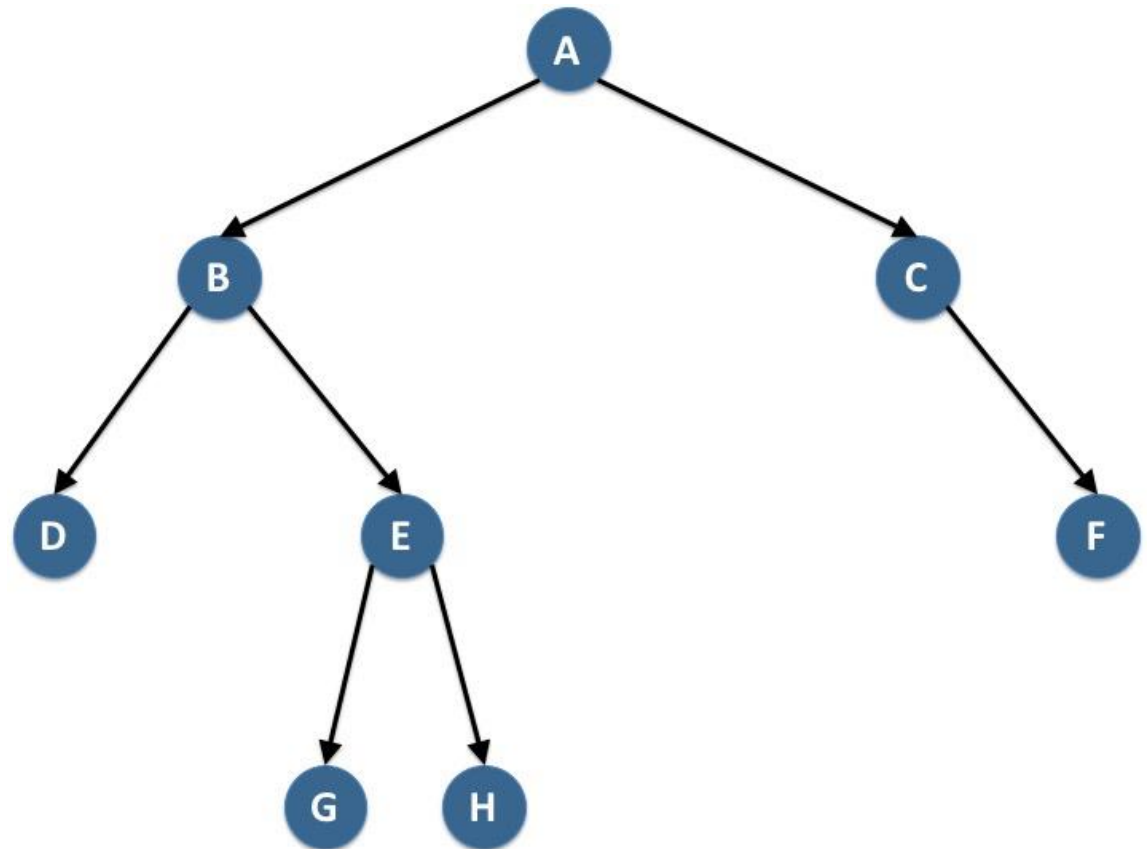

Binary Search Tree

- Data of nodes on the **left subtree** is **smaller** than the data of parent node
- Data of nodes on the **right subtree** is **larger** than the data of parent node
- Both left and right subtrees must also be BST
- Data in each node is unique


What is the sequence of access for

1. pre-order traversal?

2. in-order traversal?

3. post-order traversal?

<http://visualgo.net/bst.html>

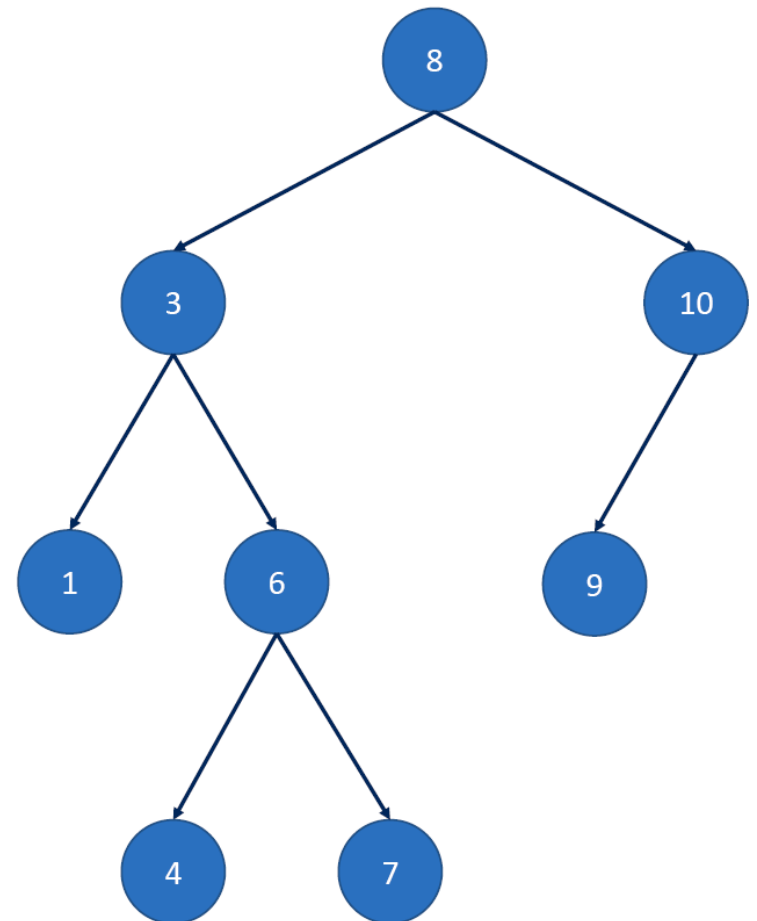

Insert a new node in the right place (BST)

```
t_node* InsertNode(t_node *node, int data)
{
    printf("Call InsertNode-- node addree:%p, data:%d\n", node, data);
    //base case : Found a right place to insert the node.
    if(node ==NULL){
        node = NewNode(data);
        return node;
    }
    // recursive case: Traverse either to the left (new data is smaller)
    // or the right (new data is larger)
    else{
        if(data < node->data)
            node->left = InsertNode(node->left , data);
        else
            node->right = InsertNode(node->right , data);
        return node;
    }
}
```

Search for a Node in BST

```
t_node* BSTSearch(t_node *node, int key)
{
    // base case
    // 1. no match
    if(node == NULL)
        return NULL;
    // 2. yes match
    if(node->data == key) {
        printf("Found the key %d\n", key);
        return node;
    }
    // recursive case: traverse either to the left
    //or the right
    if(key < node->data)
        return BSTSearch(node->left, key);
    else
        return BSTSearch(node->right, key);
}
```

Finding Minimum and Maximum:

```
t_node* FindMin(t_node *node)
{
    //base case
    if(node->left == NULL)
        return node;
    //recursive case
    else
        return FindMin(node->left);
}

t_node* FindMax(t_node *node)
{
    //base case
    if(node->right == NULL)
        return node;
    //recursive case
    else
        return FindMax(node->right);
}
```

Traverse a BST (preOrder)

```
/* Pre-order
   Display the data part of the current node
   Traverse the left subtree by recursively calling the pre-order function
   Traverse the right subtree by recursively calling the pre-order function
*/
void preOrderTraversal(t_node *node)
{
    if (node != NULL)
    {
        printf("Node %d (address %p, left %p, right %p)\n",
               node->data, node, node->left, node->right);
        preOrderTraversal(node->left);
        preOrderTraversal(node->right);
    }
}
```

Traverse a BST (inOrder)

```
void inOrderTraversal(t_node *node)
{
    if (node != NULL)
    {
        inOrderTraversal(node->left);
        printf("Node %d (address %p, left %p, right %p)\n",
               node->data, node, node->left, node->right);
        inOrderTraversal(node->right);
    }
}
```

Traverse a BST (postorder)

```
void postOrderTraversal(t_node *node)
{
    if (node != NULL)
    {
        postOrderTraversal(node->left);
        postOrderTraversal(node->right);
        printf("Node %d (address %p, left %p, right %p)\n",
               node->data, node, node->left, node->right);
    }
}
```

FreeTree:

```
void FreeTree(t_node *node)
{
    // Base case
    if (node == NULL)
        return;
    // Recursive case
    else{
        FreeTree (node->left) ;
        FreeTree (node->right) ;
        printf("Free node of %d\n ", node->data) ;
        free (node) ;
    }
}
```

Height of BST

```
int getHeight(t_node *node)
{
    int lh, rh;
    //base
    if(node == NULL)
        return -1;
    //recursive
    else{
        lh = getHeight(node->left);
        rh = getHeight(node->right);
        if(lh>rh)
            return lh + 1;
        else
            return rh + 1;
    }
}
```