



Curso Online de MySQL para DBAs

Aula 2 – Instalar MySQL no Windows André Bechara






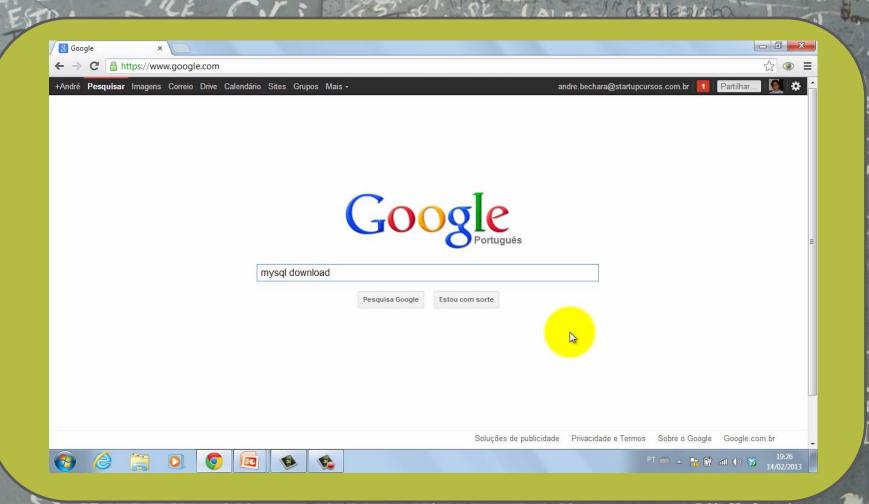


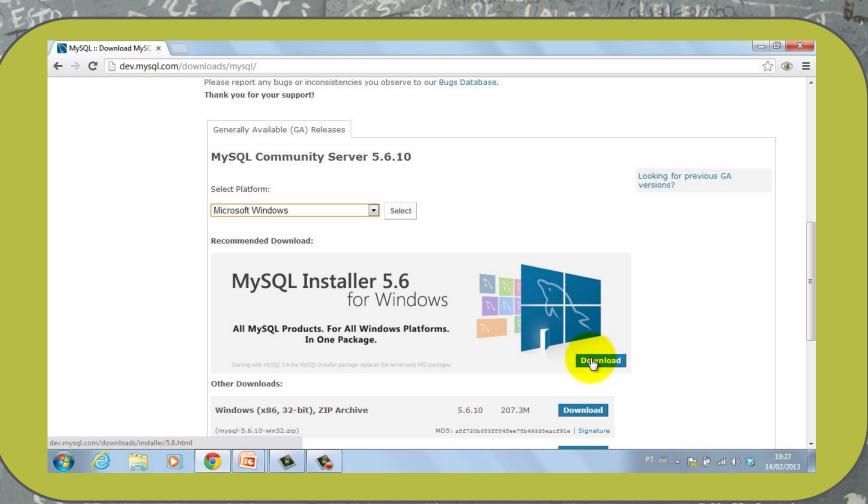




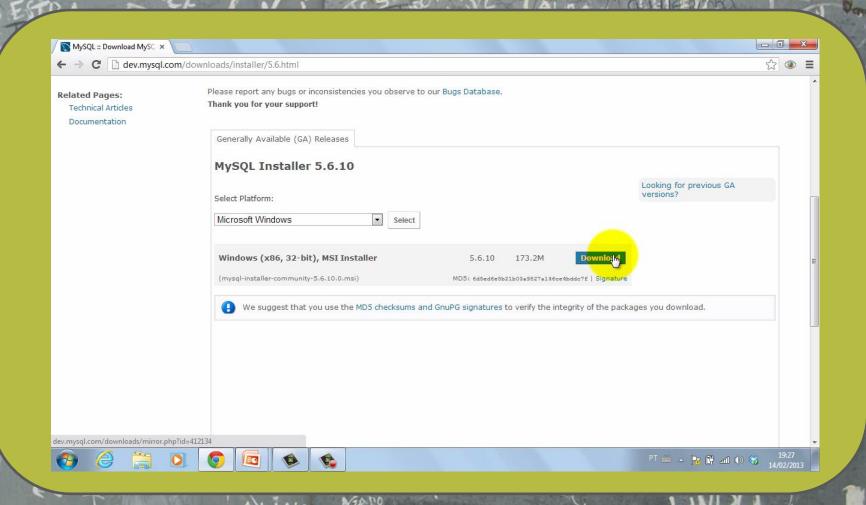




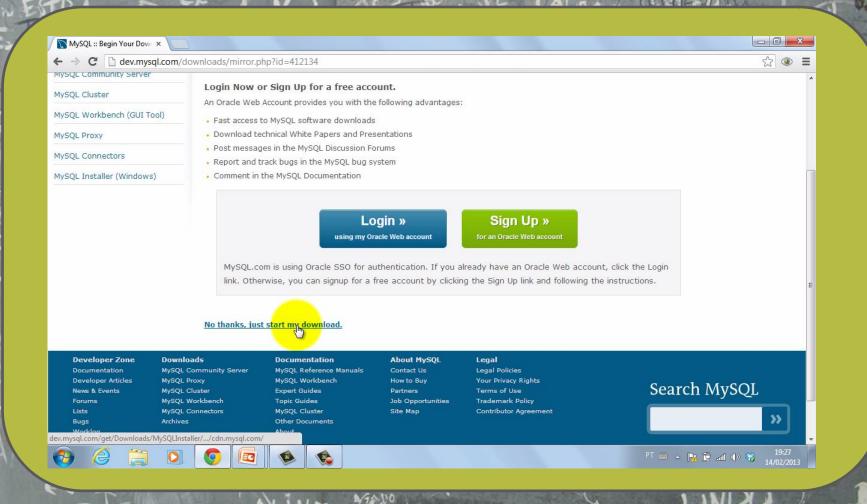




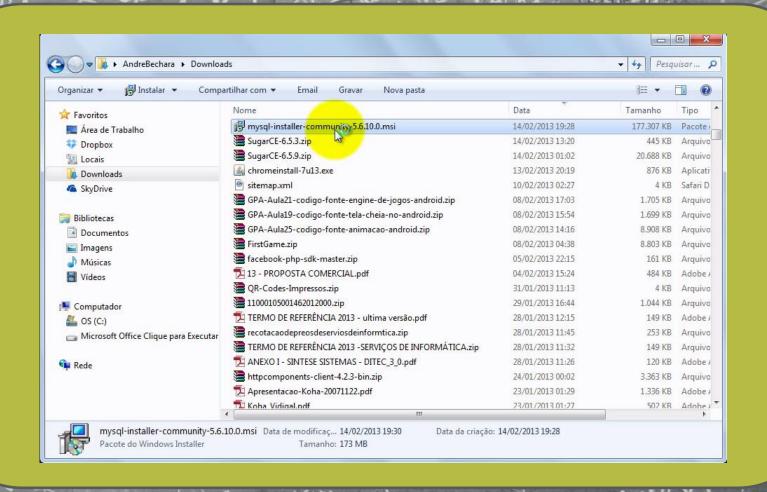




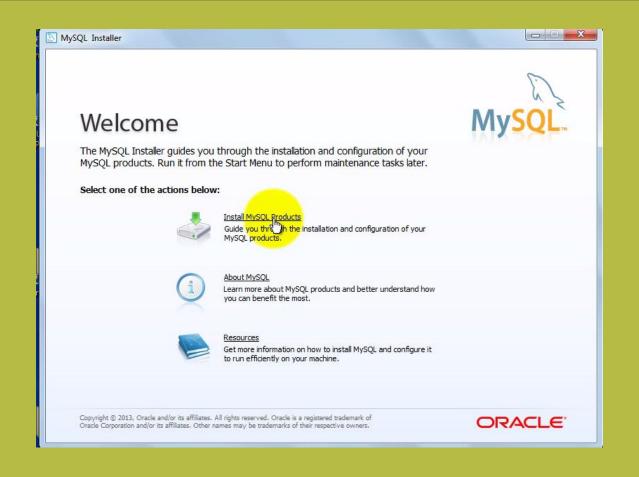




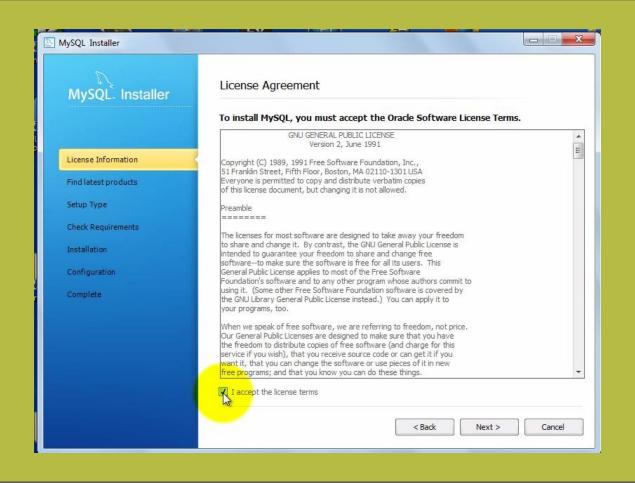




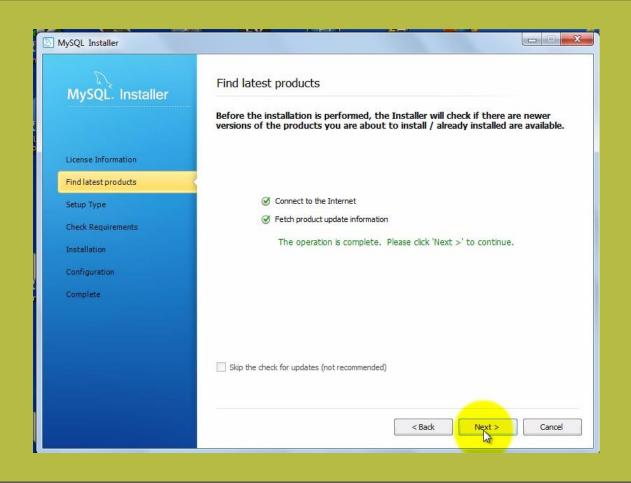




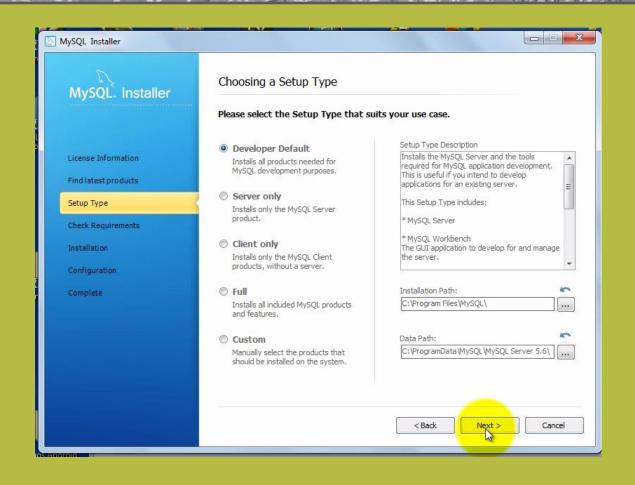



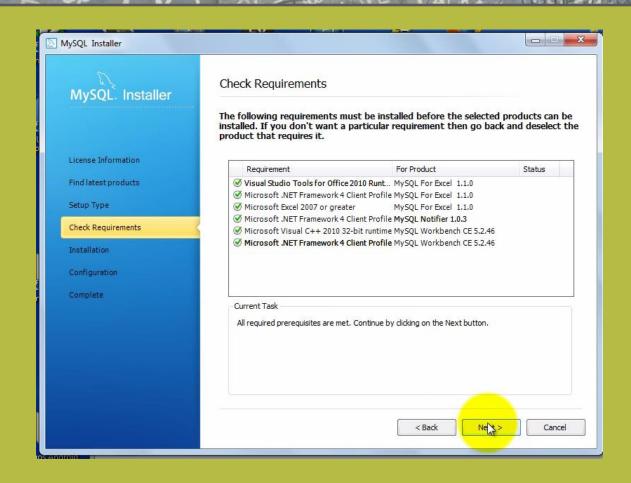



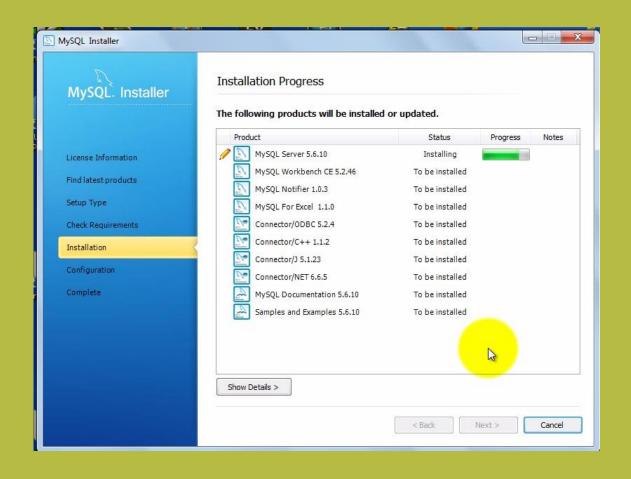












MySQL. Installer	MySQL Ser	ver Configuration			2/
	Root Accou	nt Password			
	•	Enter the password for the ro this password in a secure place		lease remember to store	
License Information	root	MySQL Root Password:	••••	I	
Find latest products		Repeat Password:	••••		
Setup Type			Passwo	ord Strength: Weak	
Check Requirements					
Installation	MySQL User	Accounts			
Configuration	~		for vour users	and applications	
Configuration Complete	D	Create MySQL user accounts Assign a role to the user that	for your users consists of a s	and applications. et of privileges.	
		Create MySQL user accounts	consists of a s	and applications, et of privileges.	Add User
	$\mathbf{\Omega}_{\!\scriptscriptstyle D}$	Create MySQL user accounts Assign a role to the user that	consists of a s	et of privileges.	Add User Edit User
	∆ _∞	Create MySQL user accounts Assign a role to the user that	consists of a s	et of privileges.	
	1 0	Create MySQL user accounts Assign a role to the user that	consists of a s	et of privileges.	Edit User
	∆ _®	Create MySQL user accounts Assign a role to the user that	consists of a s	et of privileges.	Edit User









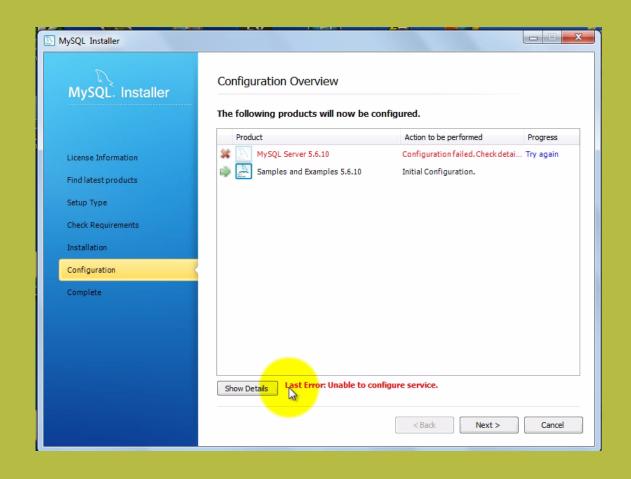



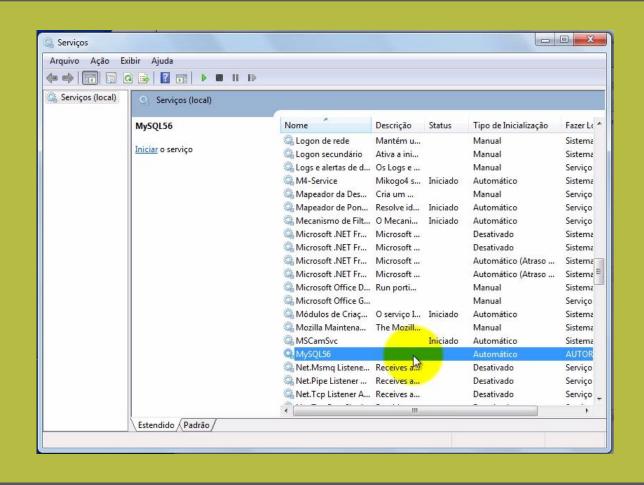



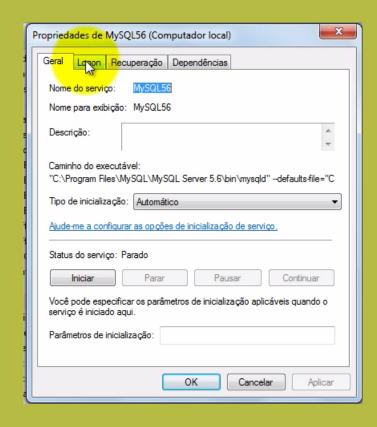




F	Propriedades de MySQL56 (Computador local)						
	Geral Logon Recuperação Dependências						
	Fazer logon como:						
1	Conta do Sistema Local						
	Permitir que o serviço interaja com a área de trabalho						
	Esta conta:						
	Senha:						
E	Confirmar senha:						
	Ajude-me a configurar as opções de logon da conta.						
ł							
١							
i							
	OK Cancelar Aplicar						
L							




Propriedades de MySQL56 (Computador local)					
Geral Logon Recuperação Dependências					
Nome do serviço: MySQL56					
Nome para exibição: MySQL56					
Descrição:					
Caminho do executável: "C:\Program Files\MySQL\MySQL Server 5.6\bin\mysqld"defaults-file="C					
Tipo de inicialização: Automático					
Ajude-me a configurar as opções de inicialização de serviço.					
Status do serviço: Parado					
Iniciar Parar Pausar Continuar					
Você <mark>pode específic</mark> ar os parâmetros de inicialização aplicáveis quando o serviço é iniciado aqui.					
Parâmetros de inicialização:					
OK Cancelar Aplicar					



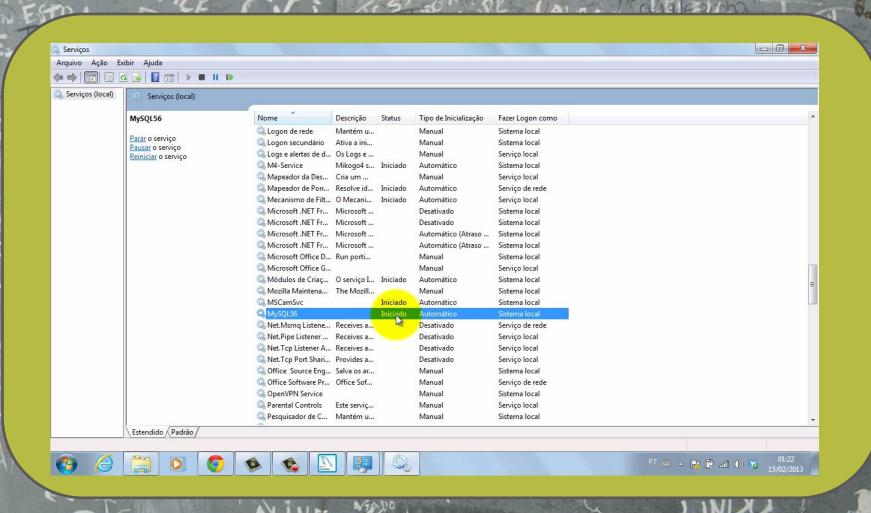




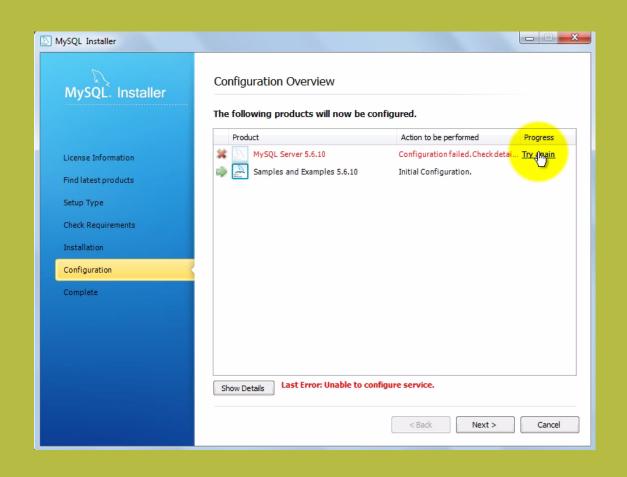









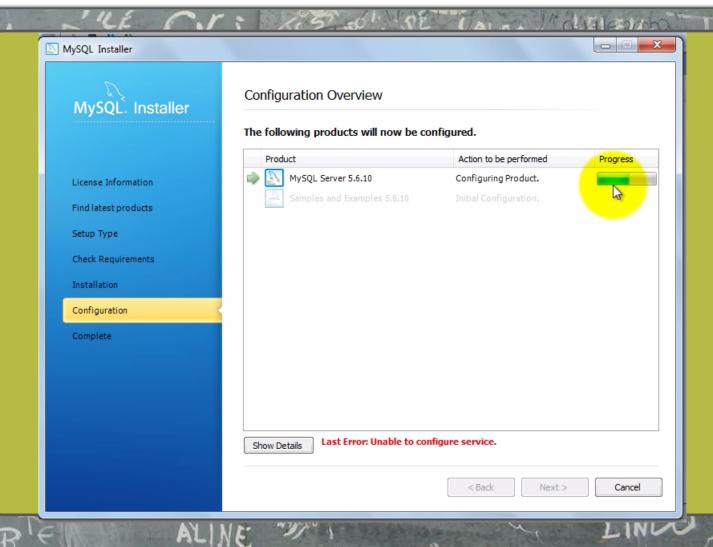




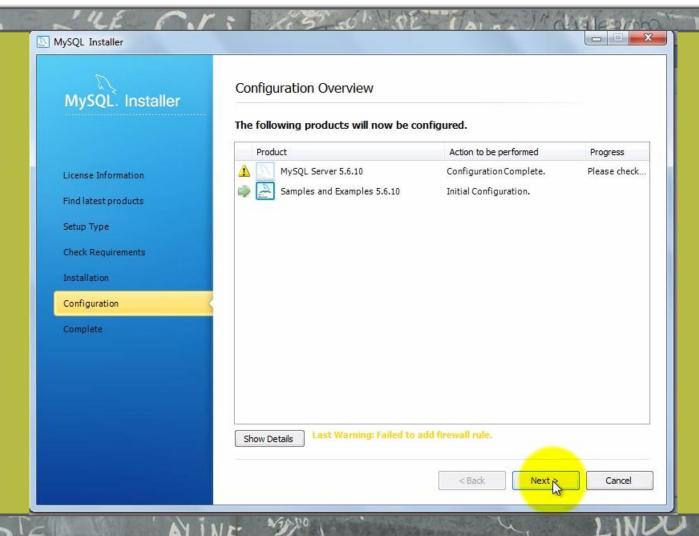




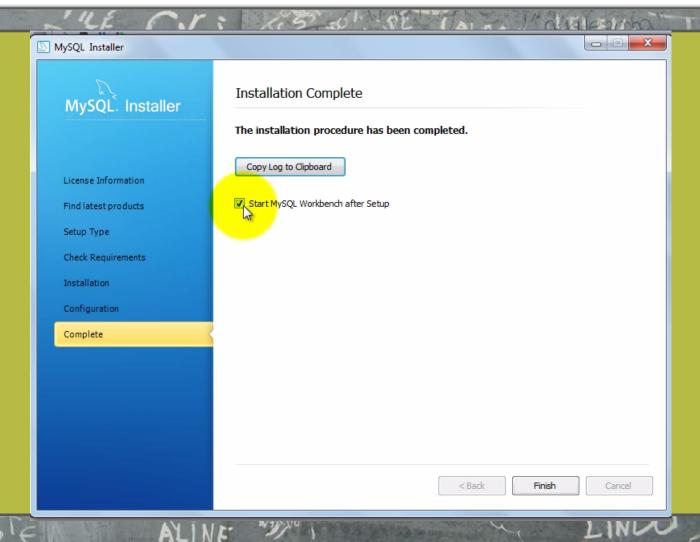




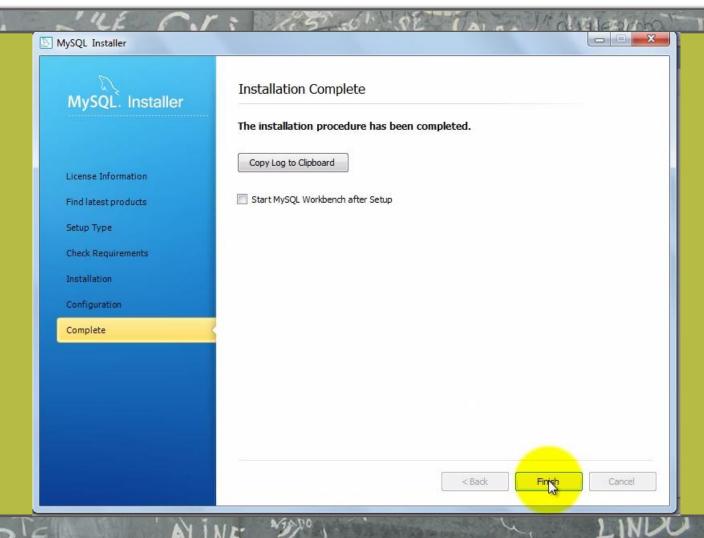



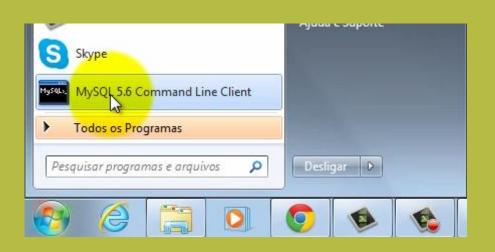



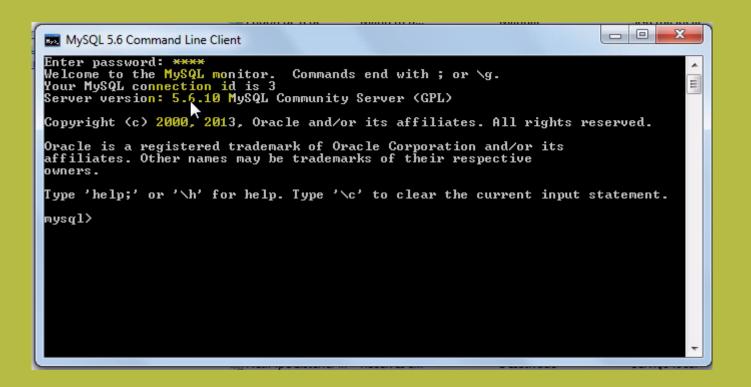



- Dúvidas ???
 - Resolva suas dúvidas ao vivo pelo Twitter
 @startupcursos
 - Posteriormente, use o nosso fórum