

IN4MATX 133: User Interface Software

Lecture 23:
Databases

Professor Daniel A. Epstein
TA Jamshir Goorabian
TA Simion Padurean

Class notes

- Regular office hours schedule this week
- A4 is due end-of-day Wednesday
 - Partner survey is up
- A5 is posted
 - Option 1: use a native device resource
 - Option 2: back up logged data to Firebase
 - Also evaluated on following good principles of mobile design and custom styling

Today's goals

By the end of today, you should be able to...

- Differentiate relational from non-relational databases
- Explain the advantages of each style of database
- Use Firebase to implement a non-relational database

Data storage

- What happens when we refresh our sleep tracking app in A4?
 - We lose all of the data we logged
- This is obviously not ideal
 - We have to tell the browser, app, etc. to store it

Data storage

- Data can be stored locally on a device
 - Android and iOS allow apps to store some data
 - Ionic Native provides (good) libraries for using local storage

**If we can store data on devices,
why do we need databases?**

Databases

- Provide reliability
 - You can get your data back if your phone dies or you get a new phone
- Provide cross-device support
 - Allow you to see and modify the same data across a phone and a desktop, for example

Databases

- Are more than files in the cloud
 - Can be “queried” efficiently to get subsets of data
- Two main approaches to making databases
 - Relational databases: MySQL, Postgres
 - Non-relational databases: MongoDB, Firebase
- Transaction: any add/delete/update/etc. made to a database

Databases

Relational databases

- Everything is organized into tables
- Tables contain columns with predefined names and data types
- Tables “relate” to one another by having overlapping or similar columns
 - Minimizes redundancy and keeps order
- Every data entry is a row of a table

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>

<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Relational databases


Relational

Person:

| Pers_ID | First_Name | Last_Name | City |
|---------|------------|-----------|---------------|
| 1 | Dexter | Lanasa | Vancouver |
| 2 | Ava | Crim | Denver |
| 3 | Michael | Plumer | New York City |
| 4 | Olivia | Conlin | Dallas |
| 5 | Sophia | Hassett | Atlanta |
| 6 | Mason | Mora | San Francisco |

Phone Numbers:

| Phone_ID | Phone_Number | Type | Person_ID |
|----------|--------------|--------|-----------|
| 75 | 111-111-1111 | Mobile | 1 |
| 76 | 222-222-2222 | Home | 2 |
| 77 | 333-333-3333 | Mobile | 3 |
| 78 | 444-444-4444 | Home | 1 |
| 79 | 555-555-5555 | Home | 4 |
| 80 | 666-666-6666 | Mobile | 5 |
| 81 | 777-777-7777 | Office | 1 |
| 82 | 888-888-8888 | Mobile | 4 |
| 83 | 999-999-9999 | Mobile | 5 |
| 84 | 111-222-2222 | Office | 5 |

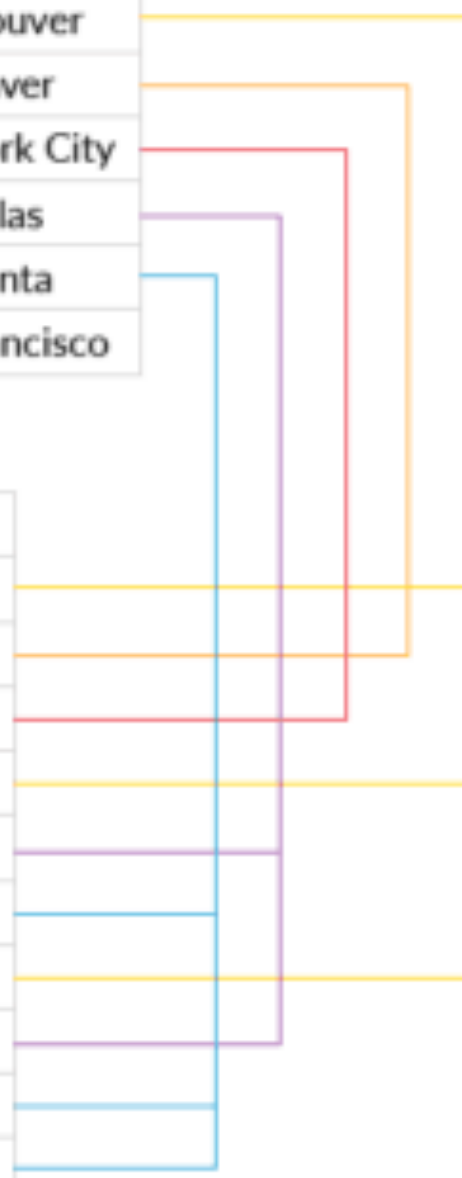

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>

<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Relational databases


Relational

Person:

| Pers_ID | First_Name | Last_Name | City |
|---------|------------|-----------|---------------|
| 1 | Dexter | Lanasa | Vancouver |
| 2 | Ava | Crim | Denver |
| 3 | Michael | Plumer | New York City |
| 4 | Olivia | Conlin | Dallas |
| 5 | Sophia | Hassett | Atlanta |
| 6 | Mason | Mora | San Francisco |

Phone Numbers:

| Phone_ID | Phone_Number | Type | Person_ID |
|----------|--------------|--------|-----------|
| 75 | 111-111-1111 | Mobile | 1 |
| 76 | 222-222-2222 | Home | 2 |
| 77 | 333-333-3333 | Mobile | 3 |
| 78 | 444-444-4444 | Home | 1 |
| 79 | 555-555-5555 | Home | 4 |
| 80 | 666-666-6666 | Mobile | 5 |
| 81 | 777-777-7777 | Office | 1 |
| 82 | 888-888-8888 | Mobile | 4 |
| 83 | 999-999-9999 | Mobile | 5 |
| 84 | 111-222-2222 | Office | 5 |

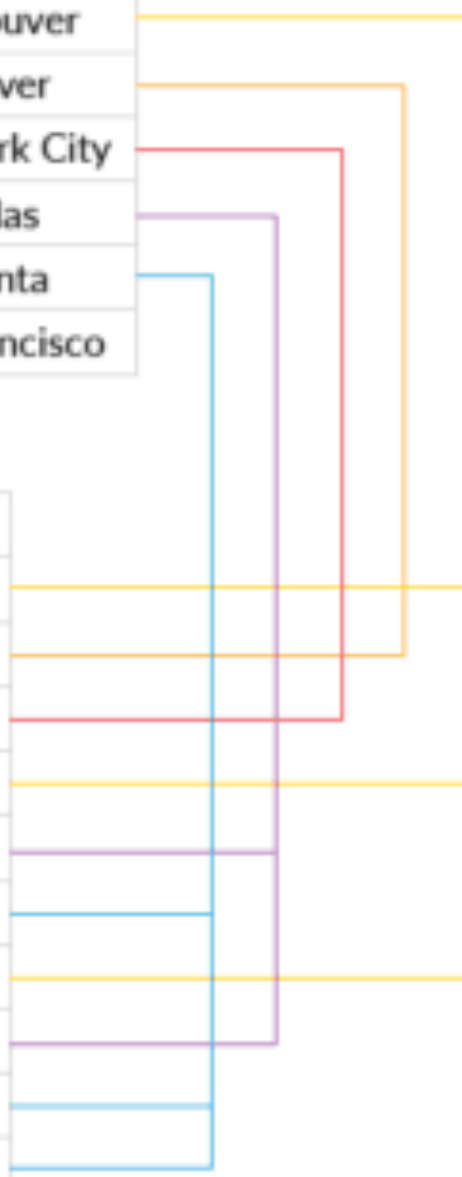

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>

<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Relational databases

```
CREATE TABLE IF NOT EXISTS tasks (  
  task_id INT AUTO_INCREMENT,  
  title VARCHAR(255) NOT NULL,  
  start_date DATE,  
  due_date DATE,  
  status TINYINT NOT NULL,  
  priority TINYINT NOT NULL,  
  description TEXT,  
  PRIMARY KEY (task_id)  
) ENGINE=INNODB;
```

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>

<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Non-relational databases

- Everything is organized into objects
- There are no restrictions on how objects are structured
- Every data entry is an object, or “document”
 - Documents may be structured differently from one another

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>
<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Non-relational databases

MongoDB
Document

```
{
  first_name: 'Dexter',
  last_name: 'Lanas',
  city: 'Vancouver',
  location: [45.123,47.232],
  phones: [
    { phone_number: '111-111-1111',
      type: mobile,
      person_id: 1, ... },
    { phone_number: '444-444-4444',
      type: home,
      person_id: 1, ... },
    { phone_number: '777-777-7777',
      type: office,
      person_id: 1, ... },
  ]
}
```

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>
<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Non-relational databases

- There is no well-defined enforced structure
- That said, flatter structures are generally better

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>
<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Non-relational databases

```
{  
  // This is a poorly nested data architecture, because iterating the children  
  // of the "chats" node to get a list of conversation titles requires  
  // potentially downloading hundreds of megabytes of messages  
  "chats": {  
    "one": {  
      "title": "Historical Tech Pioneers",  
      "messages": {  
        "m1": { "sender": "ghopper", "message": "Relay malfunction found. Cause: moth." },  
        "m2": { ... },  
        // a very long list of messages  
      }  
    },  
    "two": { ... }  
  }  
}
```

<https://firebase.google.com/docs/database/ios/structure-data>

Databases

Non-relational databases

```
{
  // Chats contains only meta info about each conversation stored under the chats's unique ID
  "chats": {
    "one": {
      "title": "Historical Tech Pioneers",
      "lastMessage": "ghopper: Relay malfunction found. Cause: moth."
    },
    "two": { ... }
  },
  // Messages are separate from data we may want to iterate quickly but still easily paginated and queried,
  // and organized by chat conversation ID
  "messages": {
    "one": {
      "m1": {
        "name": "eclarke",
        "message": "The relay seems to be malfunctioning."
      },
      "m2": { ... }
    },
    "two": { ... }
  }
}
```

<https://firebase.google.com/docs/database/ios/structure-data>

Question

Which database structure will be best for retrieving all first names?

- A** The relational database
- B** The non-relational database
- C** They will be about the same
- D** I'm not sure
- E** [space intentionally left blank]


Relational

Person:

| Pers_ID | First_Name | Last_Name | City |
|---------|------------|-----------|---------------|
| 1 | Dexter | Lanasa | Vancouver |
| 2 | Ava | Crim | Denver |
| 3 | Michael | Plumer | New York City |
| 4 | Olivia | Conlin | Dallas |
| 5 | Sophia | Hassett | Atlanta |
| 6 | Mason | Mora | San Francisco |

Phone Numbers:

| Phone_ID | Phone_Number | Type | Person_ID |
|----------|--------------|--------|-----------|
| 75 | 111-111-1111 | Mobile | 1 |
| 76 | 222-222-2222 | Home | 2 |
| 77 | 333-333-3333 | Mobile | 3 |
| 78 | 444-444-4444 | Home | 1 |
| 79 | 555-555-5555 | Home | 4 |
| 80 | 666-666-6666 | Mobile | 5 |
| 81 | 777-777-7777 | Office | 1 |
| 82 | 888-888-8888 | Mobile | 4 |
| 83 | 999-999-9999 | Mobile | 5 |
| 84 | 111-222-2222 | Office | 5 |



Non-relational

```
{  
  first_name: 'Dexter',  
  last_name: 'Lanas',  
  city: 'Vancouver',  
  location: [45.123,47.232],  
  phones: [  
    { phone_number: '111-111-1111',  
      type: mobile,  
      person_id: 1, ... },  
    { phone_number: '444-444-4444',  
      type: home,  
      person_id: 1, ... },  
    { phone_number: '777-777-7777',  
      type: office,  
      person_id: 1, ... },  
  ]  
}
```

Question

Which database structure will be best for retrieving all phone numbers?

- A** The relational database
- B** The non-relational database
- C** They will be about the same
- D** I'm not sure
- E** [space intentionally left blank]


Relational

Person:

| Pers_ID | First_Name | Last_Name | City |
|---------|------------|-----------|---------------|
| 1 | Dexter | Lanasa | Vancouver |
| 2 | Ava | Crim | Denver |
| 3 | Michael | Plumer | New York City |
| 4 | Olivia | Conlin | Dallas |
| 5 | Sophia | Hassett | Atlanta |
| 6 | Mason | Mora | San Francisco |

Phone Numbers:

| Phone_ID | Phone_Number | Type | Person_ID |
|----------|--------------|--------|-----------|
| 75 | 111-111-1111 | Mobile | 1 |
| 76 | 222-222-2222 | Home | 2 |
| 77 | 333-333-3333 | Mobile | 3 |
| 78 | 444-444-4444 | Home | 1 |
| 79 | 555-555-5555 | Home | 4 |
| 80 | 666-666-6666 | Mobile | 5 |
| 81 | 777-777-7777 | Office | 1 |
| 82 | 888-888-8888 | Mobile | 4 |
| 83 | 999-999-9999 | Mobile | 5 |
| 84 | 111-222-2222 | Office | 5 |



Non-relational

```
{  
  first_name: 'Dexter',  
  last_name: 'Lanas',  
  city: 'Vancouver',  
  location: [45.123,47.232],  
  phones: [  
    { phone_number: '111-111-1111',  
      type: mobile,  
      person_id: 1, ... },  
    { phone_number: '444-444-4444',  
      type: home,  
      person_id: 1, ... },  
    { phone_number: '777-777-7777',  
      type: office,  
      person_id: 1, ... },  
  ]  
}
```

Question

Which database structure will be best for retrieving all data?

- A** The relational database
- B** The non-relational database
- C** They will be about the same
- D** I'm not sure
- E** [space intentionally left blank]


Relational

Person:

| Pers_ID | First_Name | Last_Name | City |
|---------|------------|-----------|---------------|
| 1 | Dexter | Lanasa | Vancouver |
| 2 | Ava | Crim | Denver |
| 3 | Michael | Plumer | New York City |
| 4 | Olivia | Conlin | Dallas |
| 5 | Sophia | Hassett | Atlanta |
| 6 | Mason | Mora | San Francisco |

Phone Numbers:

| Phone_ID | Phone_Number | Type | Person_ID |
|----------|--------------|--------|-----------|
| 75 | 111-111-1111 | Mobile | 1 |
| 76 | 222-222-2222 | Home | 2 |
| 77 | 333-333-3333 | Mobile | 3 |
| 78 | 444-444-4444 | Home | 1 |
| 79 | 555-555-5555 | Home | 4 |
| 80 | 666-666-6666 | Mobile | 5 |
| 81 | 777-777-7777 | Office | 1 |
| 82 | 888-888-8888 | Mobile | 4 |
| 83 | 999-999-9999 | Mobile | 5 |
| 84 | 111-222-2222 | Office | 5 |

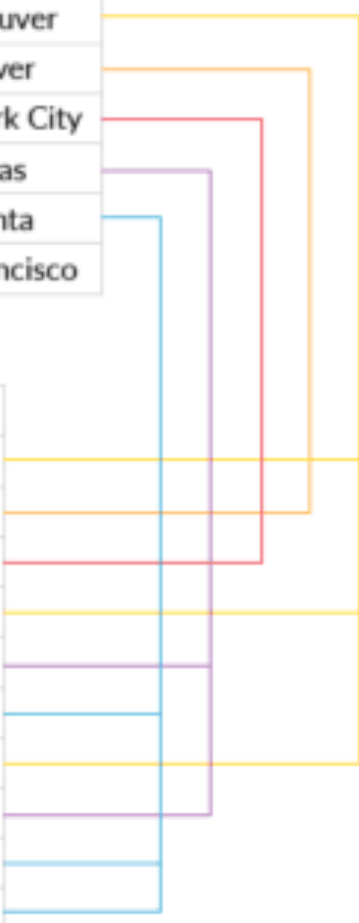

Non-relational

```
{  
  first_name: 'Dexter',  
  last_name: 'Lanas',  
  city: 'Vancouver',  
  location: [45.123,47.232],  
  phones: [  
    { phone_number: '111-111-1111',  
      type: mobile,  
      person_id: 1, ... },  
    { phone_number: '444-444-4444',  
      type: home,  
      person_id: 1, ... },  
    { phone_number: '777-777-7777',  
      type: office,  
      person_id: 1, ... },  
  ]  
}
```

Databases

Advantages of relational databases

- Relational databases support better querying
 - Provide *languages* for querying, such as Sequel Query Language (SQL)
 - Those languages can be used to ask for specific tables or even join data across tables
 - “Give me the first name of every user whose phone number starts with 949”

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>
<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Advantages of relational databases

- Relational databases are more organized
 - Because field types are defined, data reliably follows that structure
- Relational databases are more reliable
 - Structure is enforced when new data is added
 - It's easy to “get” the current state of the database

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>
<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Advantages of non-relational databases

- Non-relational databases support more flexibility
 - Structure imposes restrictions
 - Adding a new field (column) can mess up a relational database
- Non-relational databases are faster for simple operations
 - It's much easier to “watch all the files” than to query and index many rows across multiple tables

<https://www.neonrain.com/blog/mysql-vs-mongodb-looking-at-relational-and-non-relational-databases/>
<https://www.mongodb.com/scale/relational-vs-non-relational-database>

Databases

Relational vs. Non-relational

- Relational databases tend to be used in Enterprise, large-scale applications
 - It's important that data conforms to standards
 - It's important to robustly query large amounts of data
- Non-relational databases tend to be used in smaller applications
 - Data flexibility is valuable
 - Data is small enough to reliably retrieve and parse
- That said, plenty of large apps use non-relational databases and vice versa

One non-relational database: Firebase

Firebase


- First released in 2011
- Acquired by Google in 2014
- Has features besides databases
 - Media storage
 - Authentication
 - Analytics



Firebase

Setting up the database


- Create a new project: <https://firebase.google.com/>
- Create a database

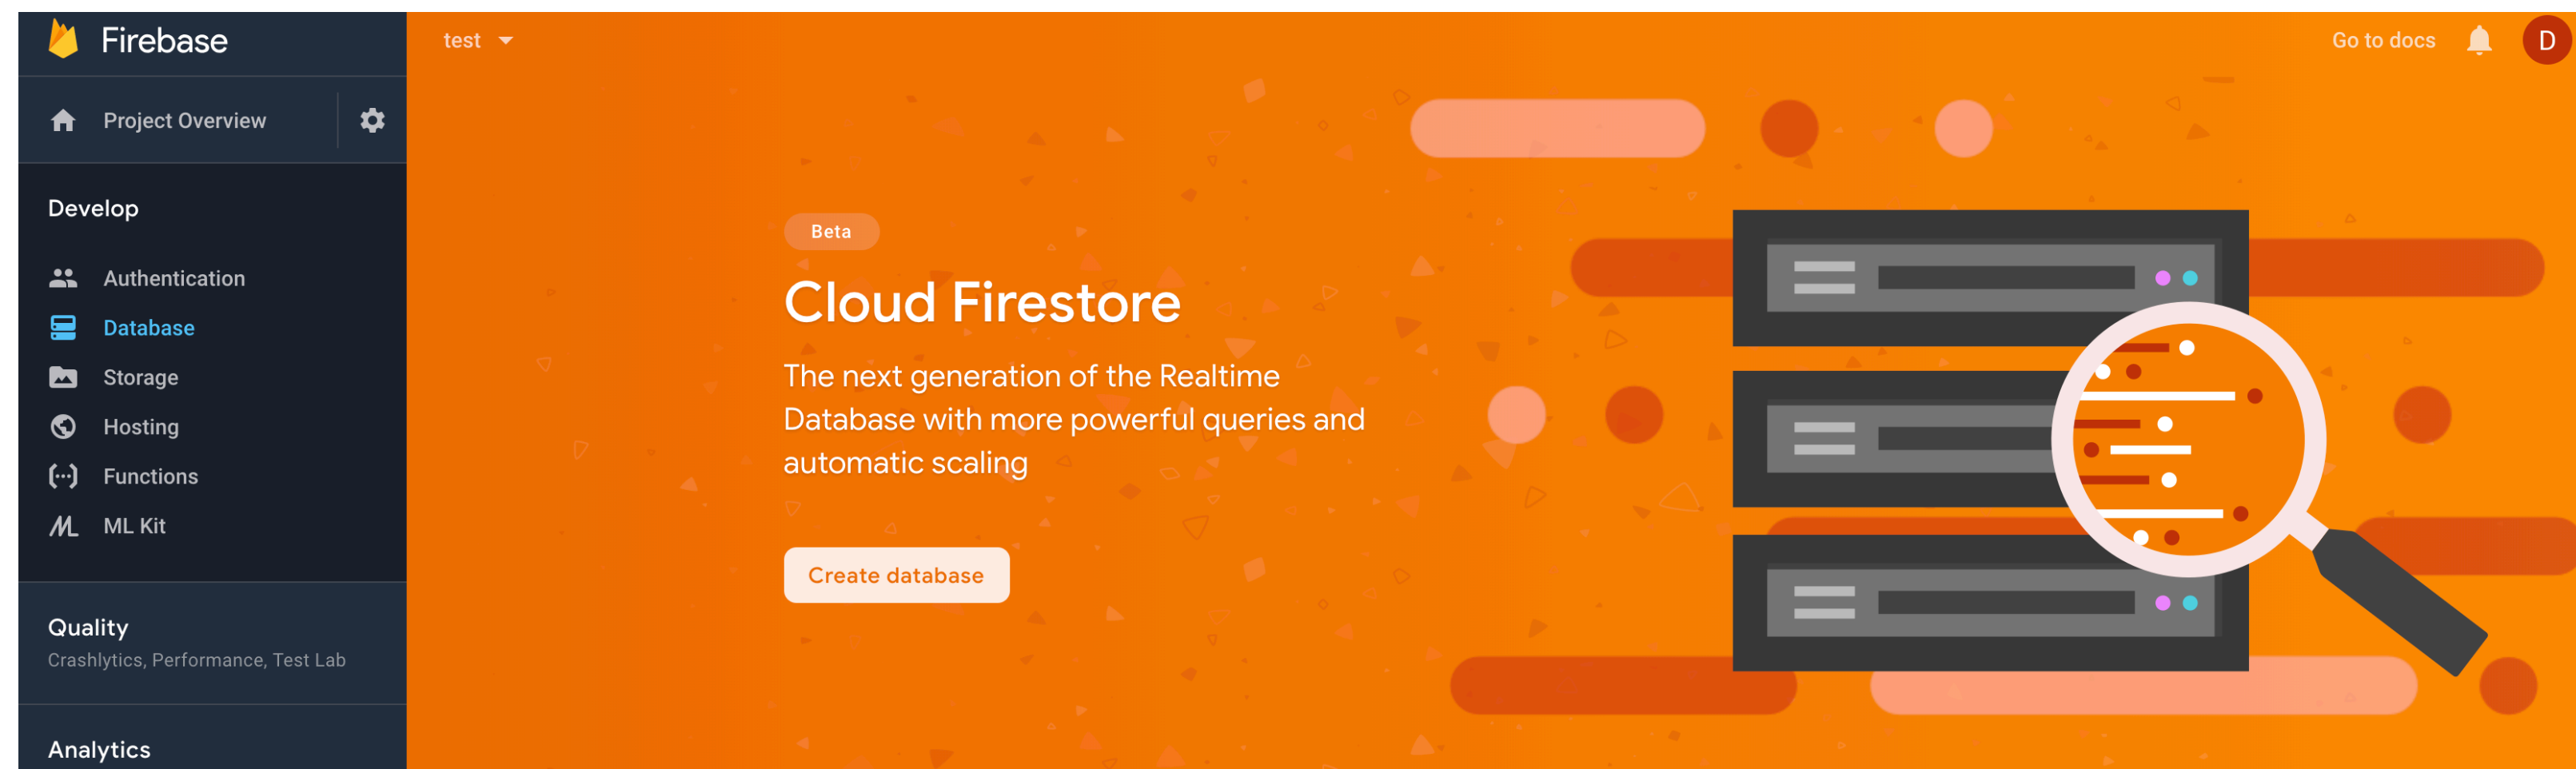

Firestore


Setting up the database

- Start your database in “test mode”
 - Anyone can read or write to your database
 - This means *anyone*, even localhost
 - Gets around browser’s restrictions
 - This is bad practice, of course. It’s better to allow specific users
 - Take a databases class to learn about permissions

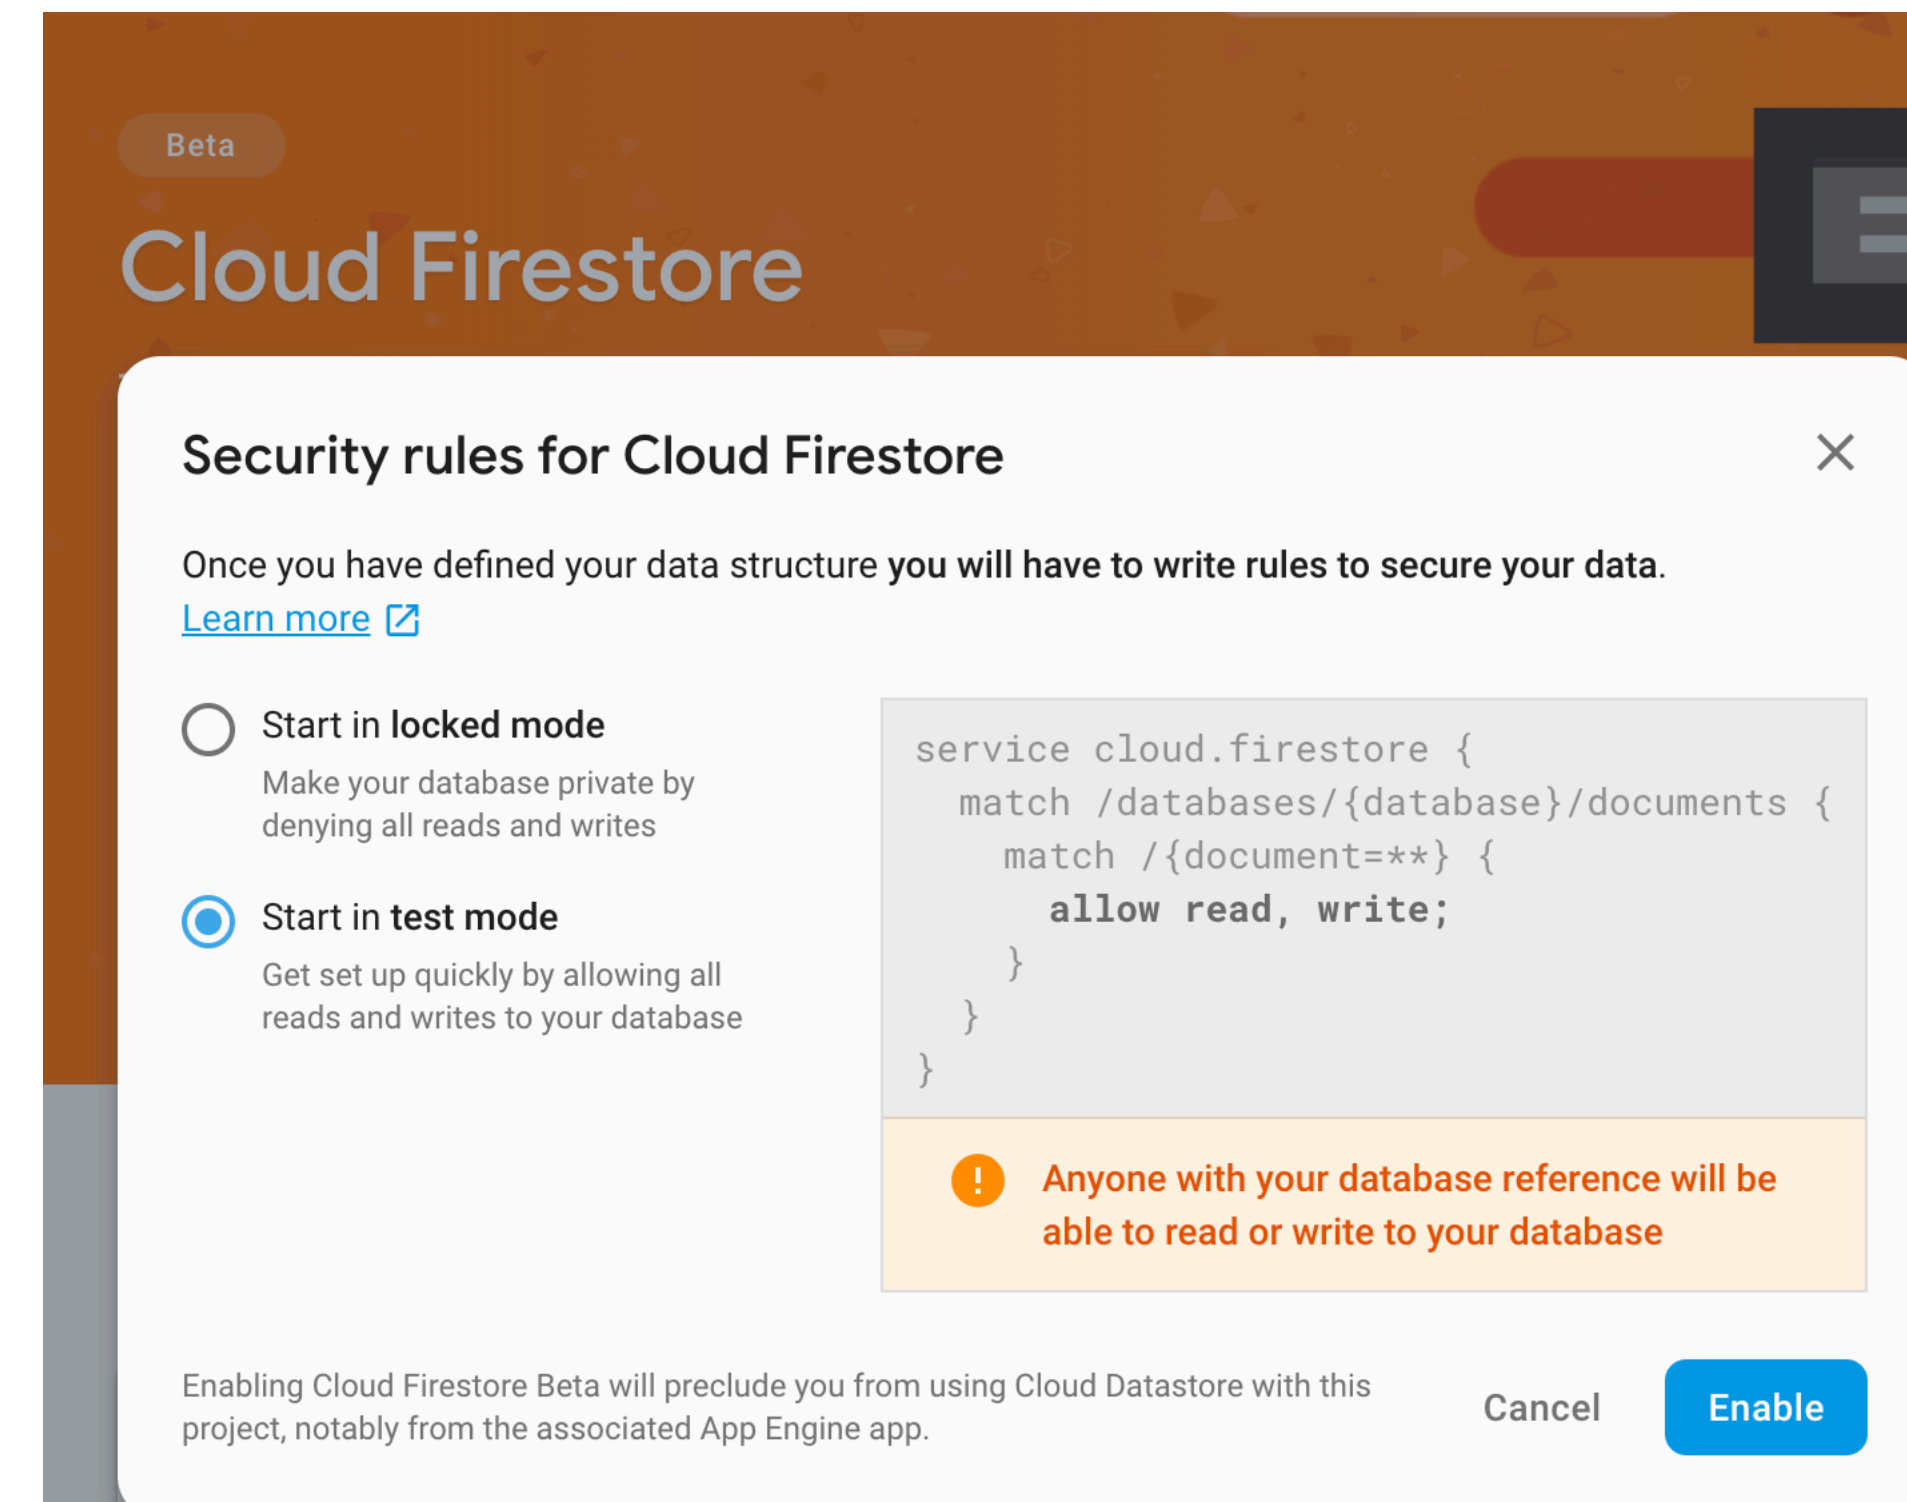

Firestore

Setting up the database

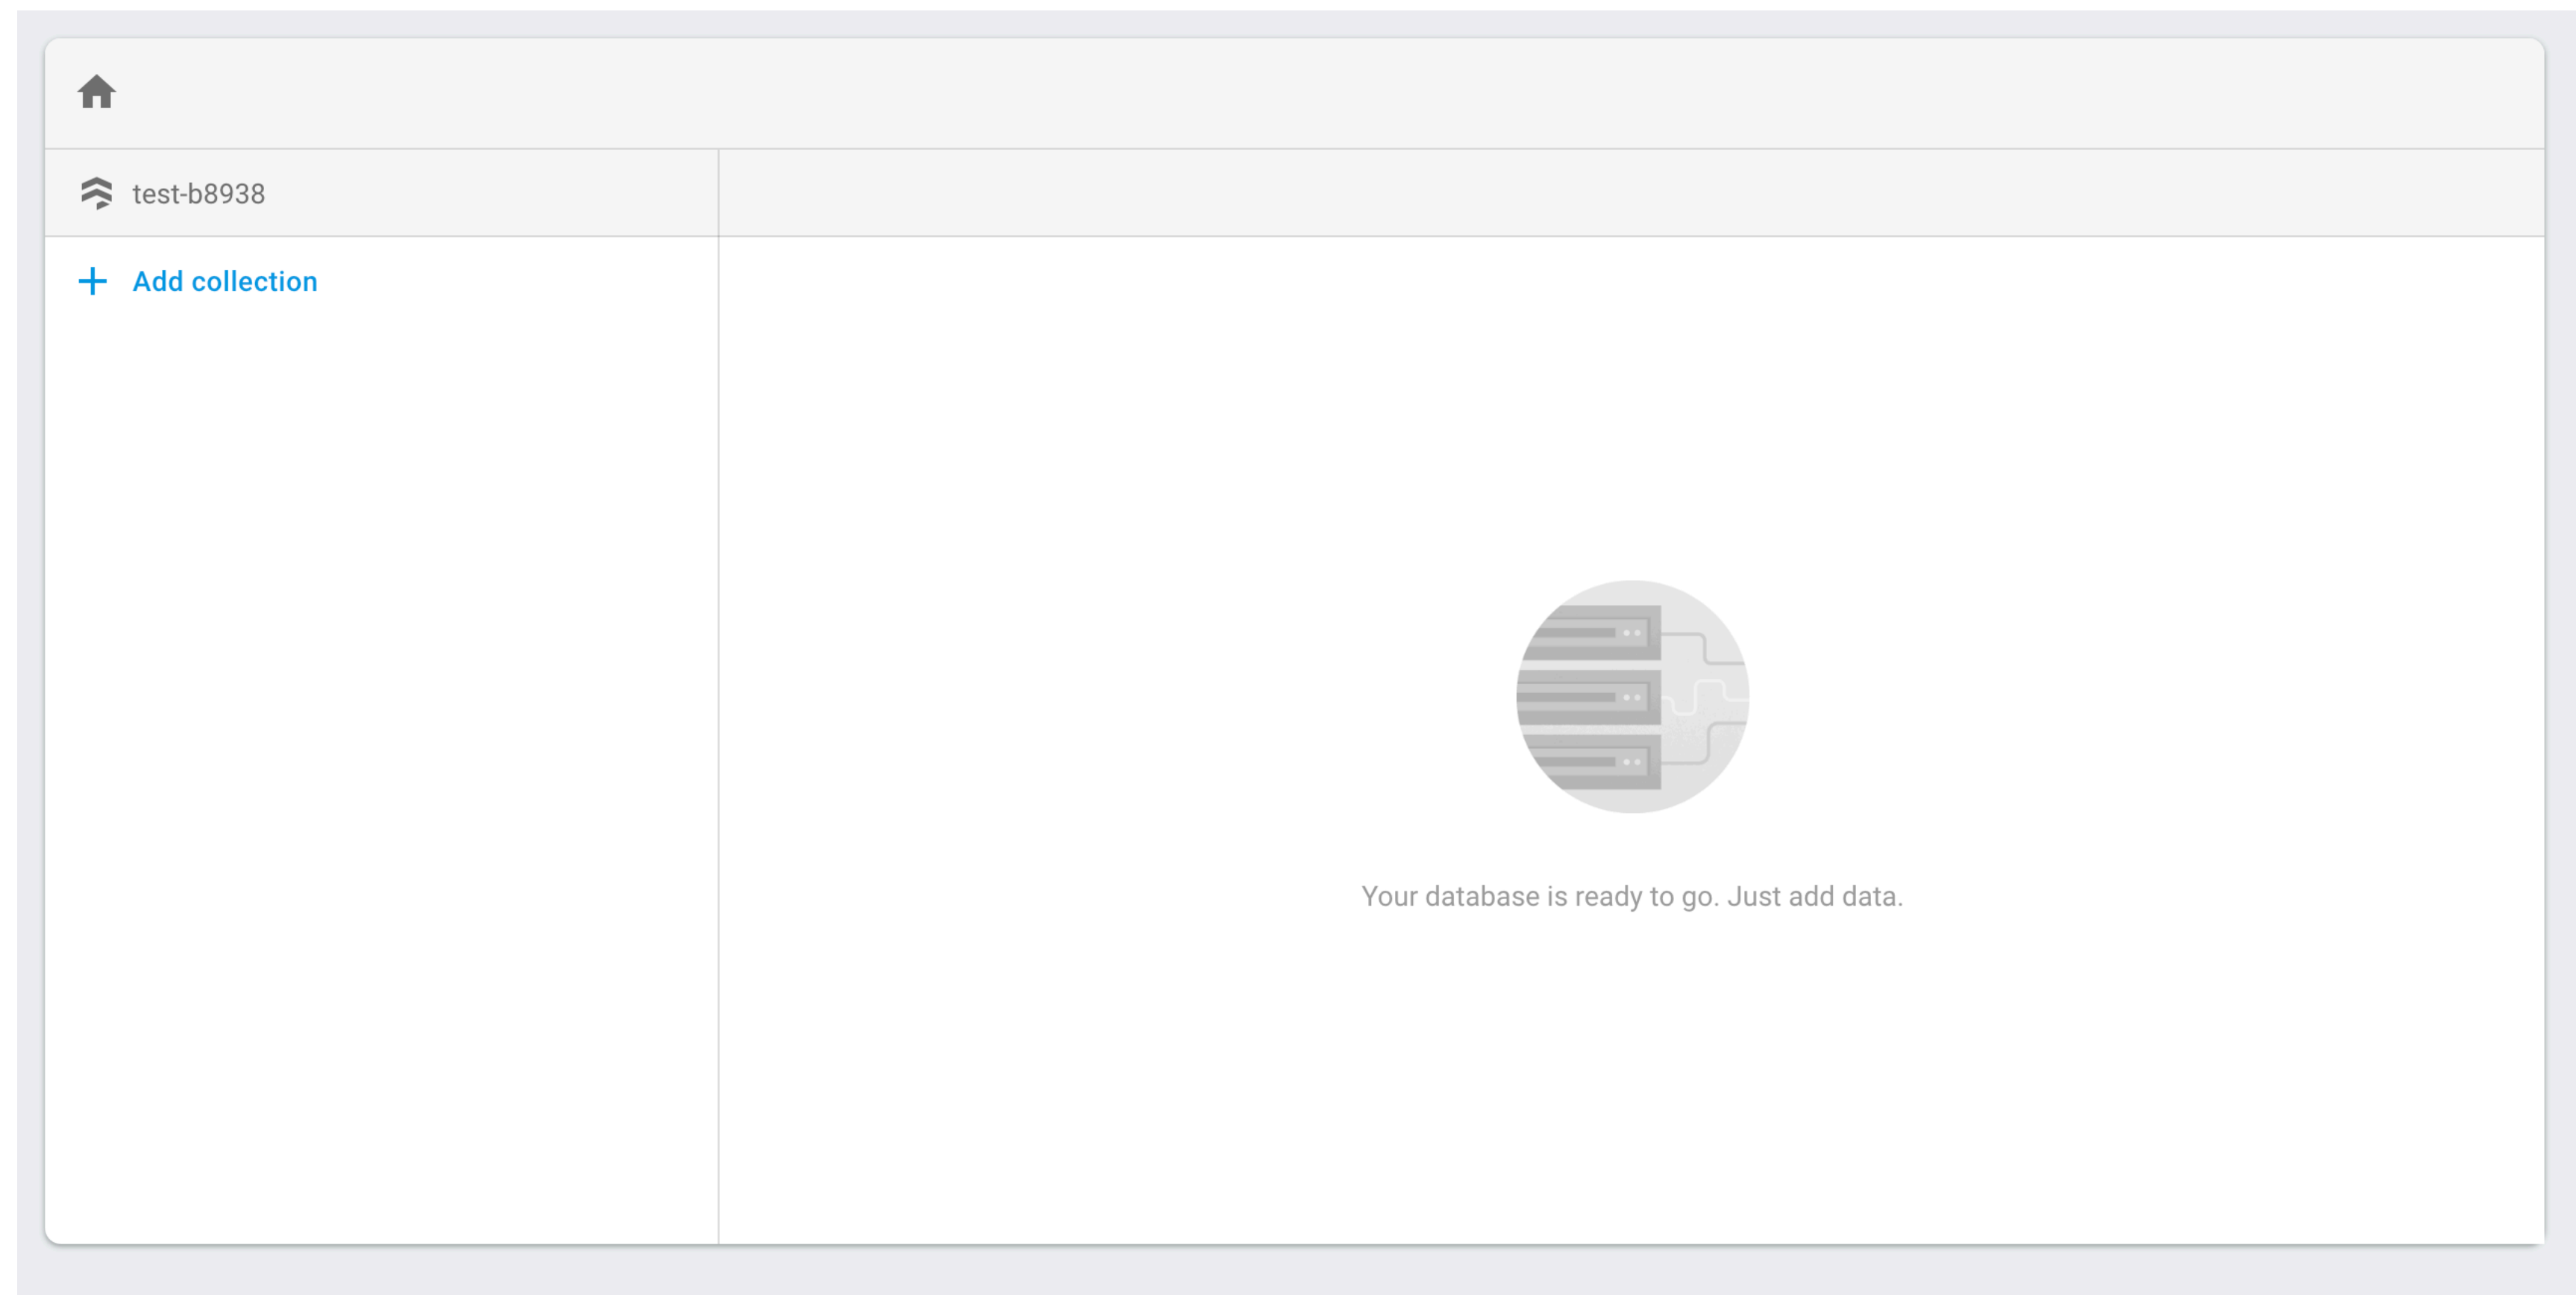

Firestore

Setting up the database

- Firestore documents (objects) are organized into *collections*
- Collections are somewhat like tables in relational databases
- But Firestore is non-relational and has no structure requirement
- Multiple documents in the same collection may have different structure
- Example collections: users, sleepdata

<https://firebase.google.com/docs/firestore/data-model>

Firebase

Setting up the mobile app


- Angular officially supports a Firebase library
 - It works with Ionic since Ionic builds on Angular
- `npm install firebase`
- `npm install @angular/fire`

<https://github.com/angular/angularfire2>

Firebase

Setting up the mobile app

- Add configuration information for your Firebase app to `environments.ts` file in Ionic
- Edit Ionic's `module.ts` to point to this environment information

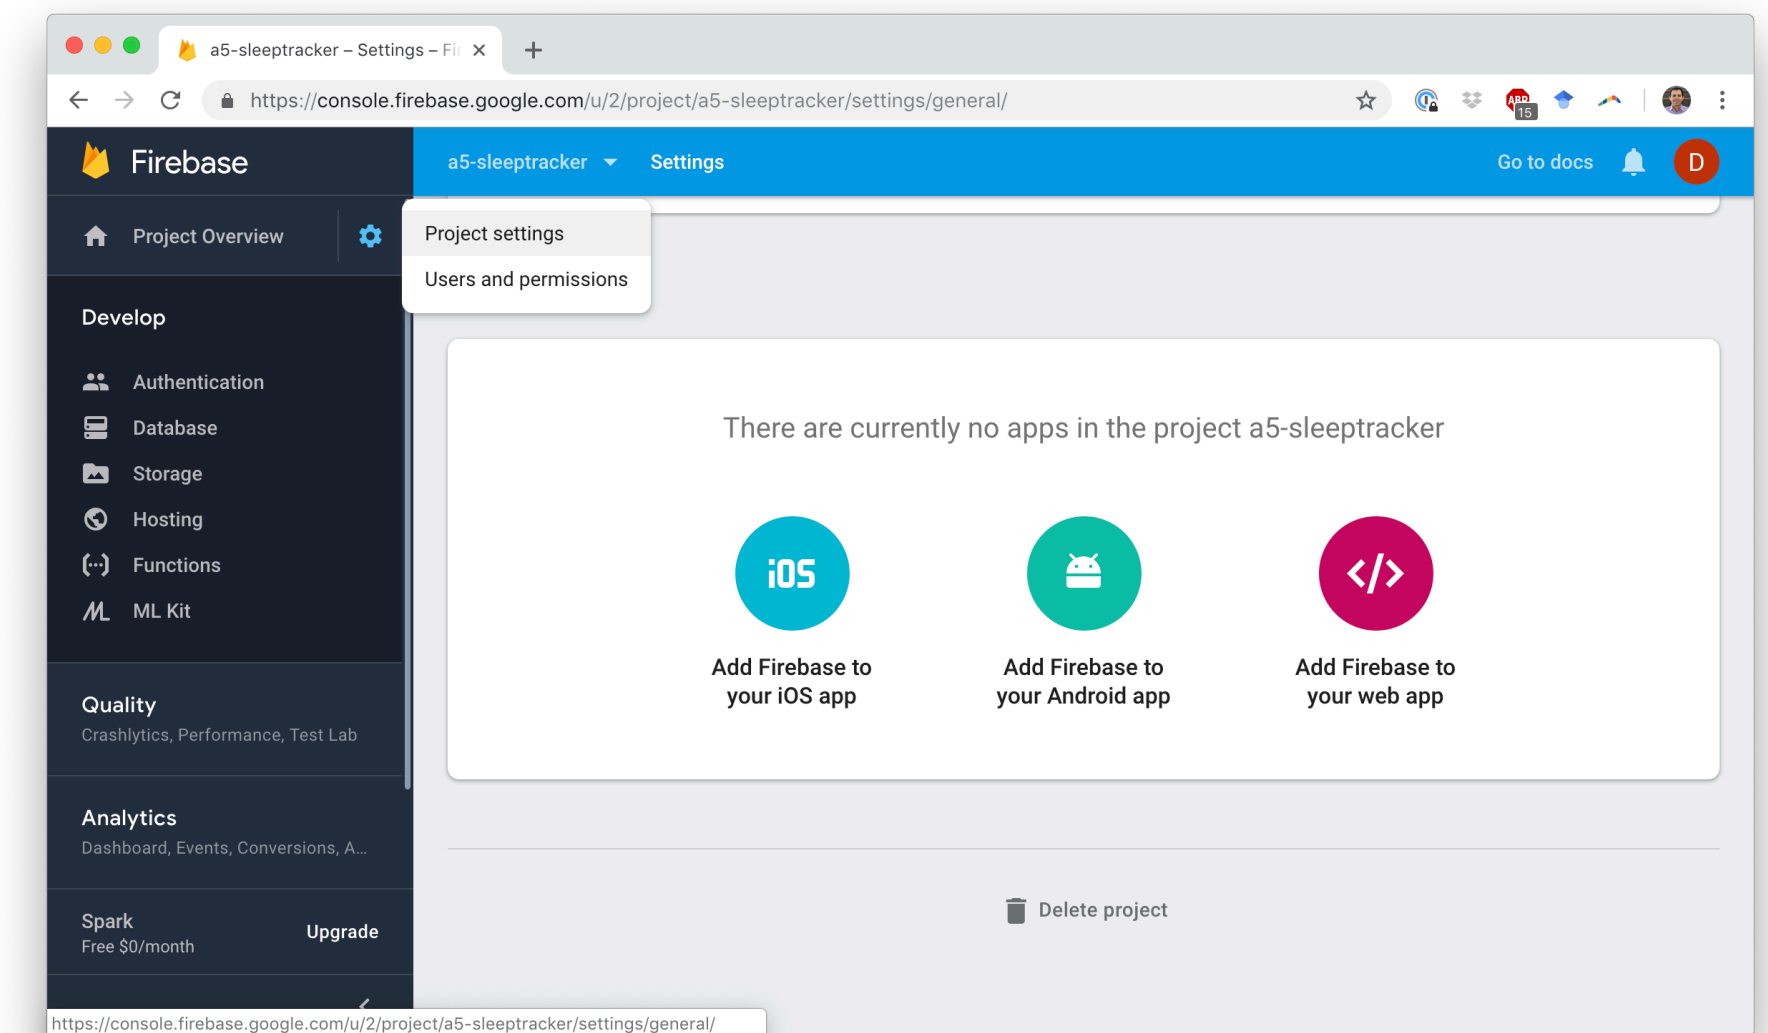

<https://github.com/angular/angularfire2/blob/master/docs/install-and-setup.md#4-add-firebase-config-to-environments-variable>

Firestore

Accessing the database from the mobile app

- We don't "get" data once
 - What if someone logged their sleep from their desktop?
 - Documents can be large, it takes some time to add or update
 - Instead, we use an `Observable` to listen for any time the data changes
 - Like how we listened for new accelerometer data every second with Ionic Native

Firestore

Listening for changes

```
/* .component.ts */
export class MyApp {
  testItems: Observable<any[]>;
  constructor(db: AngularFireStore) {
    this.testItems = db.collection('test-collection').valueChanges();
  }
}
```

```
<!--.component.html -->
<ul>
  <li *ngFor="let item of testItems | async">
    {{ item.name }}
  </li>
</ul>
```

Firestore

Add

- New objects can be added asynchronously

```
export class FirestoreService {
  collection:AngularFirestoreCollection;

  constructor(db:AngularFirestore) {
    this.collection = db.collection('test-collection');
  }

  addData(data:{}) {
    this.collection.add(data).then((reference) => {
      console.log("Reference to added data, kind of like a URL");
      console.log(reference);
    });
  }
}
```

Firestore

Delete and Update

- The string reference can be used to delete or update documents

```
deleteDocument(reference:string) {  
  this.collection.doc(reference).delete().then(() => {  
    console.log('The document at ' + reference + 'no longer exists');  
  });  
}
```

```
updateDocument(reference:string, newData:{}) {  
  this.collection.doc(reference).update(newData).then(() => {  
    console.log('The document at ' + reference + 'is now ' + newData);  
  });  
}
```

Firestore

Querying data

```
var citiesRef = db.collection("cities");

citiesRef.doc("SF").set({
  name: "San Francisco", state: "CA", country: "USA",
  capital: false, population: 860000,
  regions: ["west_coast", "norcal"] });
citiesRef.doc("LA").set({
  name: "Los Angeles", state: "CA", country: "USA",
  capital: false, population: 3900000,
  regions: ["west_coast", "socal"] });
citiesRef.doc("DC").set({
  name: "Washington, D.C.", state: null, country: "USA",
  capital: true, population: 680000,
  regions: ["east_coast"] });
citiesRef.doc("TOK").set({
  name: "Tokyo", state: null, country: "Japan",
  capital: true, population: 9000000,
  regions: ["kanto", "honshu"] });
citiesRef.doc("BJ").set({
  name: "Beijing", state: null, country: "China",
  capital: true, population: 21500000,
  regions: ["jingjinji", "hebei"] });
```

```
var citiesRef = db.collection("cities");

citiesRef.where("state", "==", "CA");
//SF, LA

citiesRef.where("capital", "==", true);
//D.C., Tokyo, Beijing

citiesRef.where("population", "<", 1000000);
//LA, Tokyo, Beijing

citiesRef.where("name", ">=", "San Francisco");
//SF, Tokyo, D.C.
```

<https://firebase.google.com/docs/firestore/query-data/queries>

Firestore

Converting TypeScript objects to and from JSON

- Firestore expects JSON rather than a TypeScript object
- TypeScript classes need to be converted to and from JSON

```
export class DataLog {  
  id:string;  
  values:number[];  
  
  toObject():{} {  
    return { 'id':this.id,  
            'value':this.values};  
  }  
  
  fromObject(object:{}) {  
    this.id = object['id'];  
    this.values = object['value'];  
  }  
}
```

Firestore

Converting TypeScript objects to and from JSON

- Non-primitive fields, like Date, may need extra conversion

```
export class DataLog {  
  date: Date;  
  
  toObject(): {} {  
    return { 'date': this.date };  
  }  
  
  fromObject(object: {}) {  
    // Stored as number of milliseconds  
    this.date = new Date(object['date'].seconds * 1000);  
  }  
}
```

Today's goals

By the end of today, you should be able to...

- Differentiate relational from non-relational databases
- Explain the advantages of each style of database
- Use Firebase to implement a non-relational database

IN4MATX 133: User Interface Software

Lecture 23:
Databases

Professor Daniel A. Epstein
TA Jamshir Goorabian
TA Simion Padurean