

IN4MATX 133: User Interface Software

Lecture 3:
CSS

Professor Daniel A. Epstein
TA Jamshir Goorabian
TA Simion Padurean

Getting information

- Most of the policy and assignment questions we've received are answered on the website (<http://inf133-fa18.depstein.net>)
- Slack vs. Email has worked out pretty well so far
 - Slack for lightweight questions, email for heavier ones
 - My response time on Slack is going to increase a bit, but the TAs will respond to more questions
- If you *do* email us, please CC the instructors list! (informatics-133-staff@uci.edu)

Git and GitHub

- There are some guides in the assignment description
- Video which demos GitHub Desktop: <https://www.youtube.com/watch?v=77W2JSL7-r8>
- Office hours are a great place to answer individual questions
 - My first ones are today after class
 - Check the calendar for the rest of the schedule

Clickers

- Participation credit starts today
- I emailed everyone who was registered, but we did not have responses for
 - If you didn't get an email, that means we got your clicker responses
- Submit responses if you're not registered yet
 - We can link it to Canvas later

Supporting multiple languages in HTML

- Designate a “primary” language

```
<html lang="en">
```

- The `lang` attribute can be used for tags with content in a different language

```
<blockquote lang="fr">
```

Le plus grand faible des hommes, c'est l'amour qu'ils ont de la vie.

```
</blockquote>
```

- Links to a page of a different language should designate `hreflang`




```
<a href="google.fr" hreflang="fr">French</a>
```

Today: CSS

CSS



Same page, different stylesheets

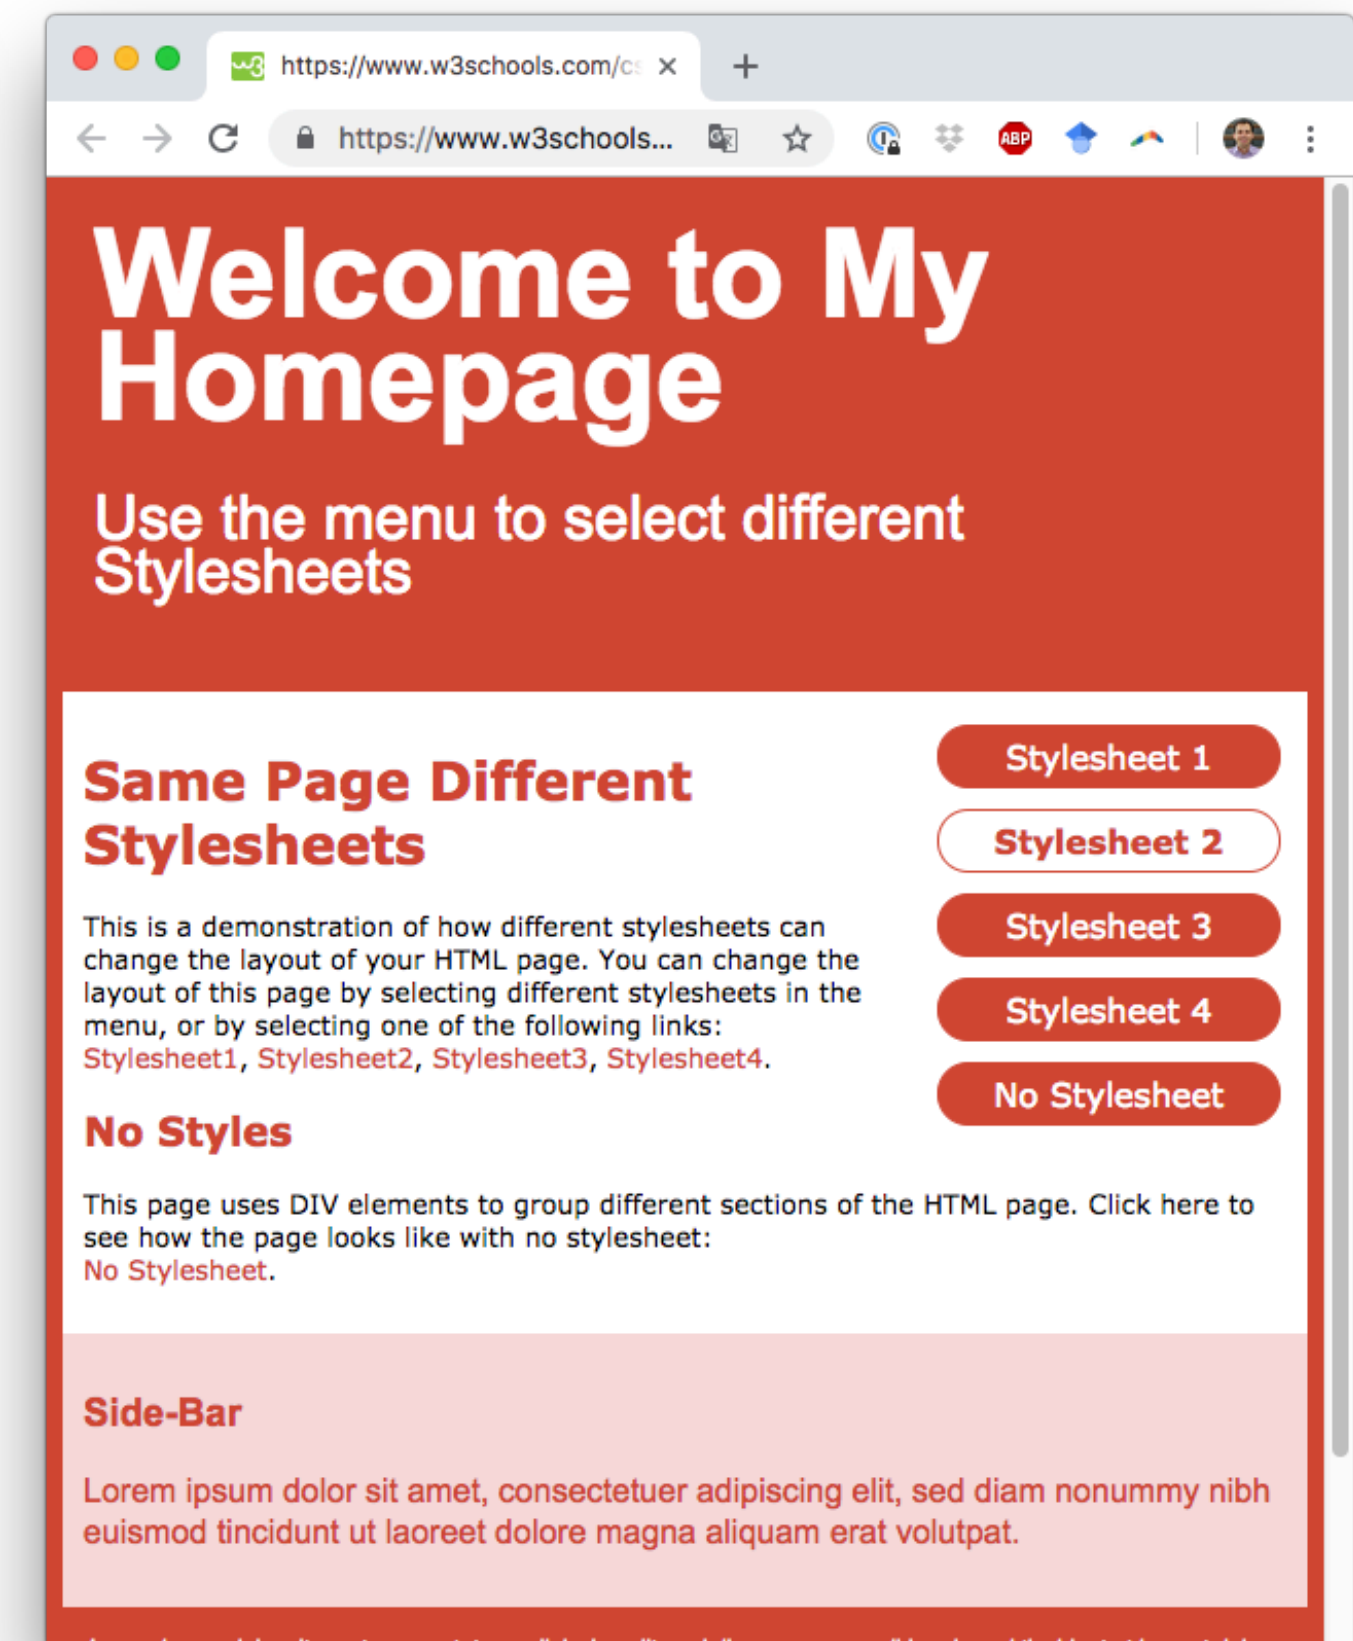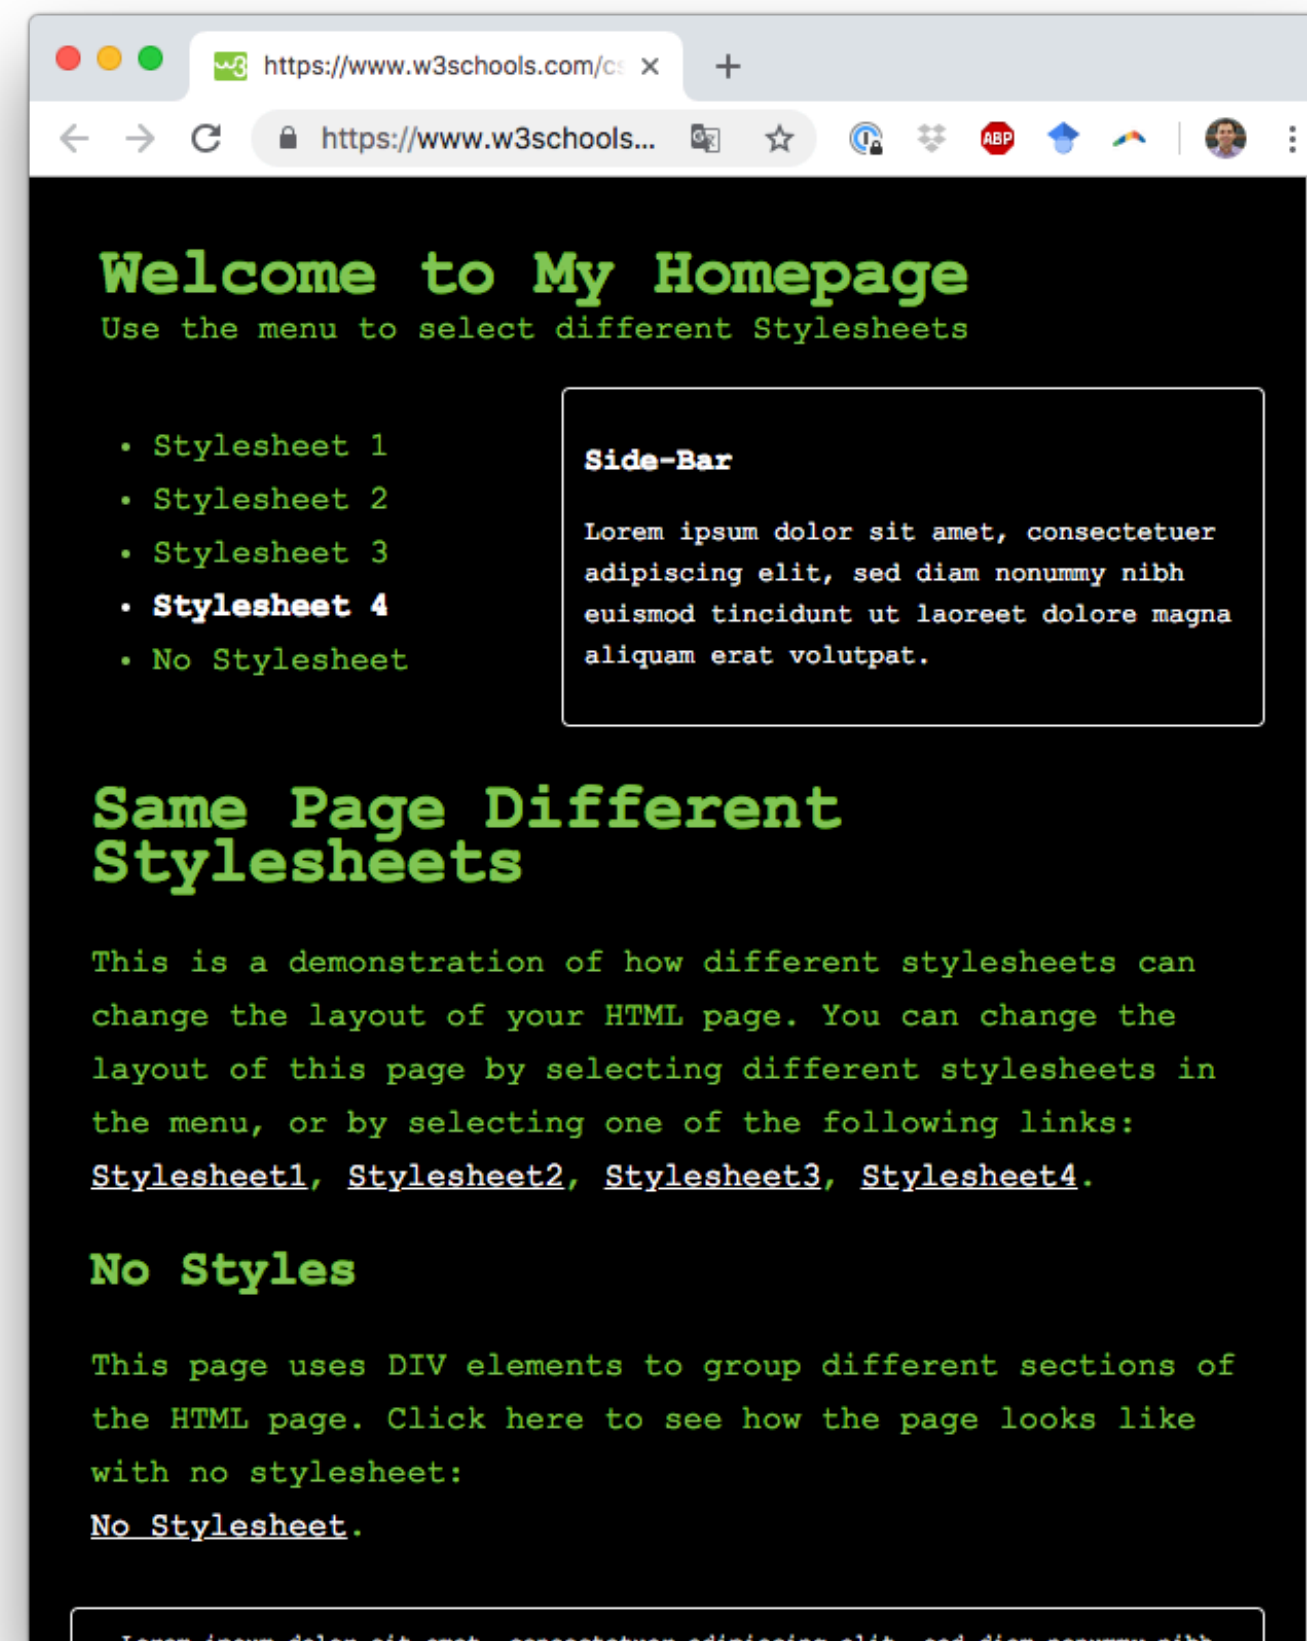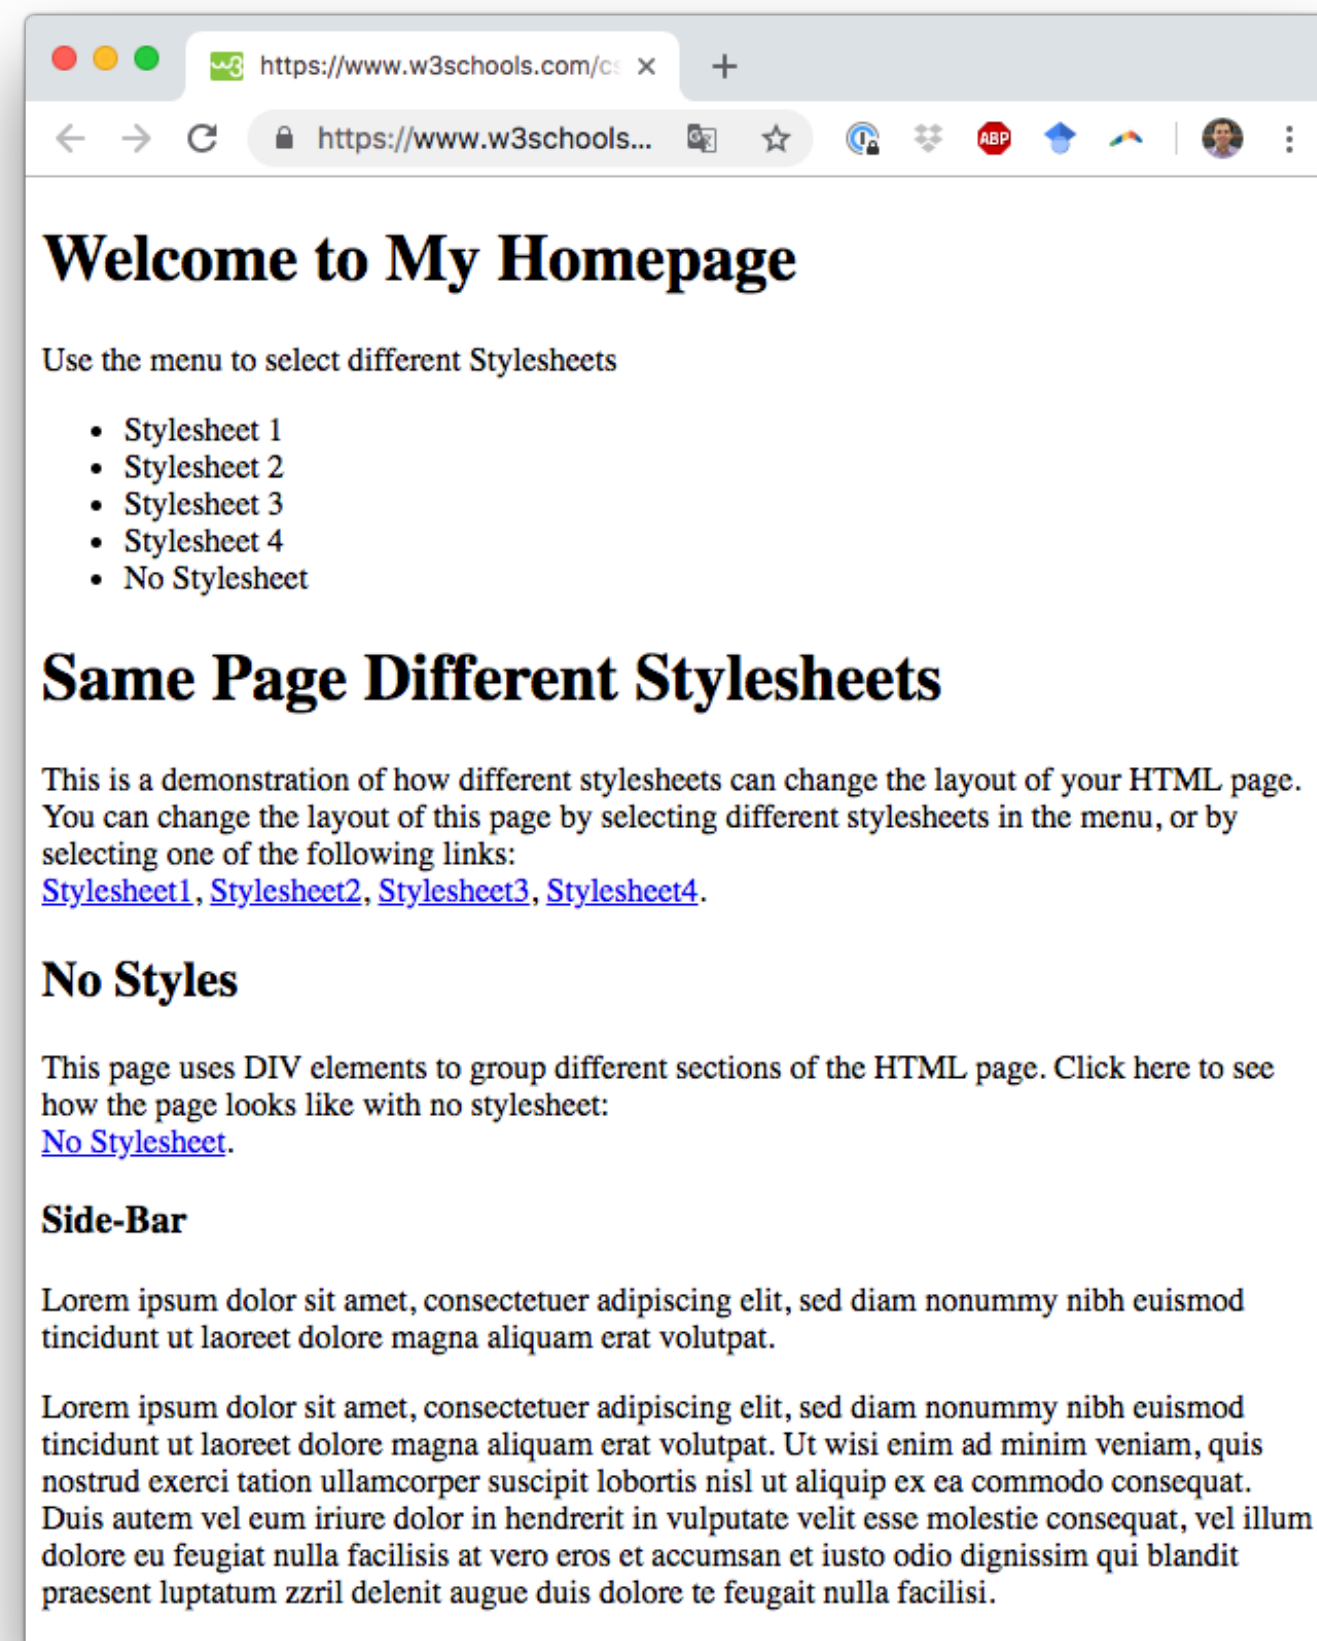

https://www.w3schools.com/css/demo_default.htm

Today's goals

By the end of today, you should be able to...

- Explain the goals of CSS and why it exists as separate from HTML
- Describe the CSS hierarchy and fallback structure
- Utilize the box model and positioning options to arrange content
- Style nested tags with child, adjacent sibling, and general sibling selectors
- Debug CSS in the browser and find additional resources online

CSS

Cascading Style Sheets

- Defines rules for styling
- Differs from HTML, which provides structure for the document

CSS: but why?

- Reusability
 - Apply the same style to multiple web pages
- Modularity
 - Include multiple stylesheets that apply to a single page
- Sane management
 - Files can be version controlled, separate from HTML structural content
- Maintainability
 - Easier to find a page's style

Ok, so how do I write CSS?

CSS syntax

- Selectors specify which elements a **rule** applies to
- Rules specify what *values* to assign to different formatting **properties**

/ CSS Pseudocode */*

```
selector {  
  property: value;  
  property: value;  
  ...  
}
```

 One rule, many properties

CSS syntax

```
h1 { ← Apply to all h1 tags
  font-family: 'Arial'; ← "font"
  color: blue;
  background-color: #ff0000; /*red*/
}
```

- Link to stylesheets in HTML's <head>

<head>

```
<link rel="stylesheet" href="my-style.css">
```

</head>



relation between
this page and reference



no content,
so no closing tag

Element, ID, and Class selectors

- element: what tag is being styled

```
p {  
  font-family: 'Arial';  
  color: red;  
}
```

- class: a type of element

```
.emphasize {  
  font-family: 'Arial';  
  color: red;  
}
```

- id: one specific element

```
#redtext {  
  font-family: 'Arial';  
  color: red;  
}
```


HTML Class and ID attributes

```
<div class="widget foo" id="baz"></div>
```

- Variable-value just like any other attribute (`href`, `src`)
- An element can have many classes, only one ID
- Each page can have only one element with a given ID
 - Required to pass validation
- Can use the same class on multiple elements
 - And should; it's useful to apply the same style to many elements

<https://css-tricks.com/the-difference-between-id-and-class/>


HTML Class and ID attributes

```
<div class="widget foo" id="baz"></div>
```

```
div.widget.foo#baz {  
  /*can chain selectors together!*/  
}
```

HTML Class and ID attributes

- Fun trick: IDs can be used for navigation
- `http://example.com/#id`

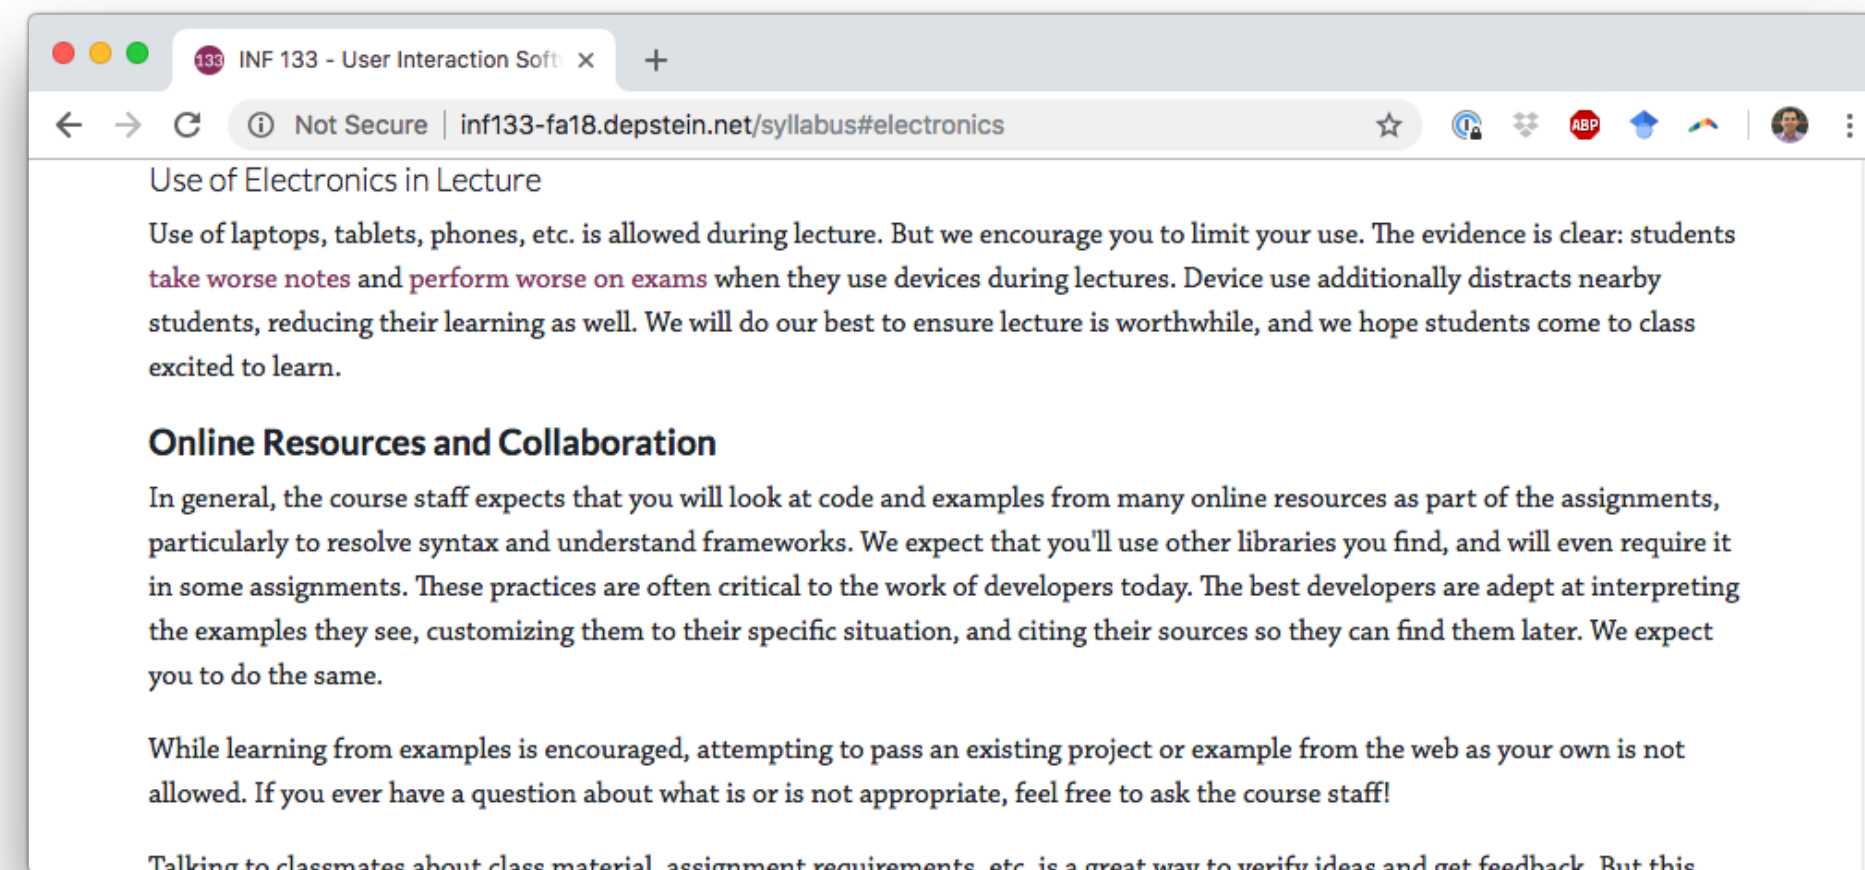

<https://css-tricks.com/the-difference-between-id-and-class/>

CSS properties

- `font-family`: the “font” (fallback alternatives separated by commas)
- `font-size`: the size of the text
- `font-weight`: **boldness**
- `color`: **text color**
- `background-color` (**element’s background**)
- `opacity` (**transparency**)
- And much, much more!

<http://www.w3schools.com/cssref/default.asp>

HTML vs. CSS

- HTML specifies the *semantics*
- CSS specifies the *appearance*

HTML vs. CSS

```
<!--HTML-->
```

```
<p> This text is  
<i>emphasized!</i></p>
```




Conflates appearance
and semantics

```
<!--HTML-->
```

```
<p> This text is  
<em>emphasized!</em></p>
```



Says nothing
about appearance

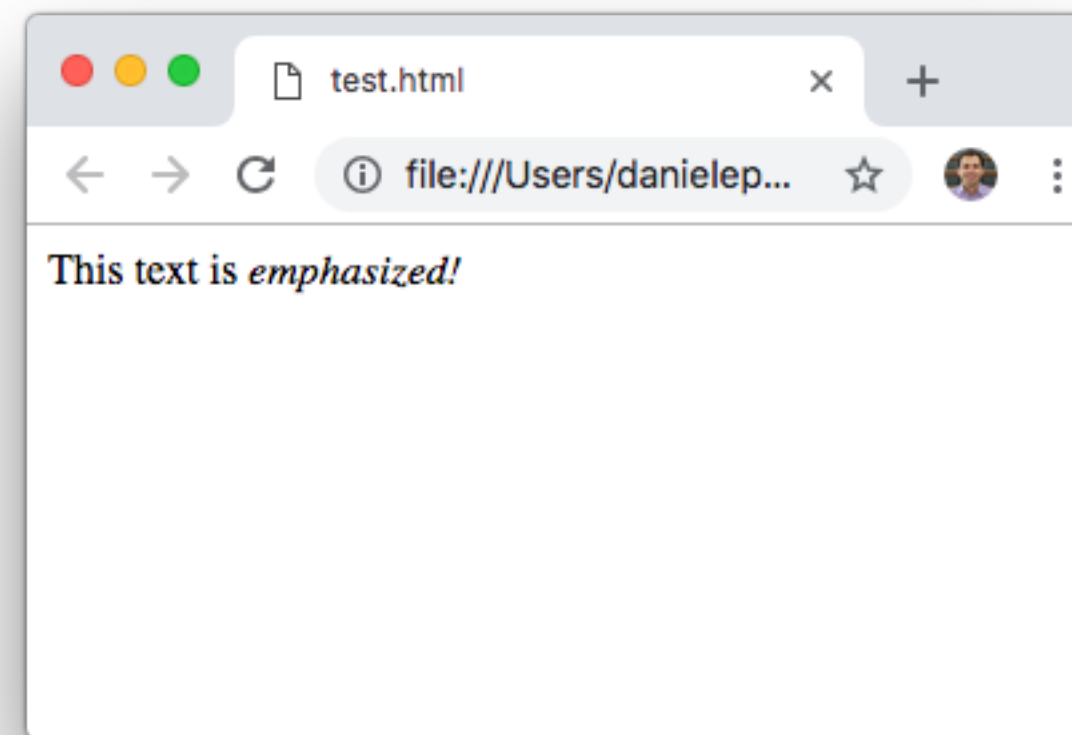


Question 📱

Which CSS renders

```
<p class="para">
ZOT!
ZOT!
<em id="zot">ZOT!</em>
</p>
```

as

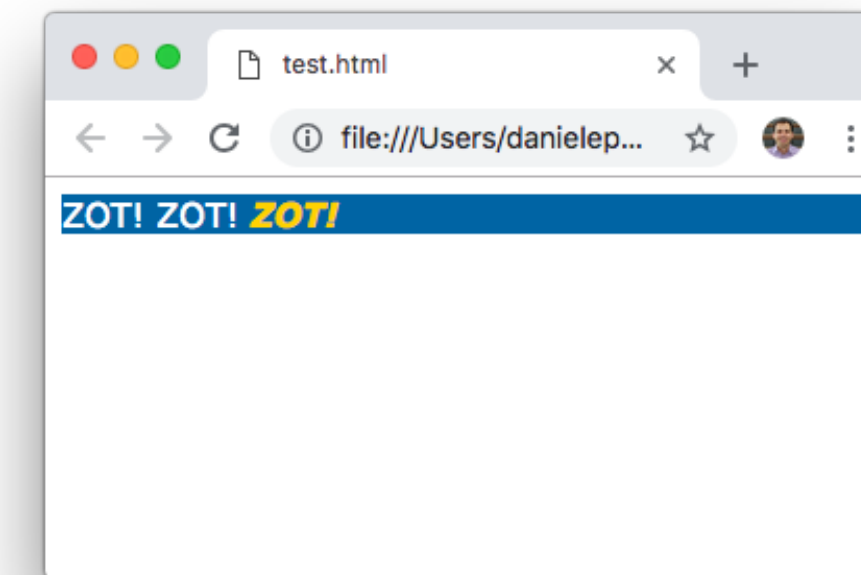

?

A

```
p {
  font-family: 'Verdana';
  color: #0064a4; /*Blue*/
  background-color: white;
}
#em {
  color: #ffd200; /*Yellow*/

  font-weight: 700; /*Bold*/
}
```

B

```
.para {
  font-family: 'Verdana';
  background-color: #0064a4; /*Blue*/
  color: white;
}
zot {
  color: #ffd200; /*Yellow*/
  font-style: italic;
  font-weight: 700; /*Bold*/
}
```

C

```
.para {
  font-family: 'Verdana';
  background-color: #0064a4; /*Blue*/
  color: white;
}
em {
  color: #ffd200; /*Yellow*/

  font-weight: 700; /*Bold*/
}
```

D

```
#para {
  font-family: 'Verdana';
  background-color: #0064a4; /*Blue*/
  color: white;
}
.em {
  color: #ffd200; /*Yellow*/
  font-style: italic;
  font-weight: 700; /*Bold*/
}
```

E

```
.para {
  font-family: 'Verdana';
  background-color: #0064a4; /*Blue*/
  color: #ffd200; /*Yellow*/
}
#zot {
  color: white;
  font-style: italic;
  font-weight: 700; /*Bold*/
}
```

Cascading Style Sheets

- Multiple rules can apply to the same element (in a “cascade”)

```
<!--HTML-->
```

```
<p class="big blue">
```

This tag has two classes: "big" and "blue"
(classes are separated by spaces)

```
</p>
```

```
/* CSS */
```

p { font-family: 'Verdana'; }	←	Apply to all <p> tags
.big { font-size: larger; }	←	Apply to all with class="big"
.blue { color: blue; }	←	Apply to all with class="blue"

Cascading Style Sheets

- CSS rules are also inherited from parent tags

```
<div class="content"> <!-- has own styling -->
  <div class="sub-div"> <!-- has own styling + .content styling -->
    <ol class="my-list"> <!-- own styling + .sub-div + .content -->
      <!-- own style is ol AND .my-list rules-->
      <!-- li styling + .my-list + .sub-div + .content -->
      <li>Item 1</li>
      <li>Item 2</li>
      <li>Item 3</li>
    </ol>
  </div>
</div>
```

Cascading Style Sheets

- Rules are applied in order (last rule always wins among peer selectors)

```
<!--HTML-->
```

```
<p class="red green">
```

```
  <em class="blue">Text is blue!</em>
```

```
</p>
```

```
/* CSS */
```

```
p { font-family: 'Verdana'; }
```

```
.red { color: red; }
```

```
.green { color: green; }
```

```
.blue { color: blue; }
```

Specifying styles

Inline Styling

```
<p style="font-family='Arial'; color=red;">
```

Red text

```
</p>
```

```
<p style="font-family='Arial'; color=red;">
```

More red text

```
</p>
```

- Supported, but usually bad practice
 - Goes against DRY principles of programming (Don't Repeat Yourself)

Specifying styles

Internal Styling

```
<head>
  <style type="text/css">
    p {font-family: 'Arial'; color:red;}
  </style>
</head>
<body>
  ...
</body>
```

- Just putting CSS into the `<head>` of your HTML

Specifying styles

External Styling

```
<head>  
  <link rel="stylesheet" href="./css/style.css">  
</head>  
<body>  
  ...  
</body>
```

- Generally a best practice
 - Aligns with the idea of separating structure from style

Specifying styles

- External styles apply in order, too!

```
<head>
```

```
  <link rel="stylesheet"  
    href="/css/bootstrap.css">
```


```
  <link rel="stylesheet"  
    href="/css/style.css">
```

```
</head>
```

```
<body>
```


```
  <h1>Hello, World!</h1>
```

```
</body>
```

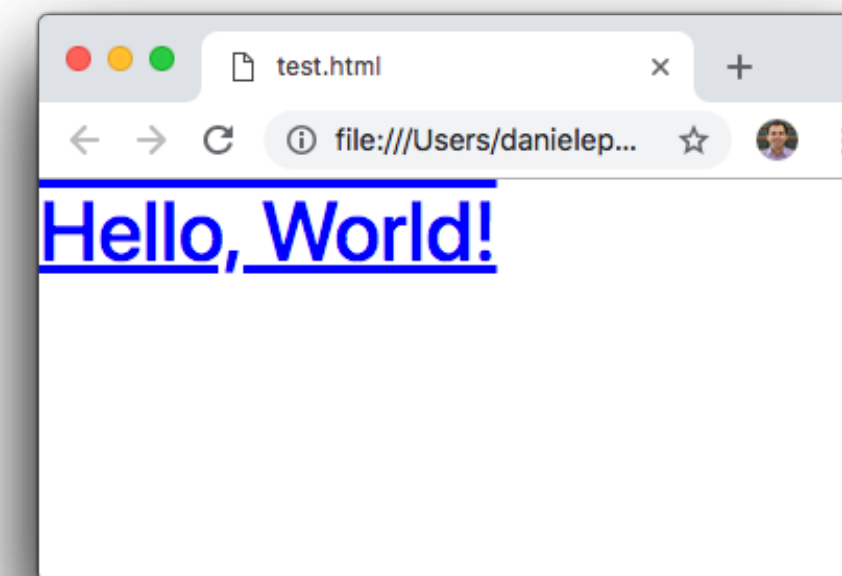


Specifying styles

- CSS specificity is *calculated* based on which selector designates it
- General rule: rule that's “closer to the HTML element” applies
- This is difficult stuff, usually trial-and-error resolves most things

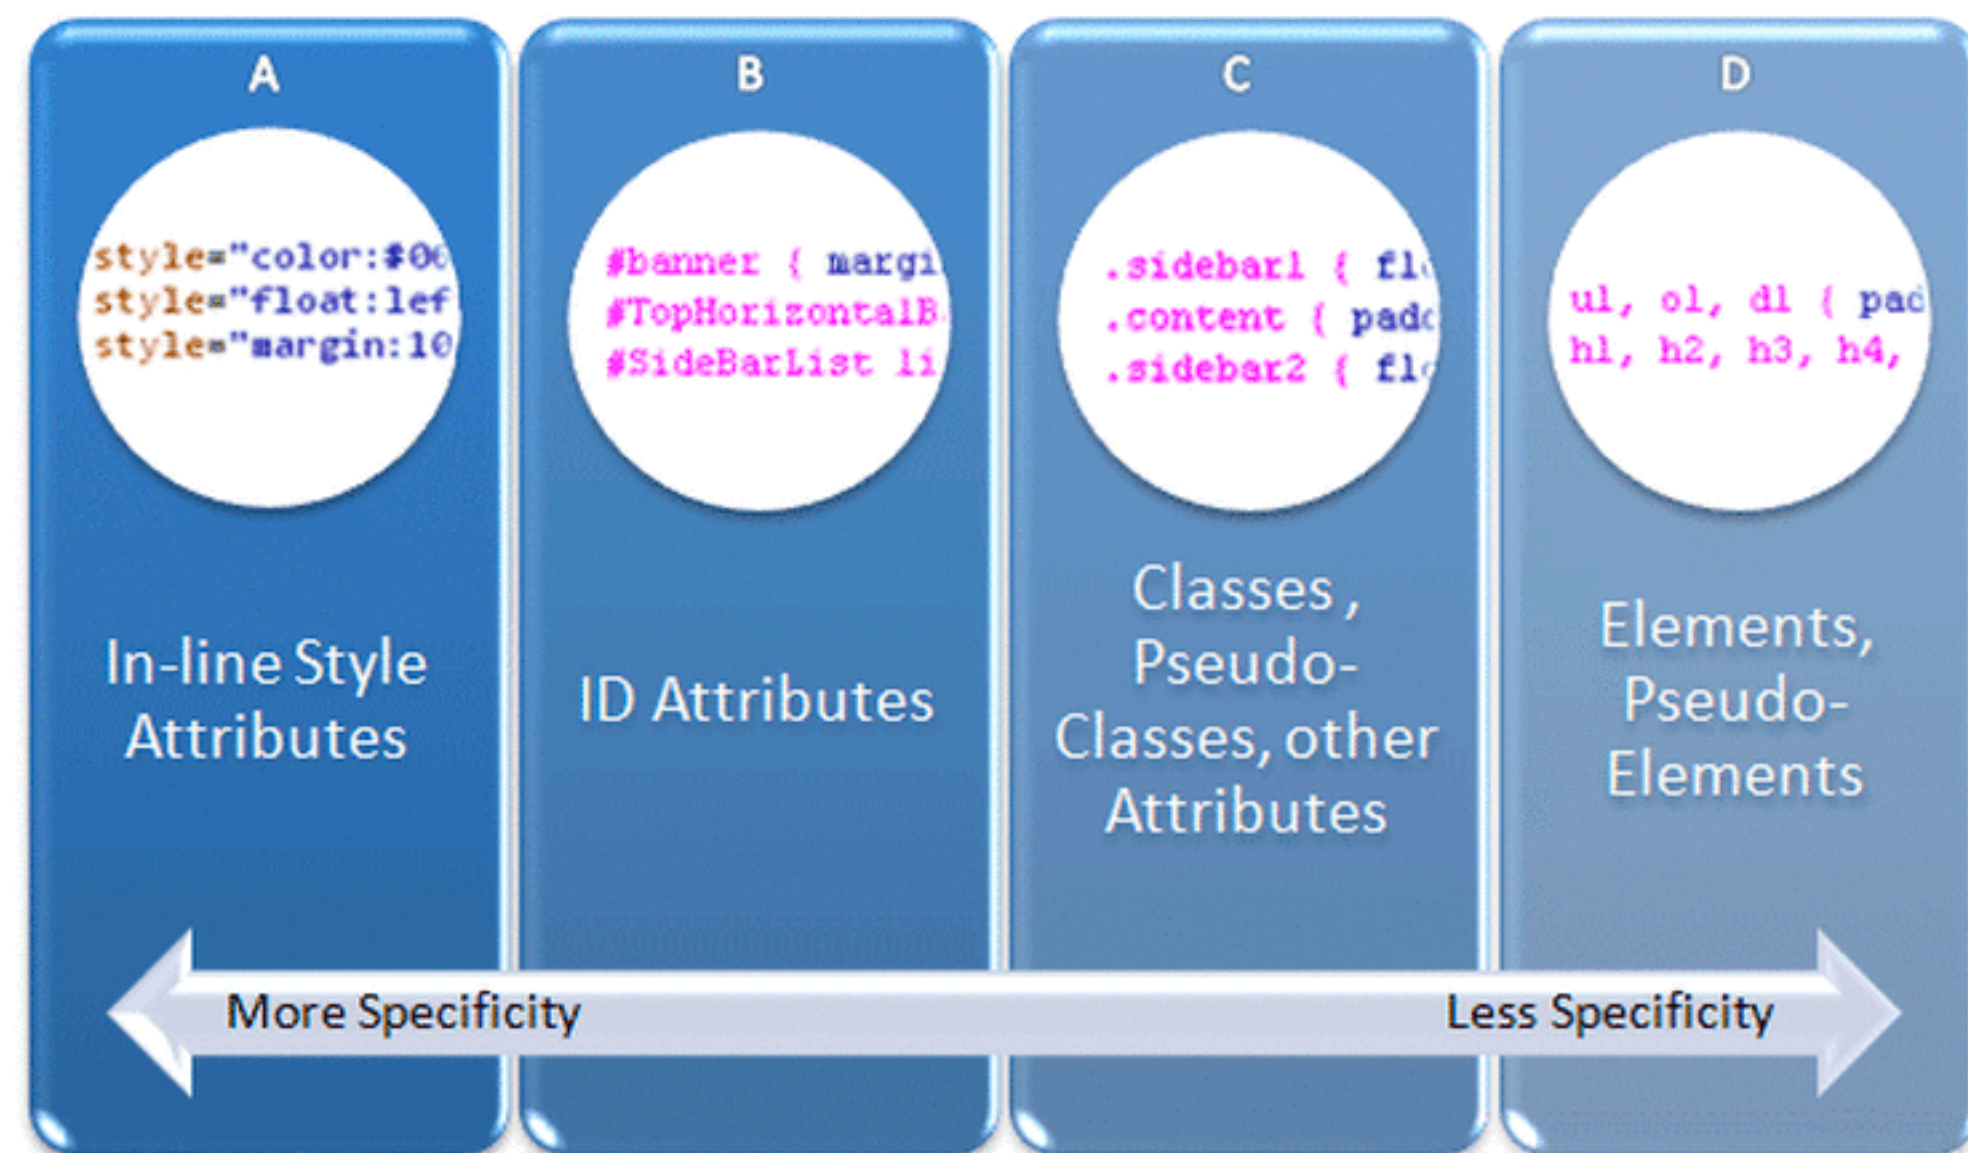

Our progress so far...

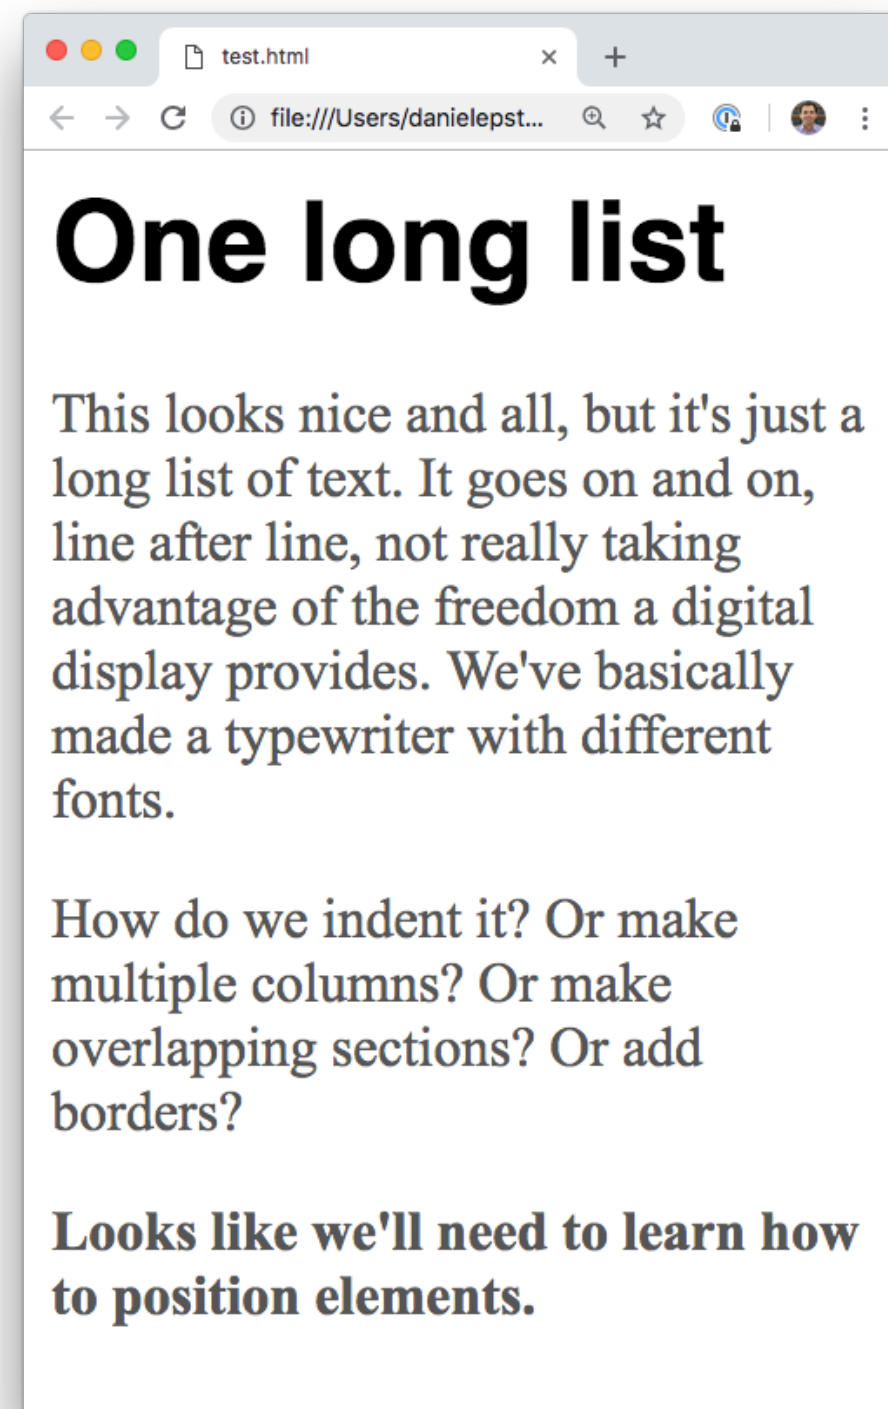

Positioning

- HTML tags are either*:
 - Block elements (line break after them)
 - Inline elements (no line break)

`<p>`  Block

This is on a line.

``This is on the same line.``  Inline


`</p>`

`<p>`This will be on a new line.`</p>`

- Don't put block elements inside inline elements!


Positioning: box model

- Content contains “real” content
- Padding extends content area
- Border is similar
- Margin is intended to separate elements from neighbors

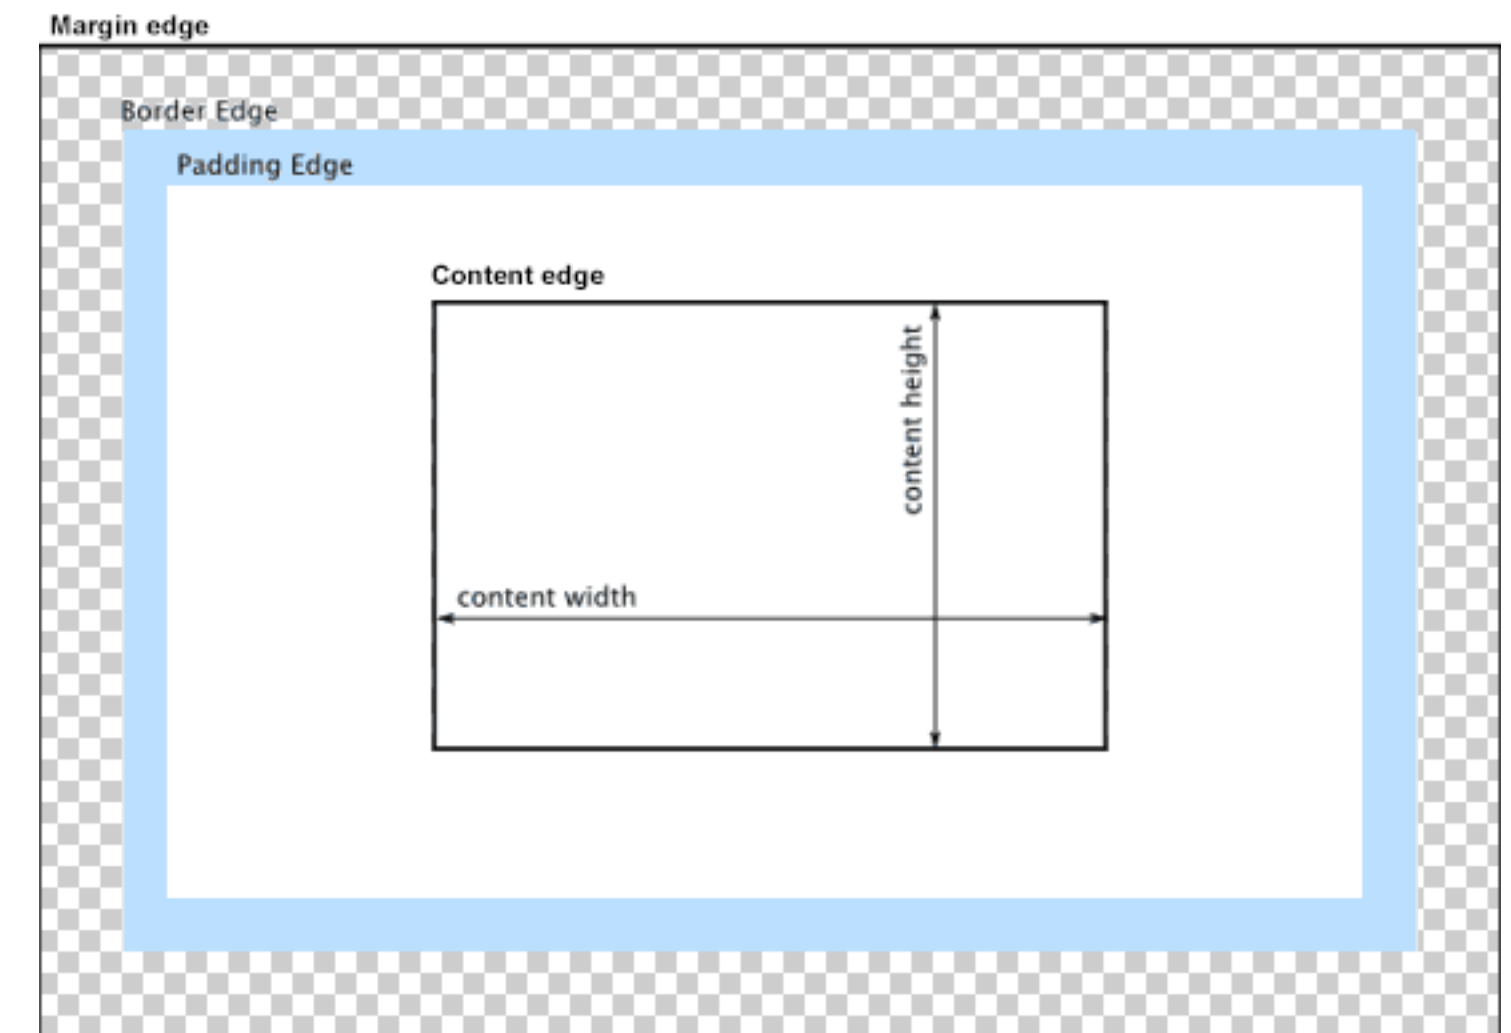



Positioning: box model

- Content dimensions are specified with `width` and `height`
- `padding`, `border`, and `margin` have direction properties (e.g., `padding-top`, `margin-right`, `border-left`)
- `border` can have `border-color`, `border-width`, and `border-style`
- Content color (e.g., `background-color`) extends into padding

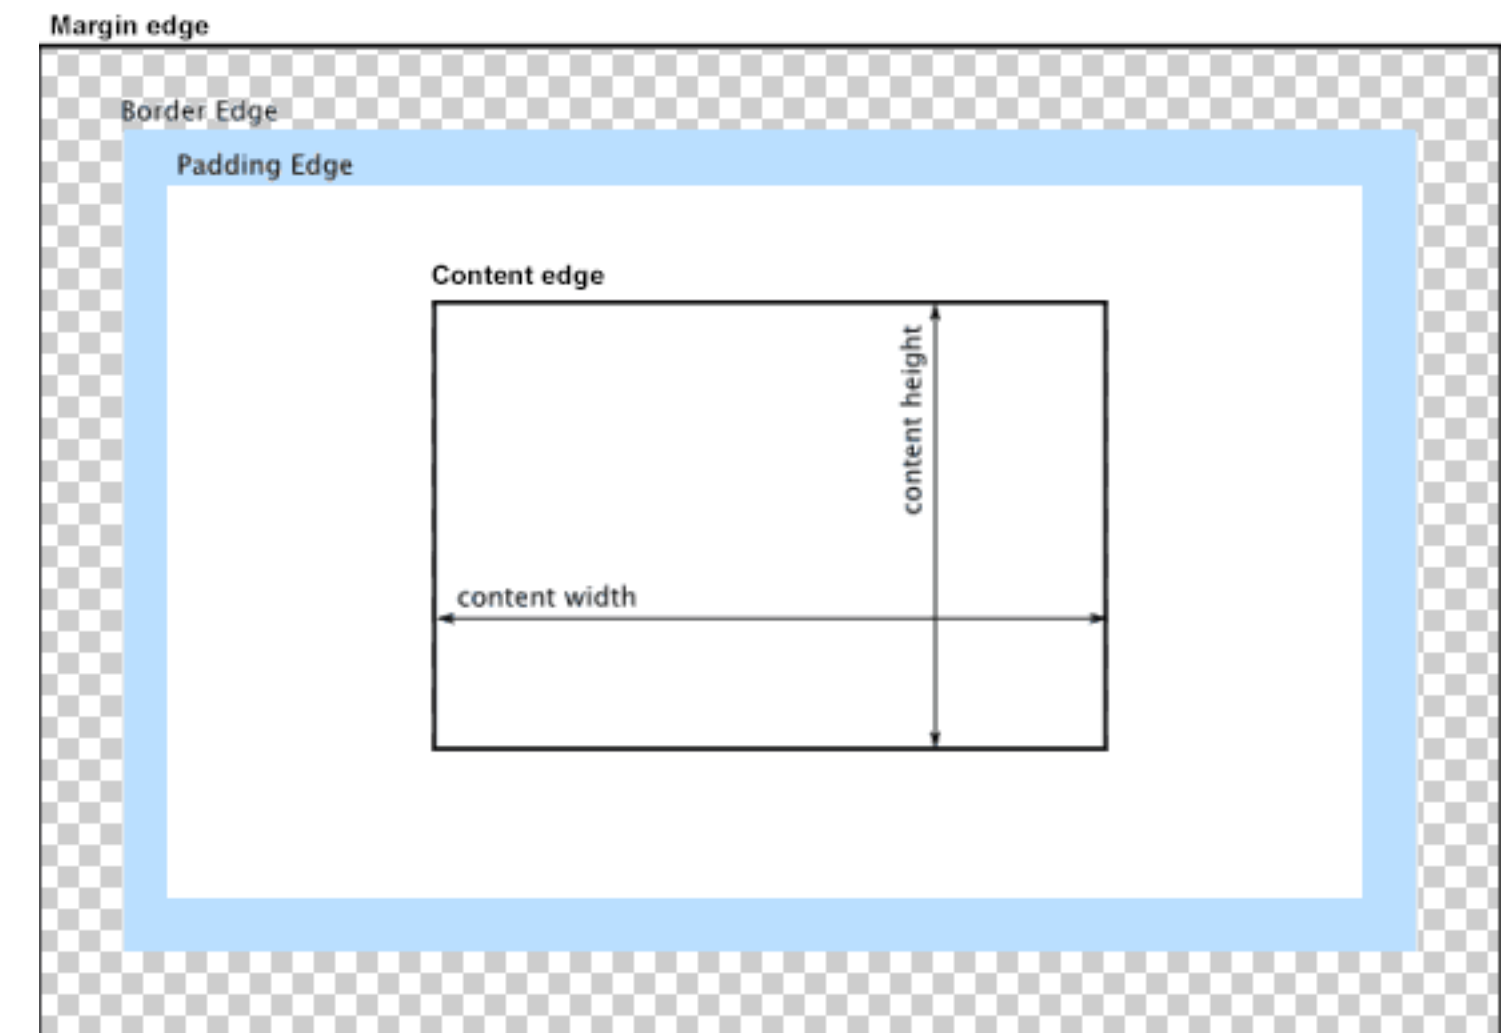

Positioning: shorthand

- Multiple values can be specified in one line
- Difficult to remember
- Being explicit improves readability at the expense of brevity

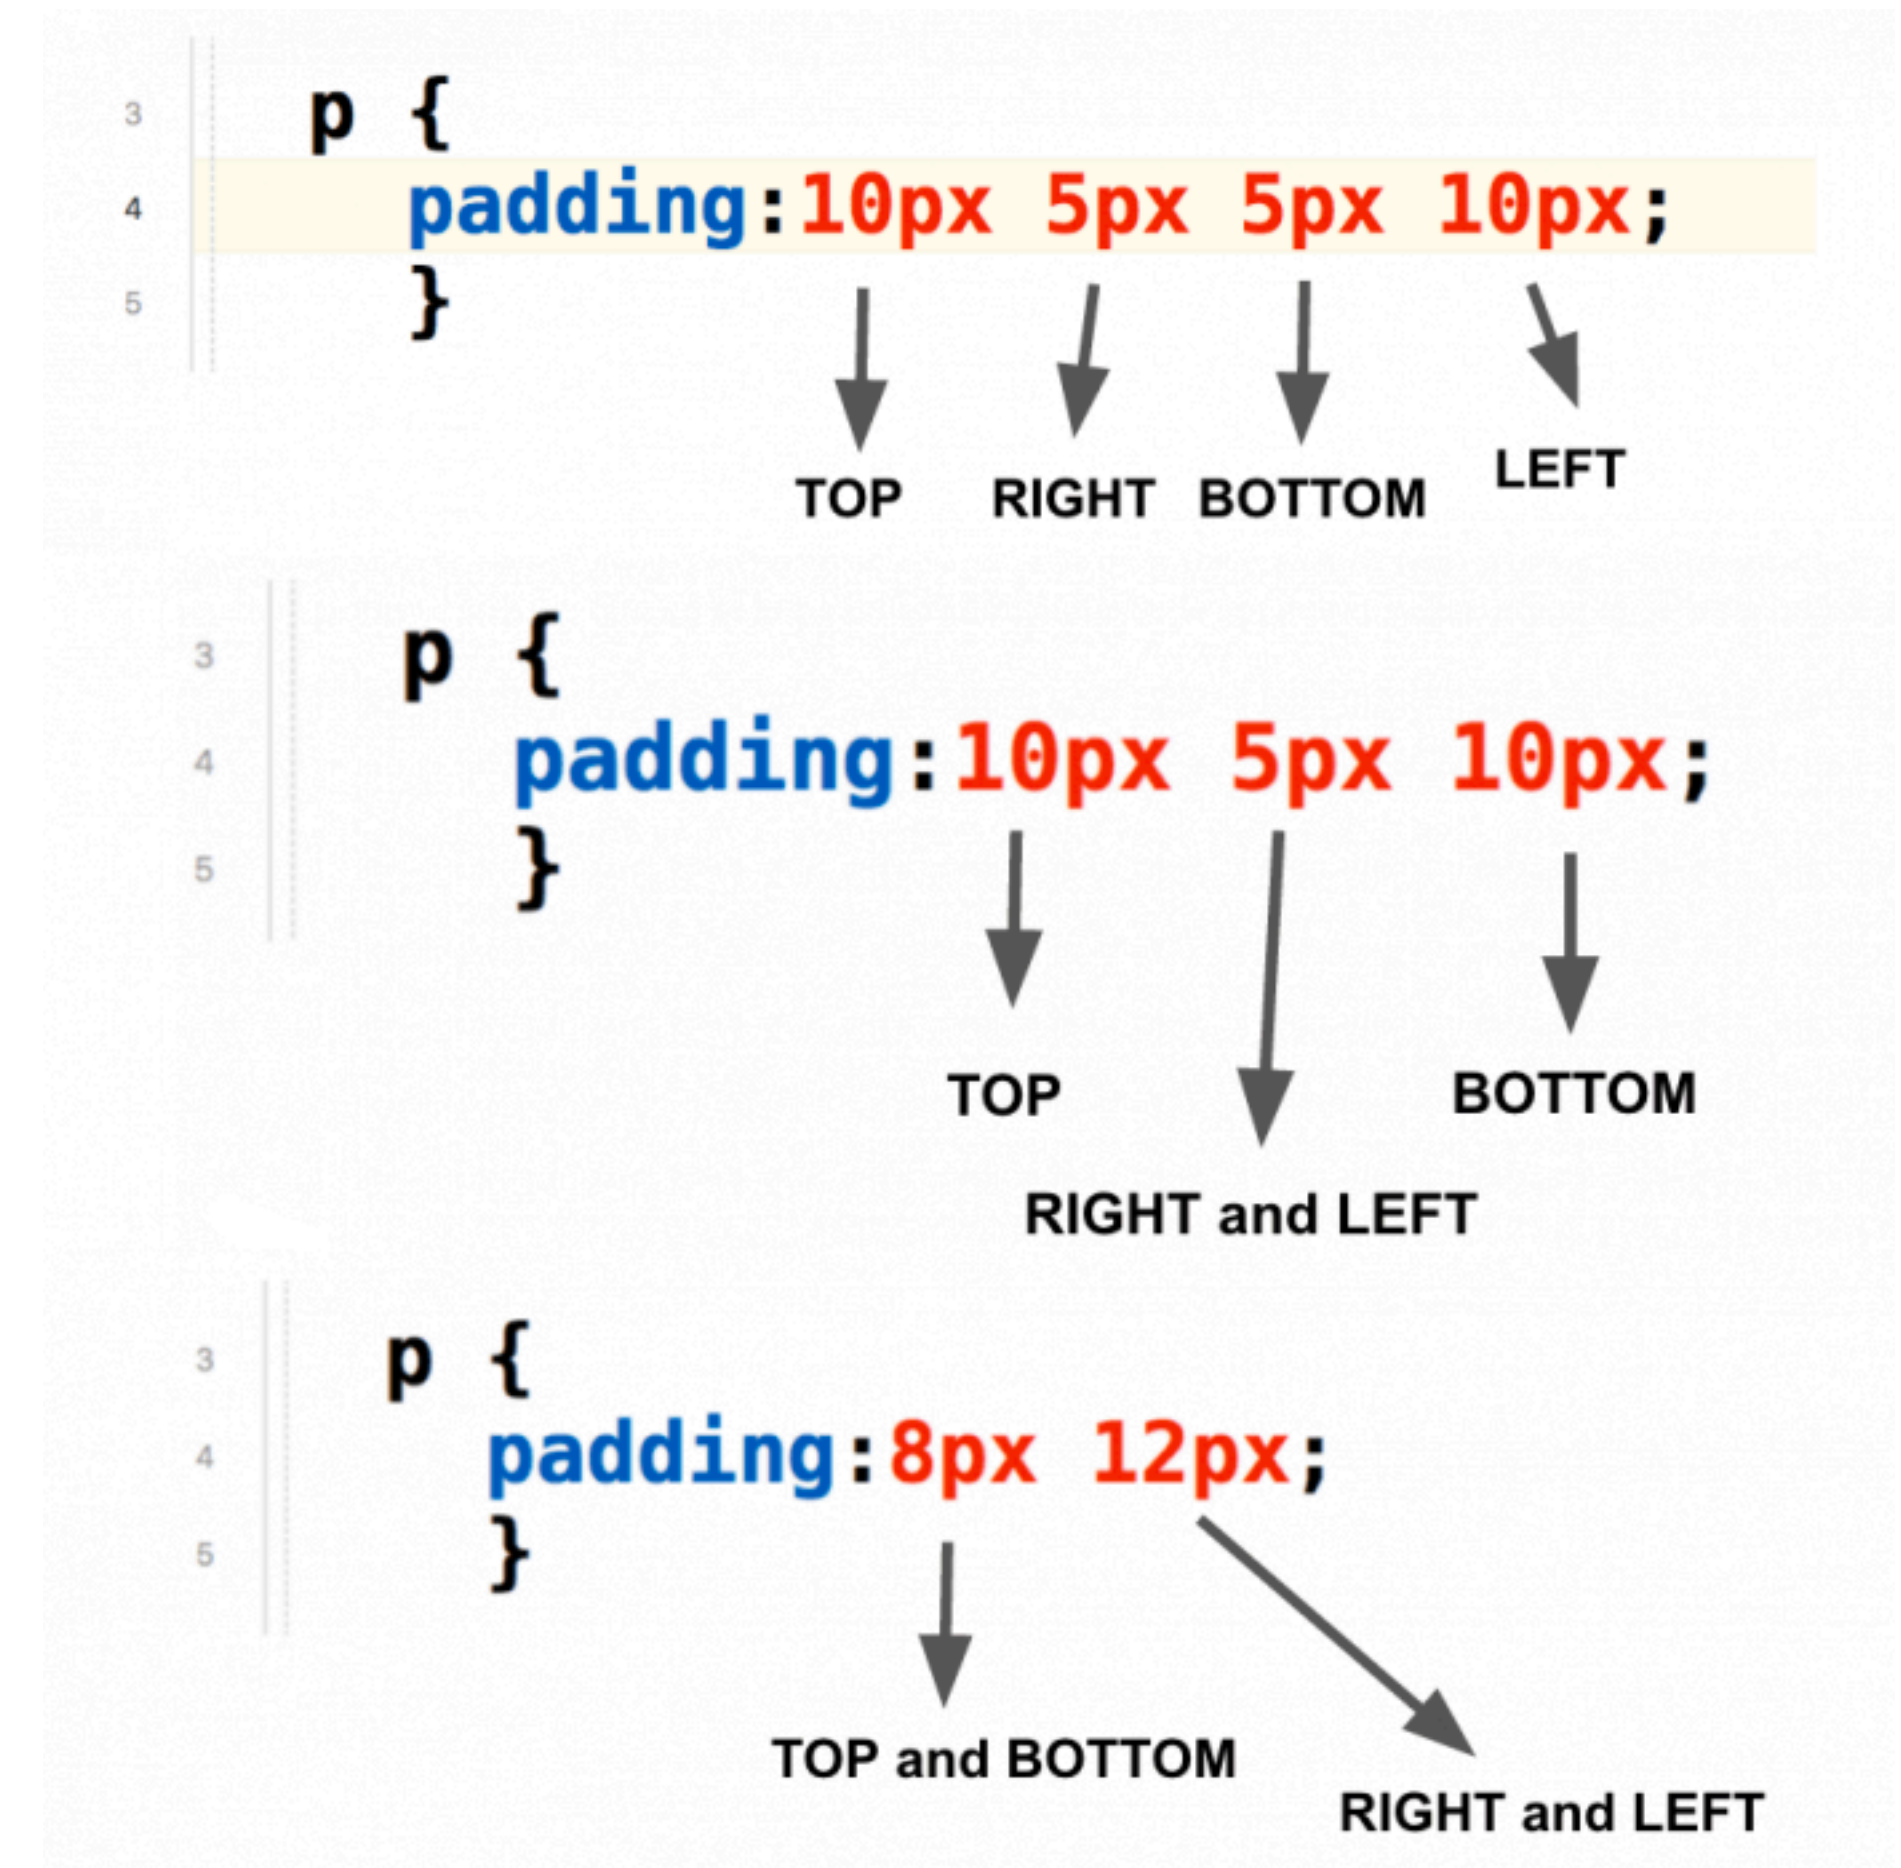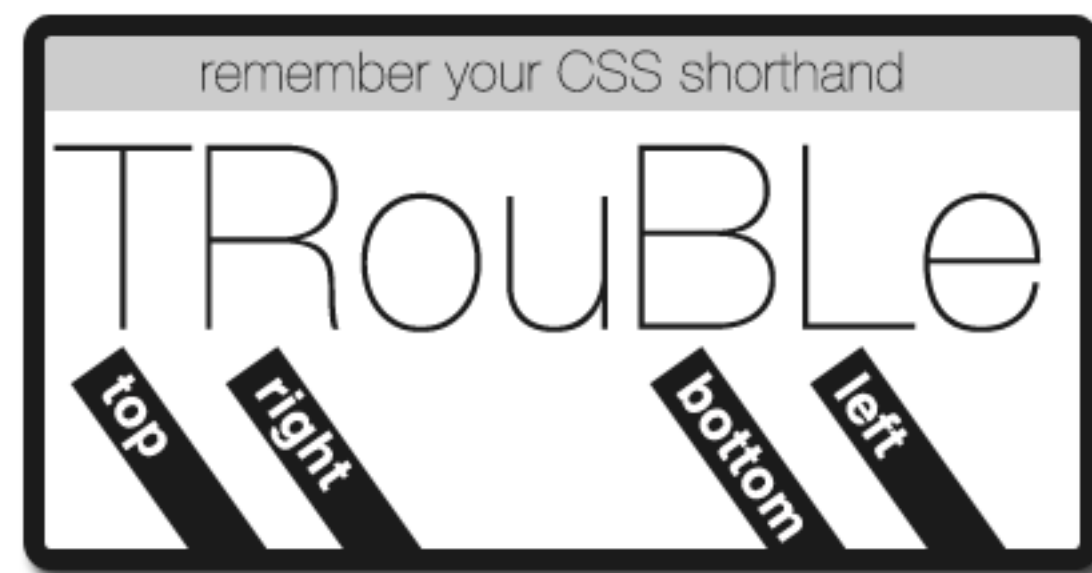


<https://css-tricks.com/remember-the-order-of-marginpadding-shorthand-with-trouble/>

Borders: shorthand

- Multiple values can be specified in one line
- Slightly easier to remember
- Maybe even more readable

```
div {  
    border-bottom-width: 3px;  
    border-bottom-style: solid;  
    border-bottom-color: red;  
}  
  
div.equivalent {  
    border-bottom: 3px solid red;  
}
```

Positioning: types

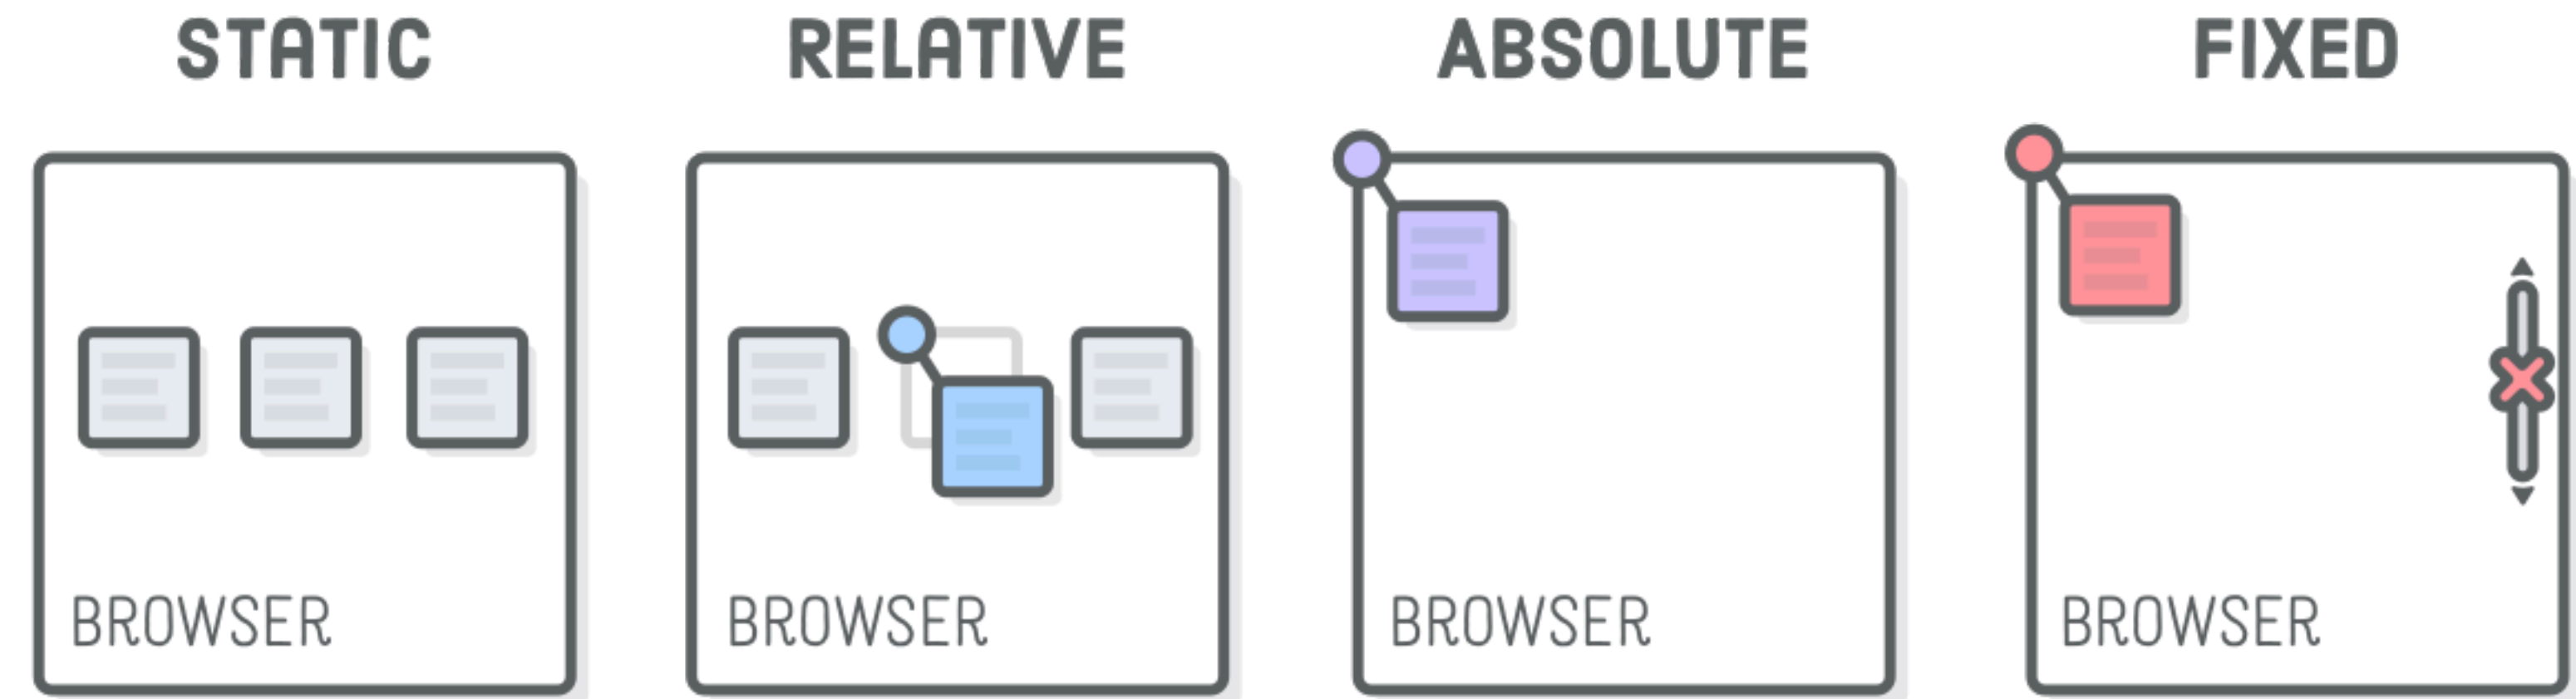

- `static` (default)
- `relative` (offset from default)
- `absolute` (from top-left)
- `fixed` (absolute + floating)


<https://internetingishard.com/html-and-css/advanced-positioning/>

Positioning: types

- `static` and `relative` follow the overall flow of a page
 - `relative` helps make adjustments to the flow
- `absolute` and `fixed` ignore it entirely
 - But they're helpful in some cases, like floating action buttons (FABs)




Relative position

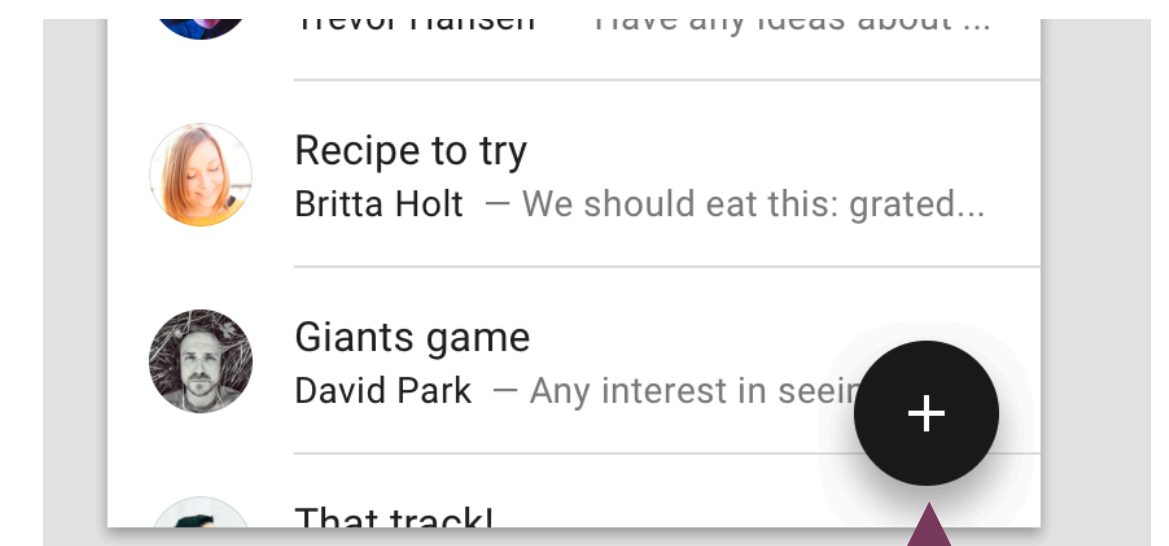

Absolute position

Positioning: types

- `sticky` will stop when a user scrolls past it
 - Useful for menus
 - Not all browsers support it, but getting there

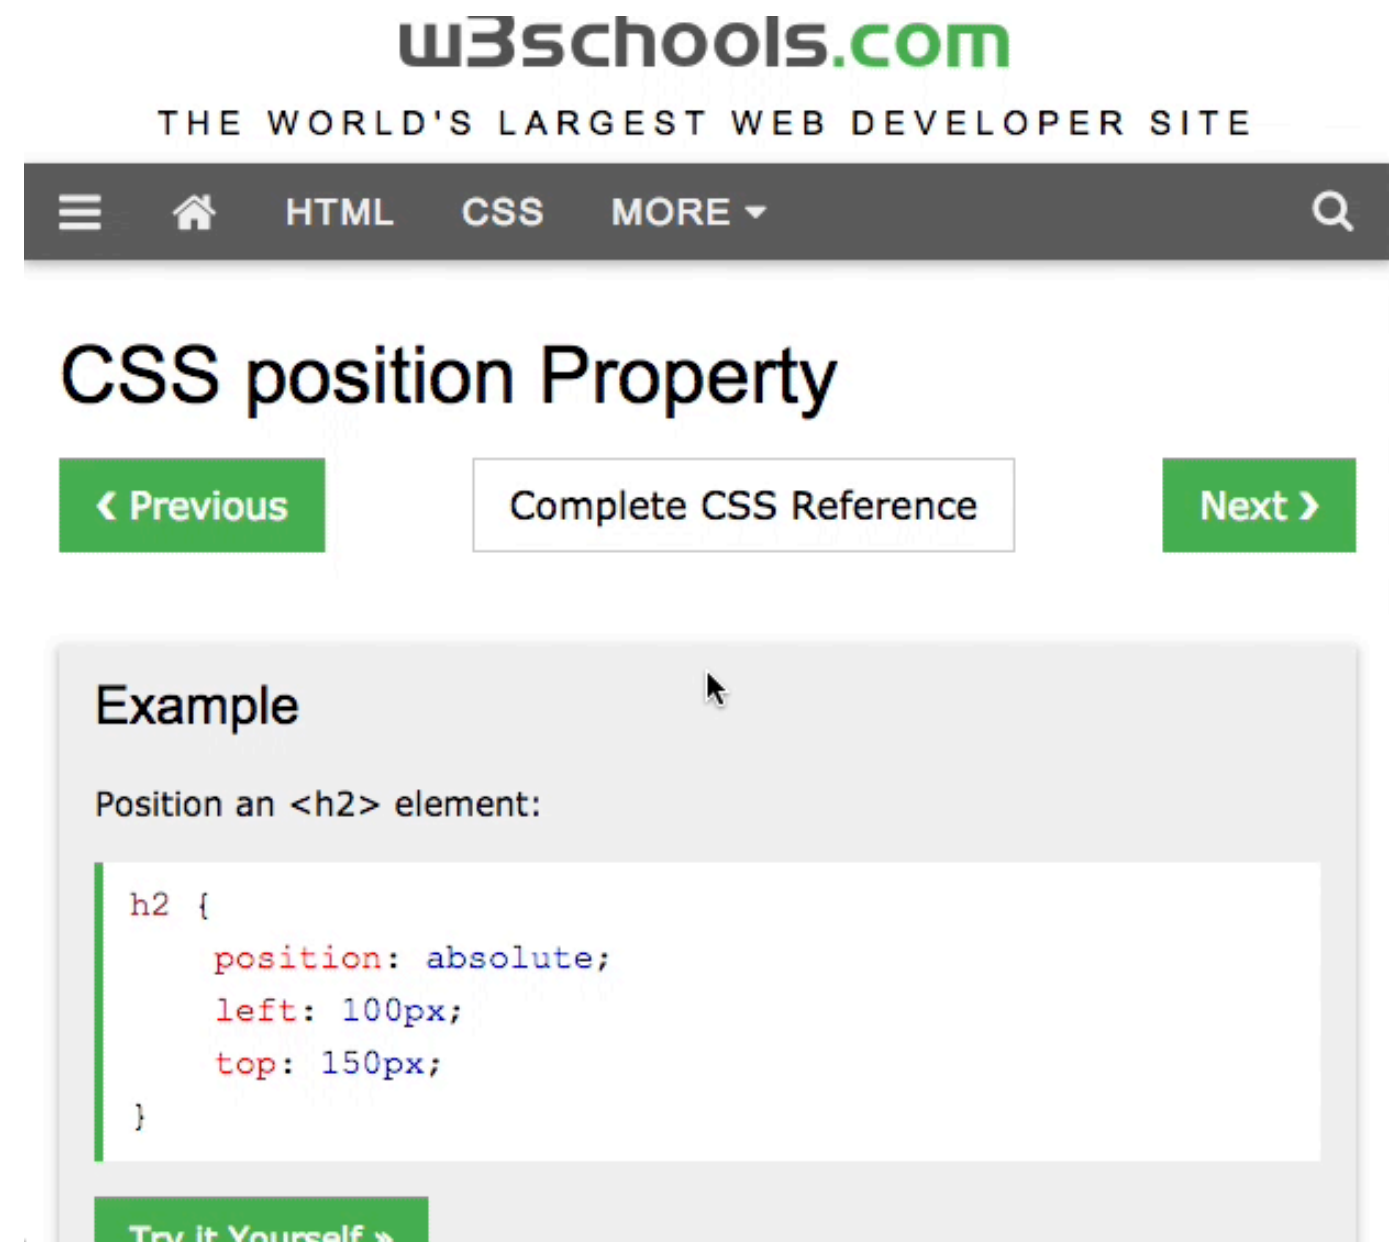


<https://css-tricks.com/examples/AbsoluteInsideRelative/>

Question

Which `p` style would generate this?

(assume `div` is correctly positioned and `px` numbers are the correct side)

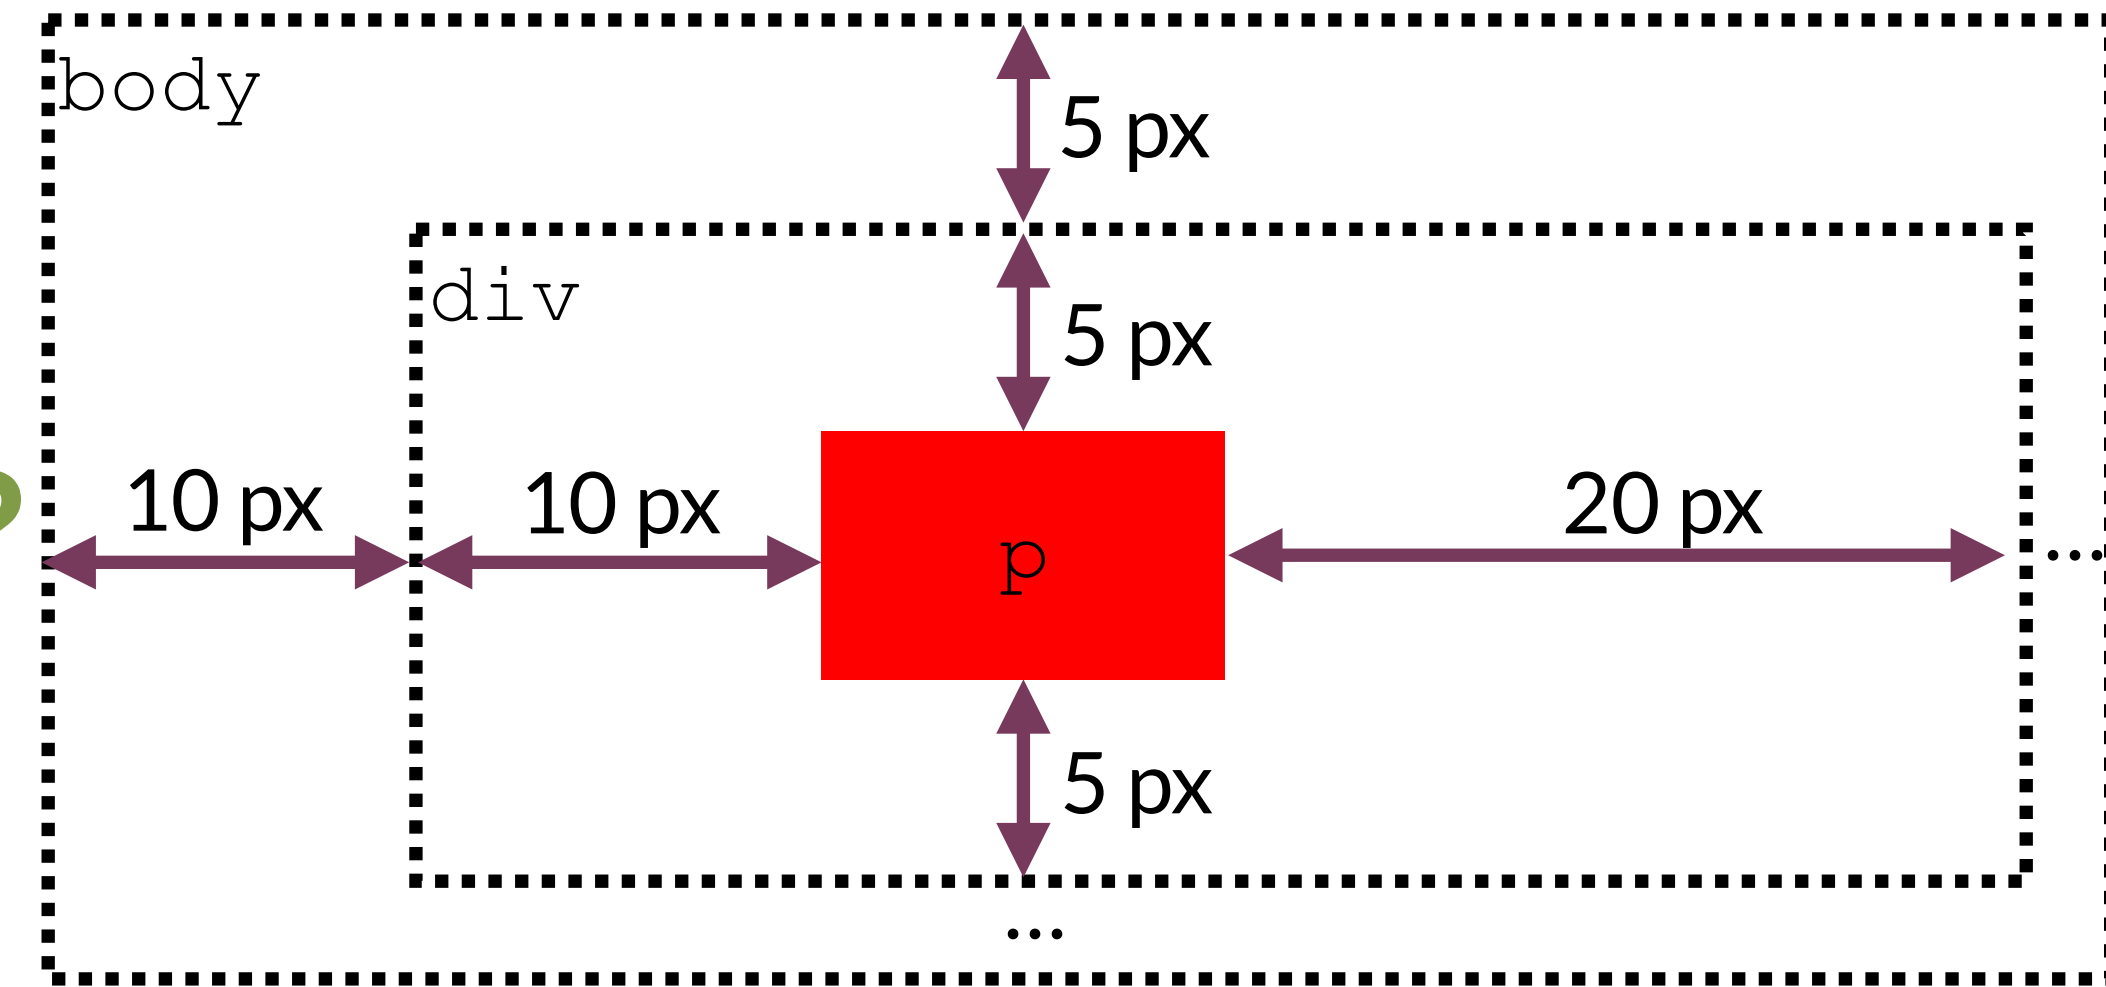

A `p` {
 `background-color`: red;
 `position`: absolute;
 `margin`: 5px 20px 5px 10px;
}

B `p` {
 `background-color`: red;
 `position`: relative;
 `top`: 10px;
 `left`: 20px;
 `bottom`: 5px;
 `right`: 20px;
}

C `p` {
 `background-color`: red;
 `position`: absolute;
 `top`: 10px;
 `left`: 20px;
 `bottom`: 5px;
 `right`: 20px;
}

D `p` {
 `background-color`: red;
 `position`: relative;
 `margin-top`: 5px;
 `margin-right`: 20px;
 `margin-bottom`: 5px;
 `margin-left`: 10px;
}

E `p` {
 `background-color`: red;
 `position`: relative;
 `padding`: 5px 20px 5px 10px;
}

Units

- Pixels (px), element units (em), percentages (%), real-world units (in, cm)
- Use relative units whenever possible
- Helps accessibility, people with low vision change default size (usually 16px)
 - Em fonts scale from the default, a 30px heading stays 30px
- Also useful to vary based on screen size
 - More on how to do that next lecture

	Recommended	Occasional use	Not recommended
Screen	em, px, %	ex	pt, cm, mm, in, pc
Print	em, cm, mm, in, pt, pc, %	px, ex	

Advanced selectors

- Extremely useful for making clean stylesheets
- Add a top margin for all `h2`s that follow a paragraph

```
p + h2 {  
  margin-top: 10px;  
}
```

- Or only in a particular `div`


```
div.post p + h2 {  
  margin-top: 10px;  
}
```

<https://www.smashingmagazine.com/2009/08/taming-advanced-css-selectors/>

Advanced selectors

Child and Descendant Selectors


- `ul li`
 - Select *all* children and grandchildren
- `ul > li`
 - Select *direct* children (not grandchildren)

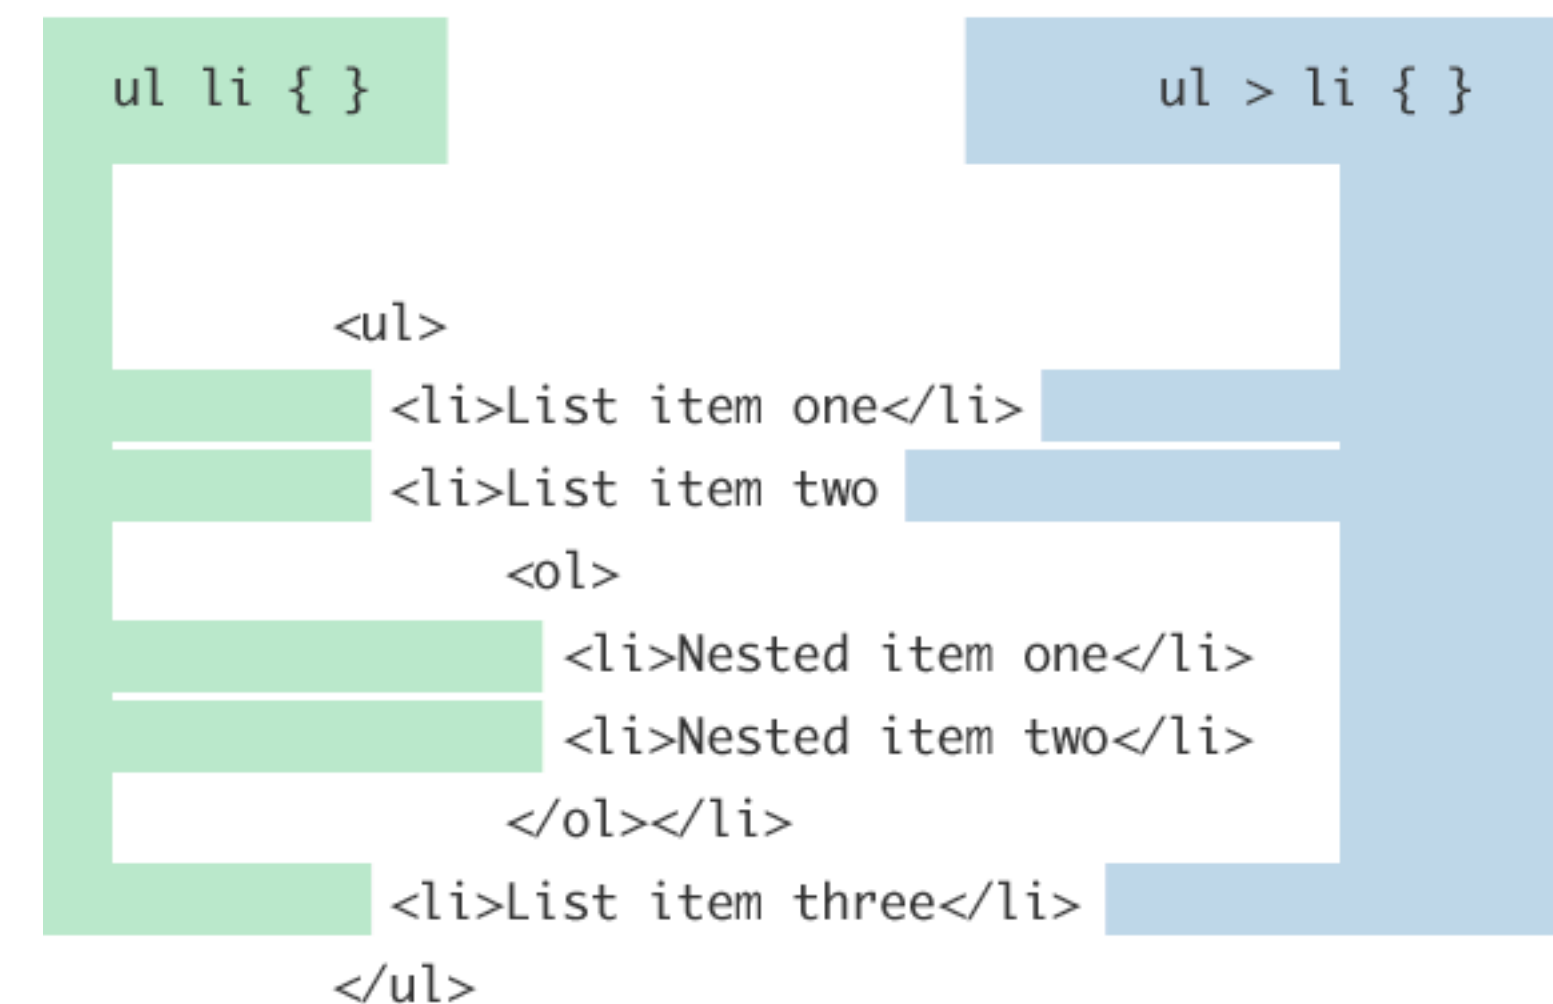

Advanced selectors

Adjacent Sibling Selectors


- `p + p`
- `div + p`
 - Target items immediately next to each other

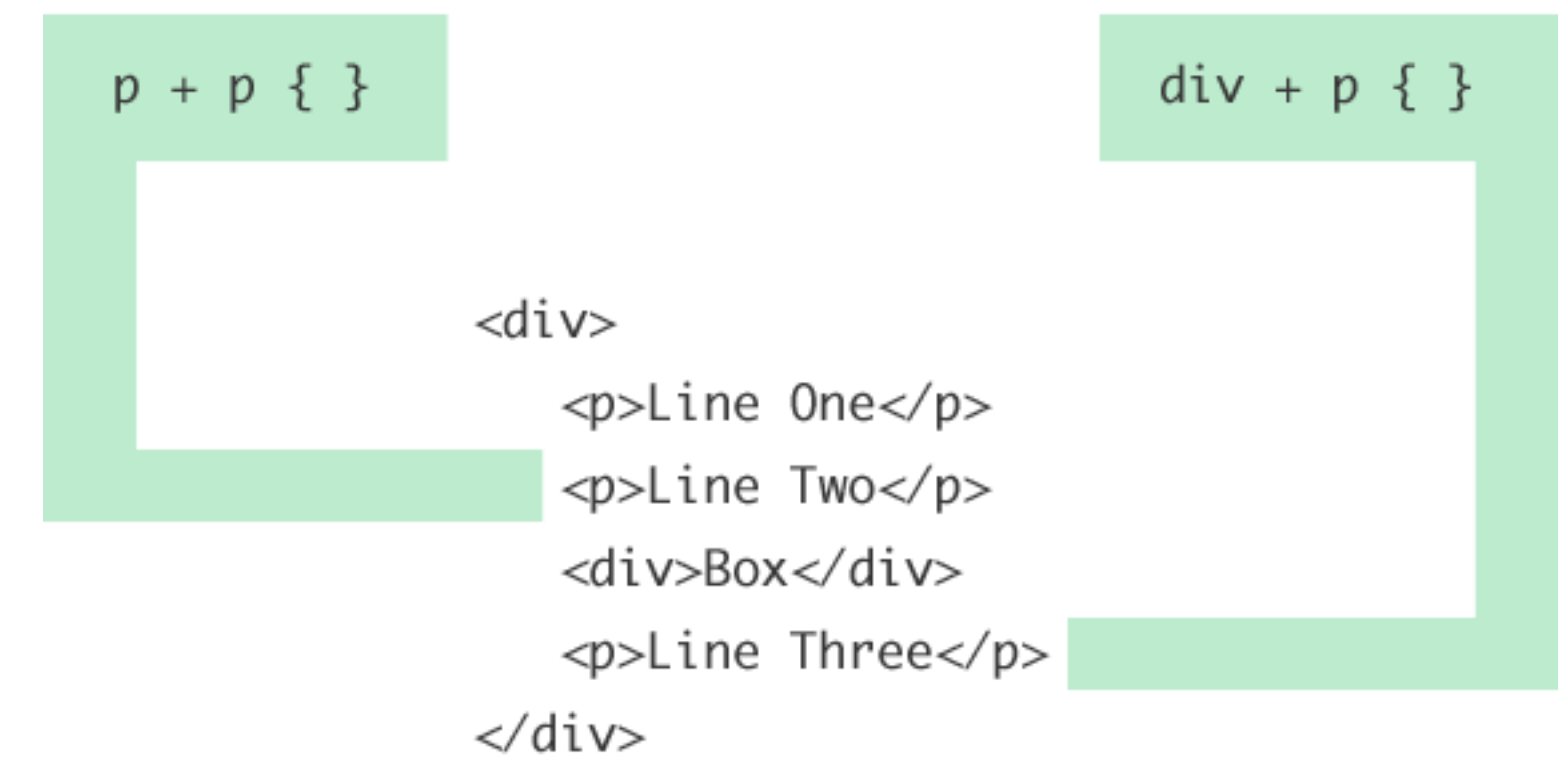

Advanced selectors

General Sibling Selectors

- `p ~ p`
- `div ~ p`
 - Target items anywhere after the sibling

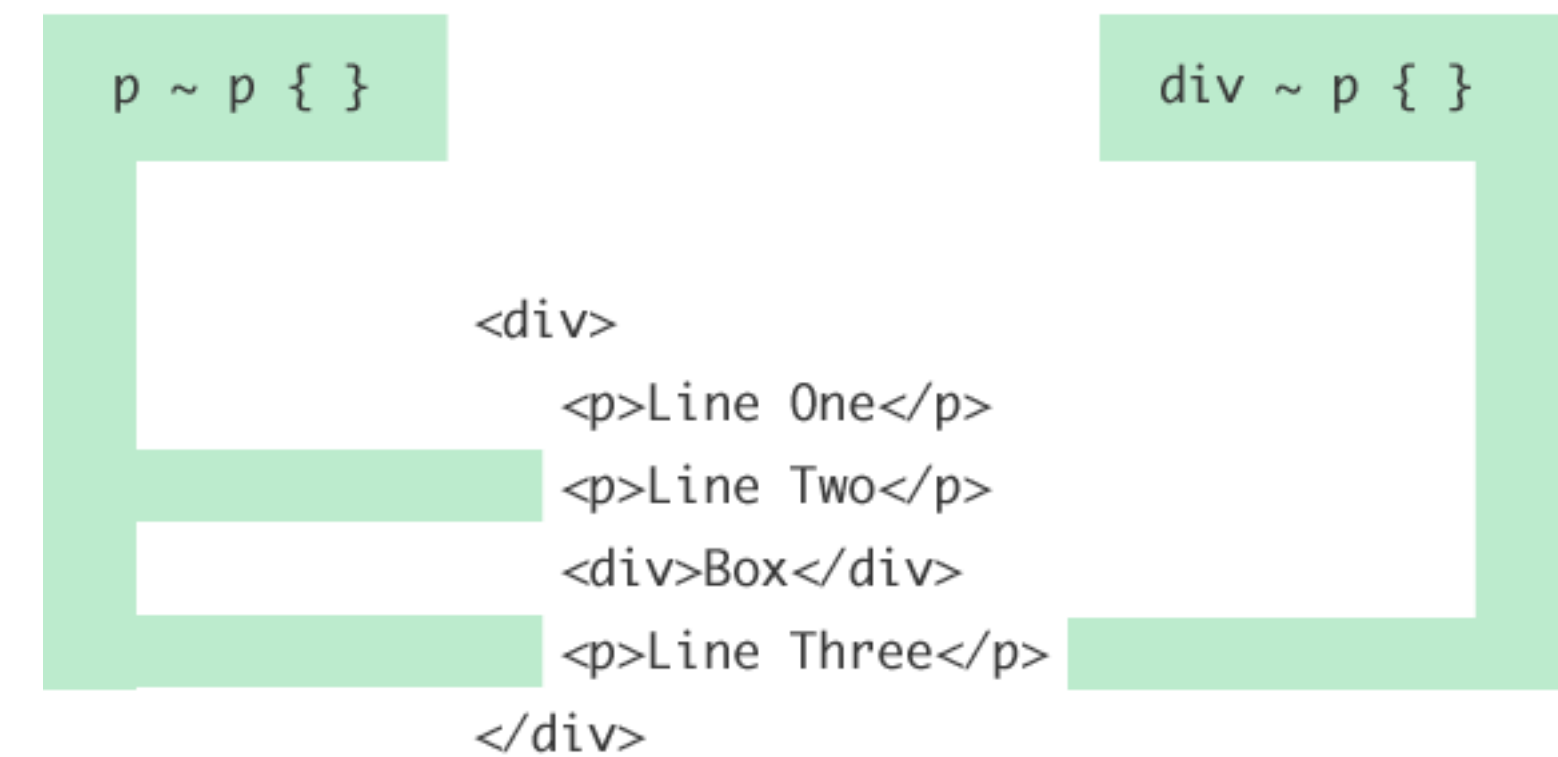

Pseudo-classes

- Define a special state of an element

```
/* CSS Pseudocode */
```

```
Selector:pseudo-class {  
  property: value;  
  property: value;  
  ...  
}
```

Pseudo-classes

```
a:link { /* unvisited link */  
    color: #FF0000;  
}
```

```
a:visited { /* visited link */  
    color: #00FF00;  
}
```

```
a:hover { /* mouse over link */  
    color: #FF00FF;  
}
```

```
a:active { /* selected link */  
    color: #0000FF;  
}
```

← hover must be after
link and visited

← active must be after hover

https://www.w3schools.com/Css/css_pseudo_classes.asp

Fonts & fallbacks

- Browsers will try fonts in order

```
p {  
    font-family: "Times New Roman", Times, serif;  
}
```

- Google Fonts is a great resource

```
<!--HTML-->  
<link href="https://fonts.googleapis.com/css?  
family=Roboto" rel="stylesheet">  
/* CSS */  
font-family: 'Roboto', sans-serif;
```

<https://fonts.google.com/>

Fallbacks in HTML

- Work similarly to CSS

```
<video autoplay>
```

```
  <!--webm not supported in IE or Safari-->
```

```
  <source src="lecture3.webm" type="video/webm" />
```

```
  <!--mp4 supported in modern browsers, but lower  
quality-->
```

```
  <source src="lecture3.mp4" type="video/mp4" />
```

```
  <!--backup important for some old browsers-->
```

```
   tag">
```

```
</video>
```


Fallbacks: why?

- Format not supported (webm, ogg, flac)
- Font might not support certain characters
- Might take time to load (“flash of unstyled text”)
 - Pick a similar default font

The fox jumped over the lazy dog, the scoundrel.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.


<https://css-tricks.com/css-basics-fallback-font-stacks-robust-web-typography/>

There's a lot to CSS.
**I can't create much
from memory alone.**

References

- <https://www.w3schools.com/cssref/>
- <https://cssreference.io/>
- <https://developer.mozilla.org/en-US/docs/Web/CSS/Reference>
- <https://www.codecademy.com/learn/learn-css>

Debugging in browser

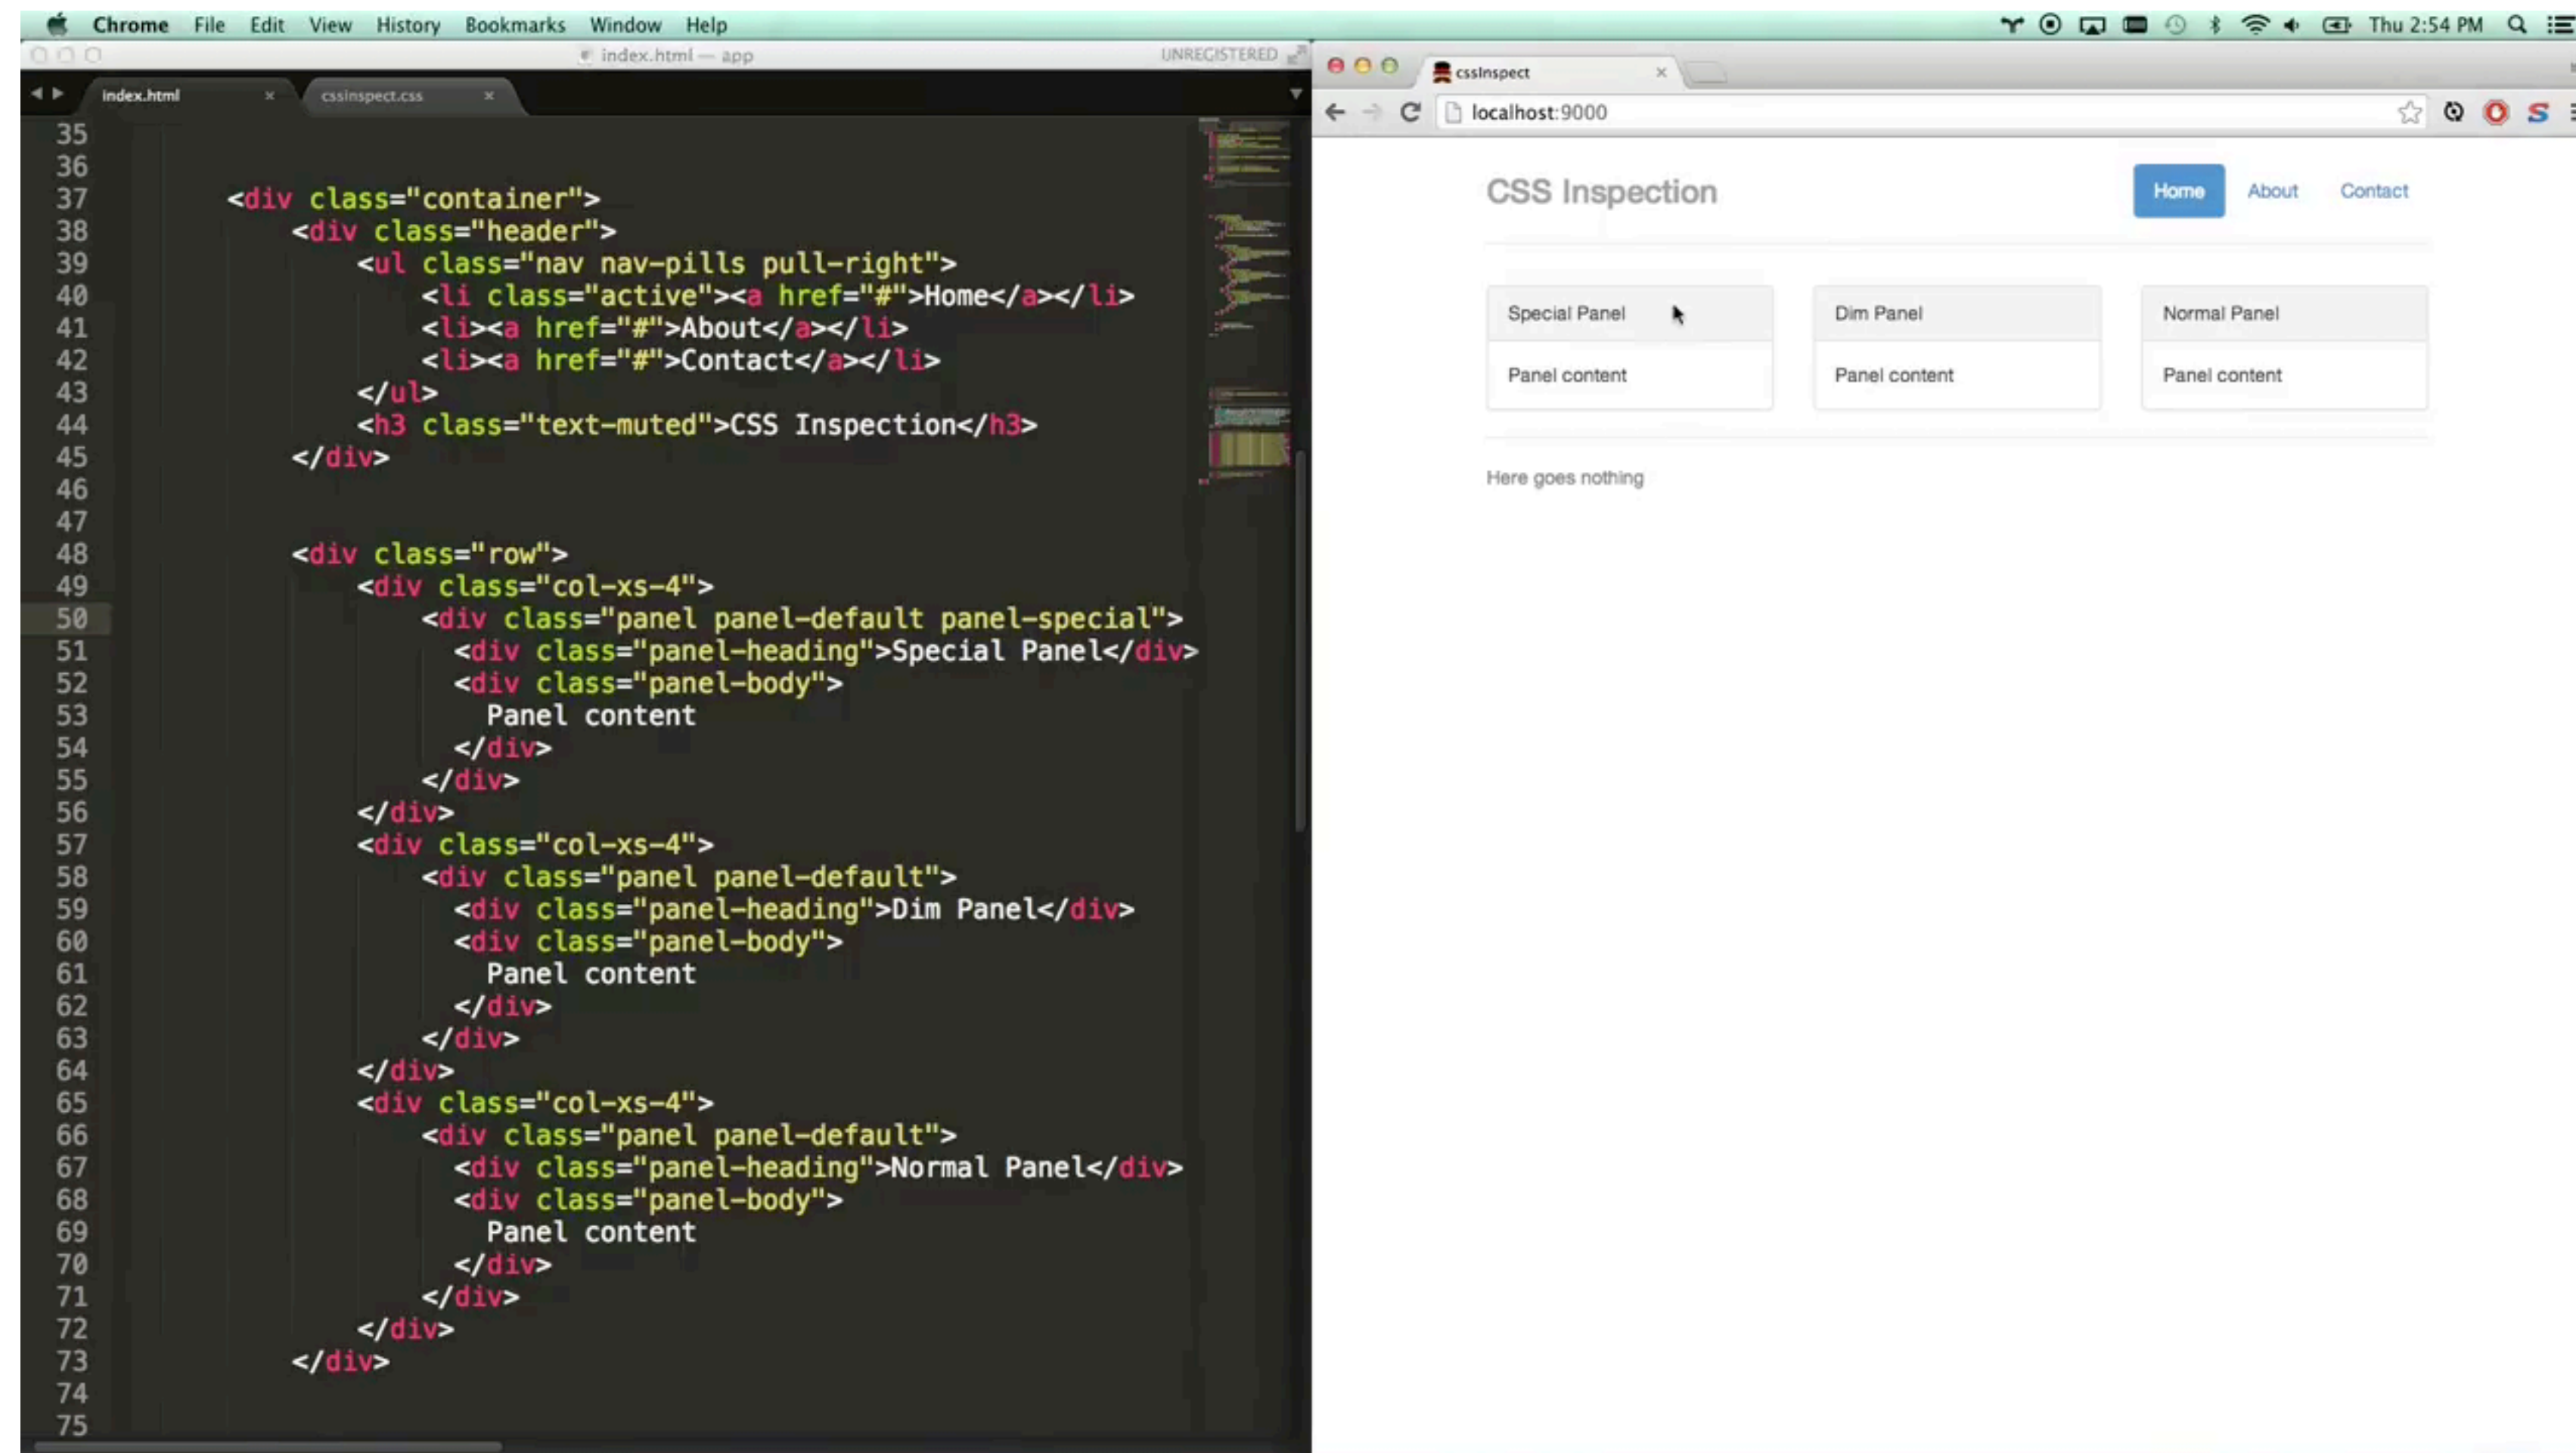

<https://www.youtube.com/watch?v=Z3HGGJsNLQ1E>

Browser compatibility


Used to be a much bigger issue, but still worth checking

The screenshot shows the CanIUse.com website for the feature "CSS Filter Effects". The page includes a description of the feature, usage statistics for the U.S.A. and Global, and a detailed browser compatibility table. The table lists various browsers and their versions, with green cells indicating support and red cells indicating no support. A legend at the bottom right explains the color coding: green for "Supported" and red for "Not supported".

Browser	Version	Support
IE	11	Not supported
Edge	17	Supported
Firefox	61	Supported
Chrome	63	Supported
Safari	11.1	Supported
iOS Safari	9.3	Supported
Opera Mini	all	Not supported
Chrome for Android	69	Supported
UC Browser for Android	11.8	Supported
Samsung Internet	7.2	Supported

<https://caniuse.com/>

Validation

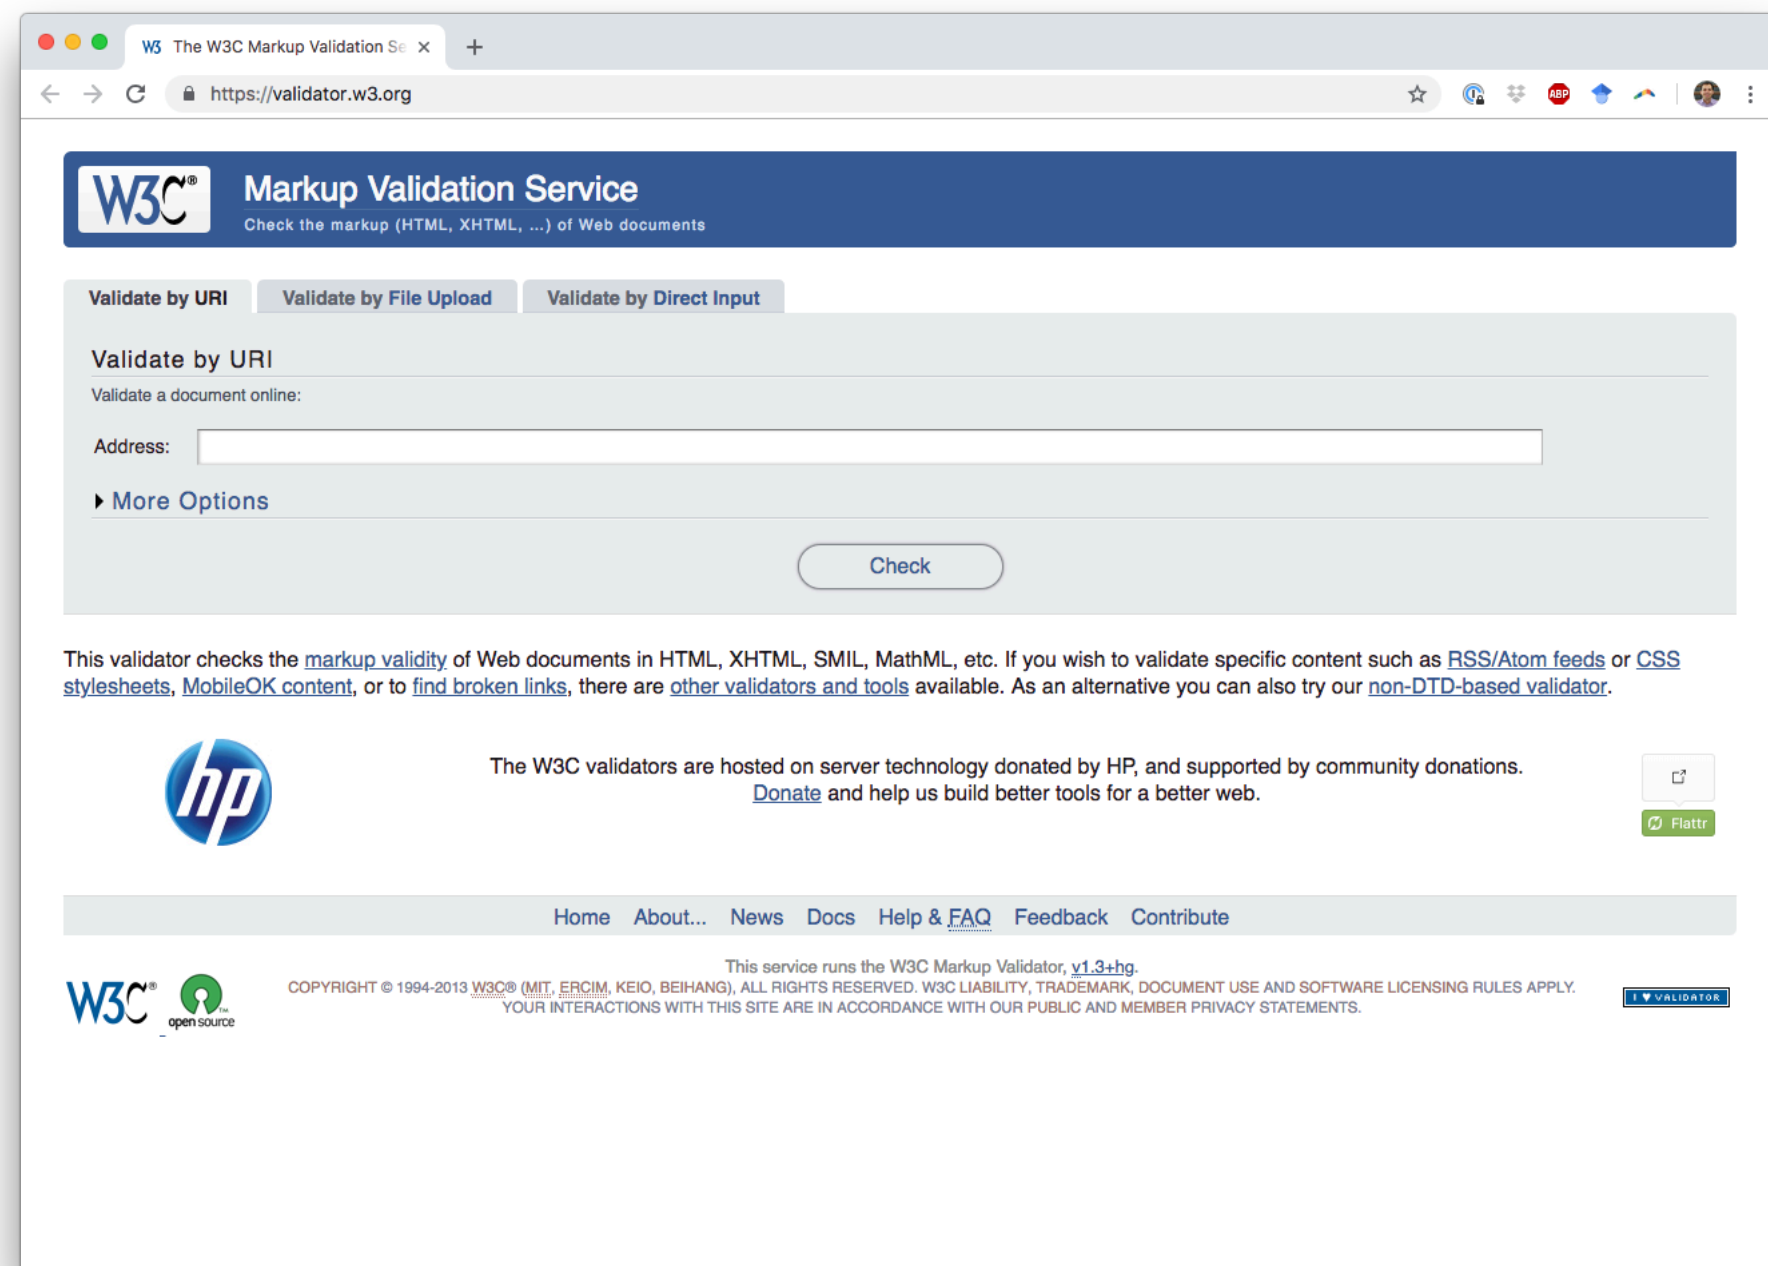


<https://validator.w3.org>

Today's goals

By the end of today, you should be able to...

- Explain the goals of CSS and why it exists as separate from HTML
- Describe the CSS hierarchy and fallback structure
- Utilize the box model and positioning options to arrange content
- Style nested tags with child, adjacent sibling, and general sibling selectors
- Debug CSS in the browser and find additional resources online

Next lecture: responsive design

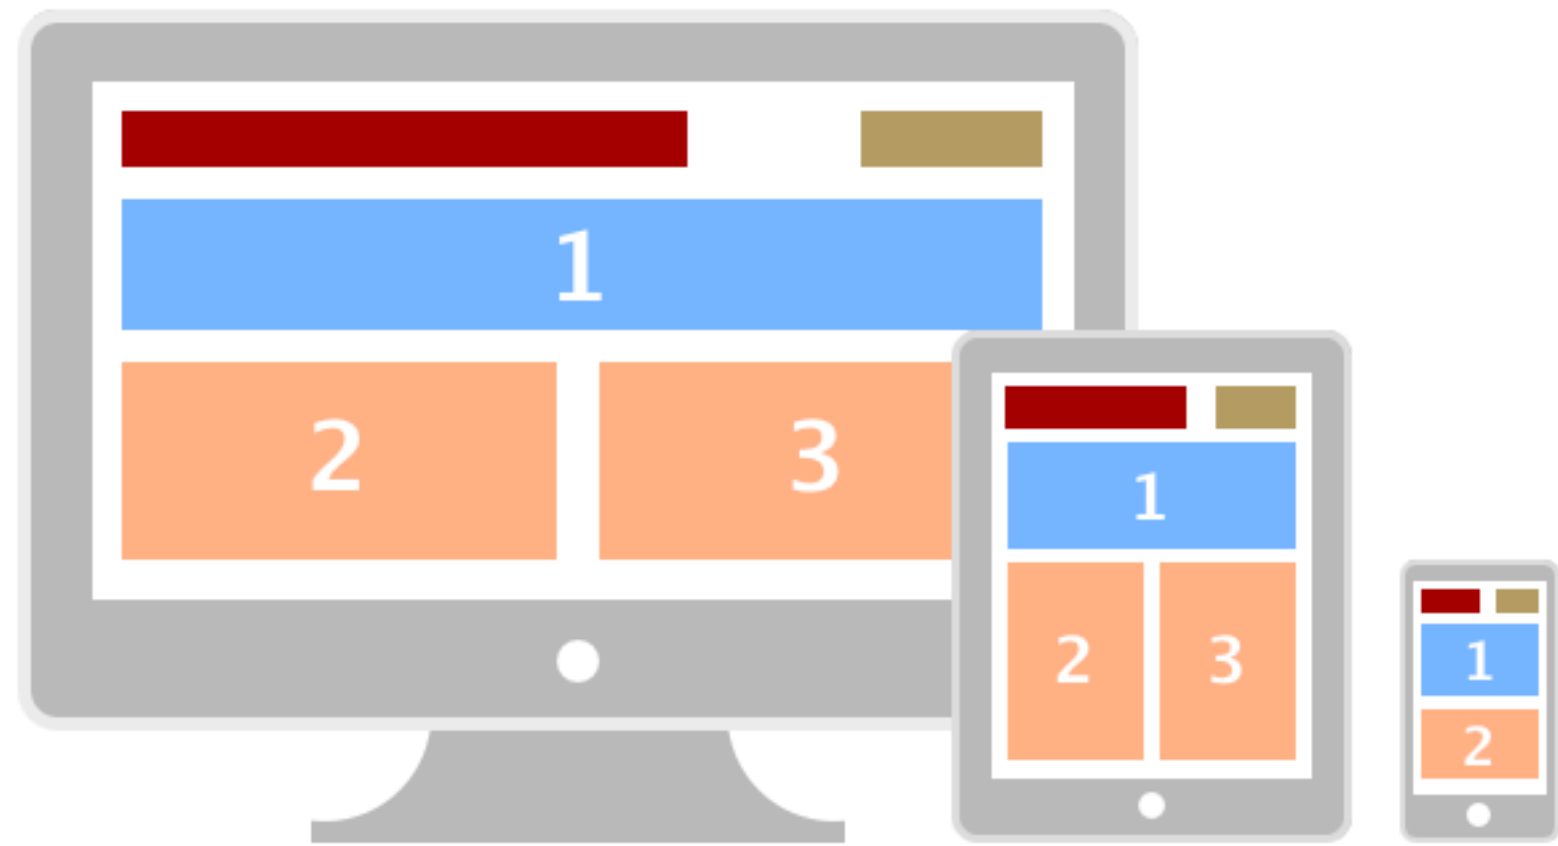

IN4MATX 133: User Interface Software

Lecture 3:
CSS

Professor Daniel A. Epstein
TA Jamshir Goorabian
TA Simion Padurean