# CE208-Database Management Systems CE208-Database Management Systems

Week-1 (Intro)

Spring Semester, 2021-2022

**Instructor:** Yıldıran Yılmaz

Email: yildiran.yilmaz@erdogan.edu.tr

Office Hours: Thursday

Download PDF-MS, PDF-MD, DOCX-MD, PPTX-MD, PPTX-MS

### **Outline**

- What is Database?
- Database Examples
- Database
- What is Database Management System?
- Classification of Database Management Systems



#### **Outline**

- Hierarchical databases
  - Network databases
  - Relational databases
  - Object Oriented databases
- Why use a database?
- Advantages of the Database Approach
- Database Management Systems



### Outline

- Database Structure
- Table
- Data Types
  - MYSQL Data Types
- Key
- Primary key
- Foreign key
- Database Design



### What is Database?

- It is an information repository where data that is related to each other is kept.
- The collection of data arranged in accordance with the purpose of use
- They are information stores with their logical and physical definitions.



## **Database Examples**

- University Student Affairs Information System
- Hospital Patient, doctor, treatment, equipment, financial information
- A commercial company Customer, Product, Sales, Payment, Delivery information
- Bank Customer, deposit, credit card, credit information



### **Database**

- The database concept was first introduced in the 1980s.
- It is used in everywhere from a simple web application up to large and complex data of international organizations
- Database applications are needed in many areas.



## What is Database Management System?

It is a software system in which various complex following operations are performed.

- Creating a new database,
- Editing the database
- To use,
- Develop
- to take care of (maintanance)




## Classification of Database Management Systems

- By Data Model
  - Hierarchical
  - Network
  - relational
  - Object Oriented
- By Number of Users
  - o single user
  - multi-user




#### Hierarchical databases

- It is the first model used for databases.
- Hierarchical databases store information in a tree structure.

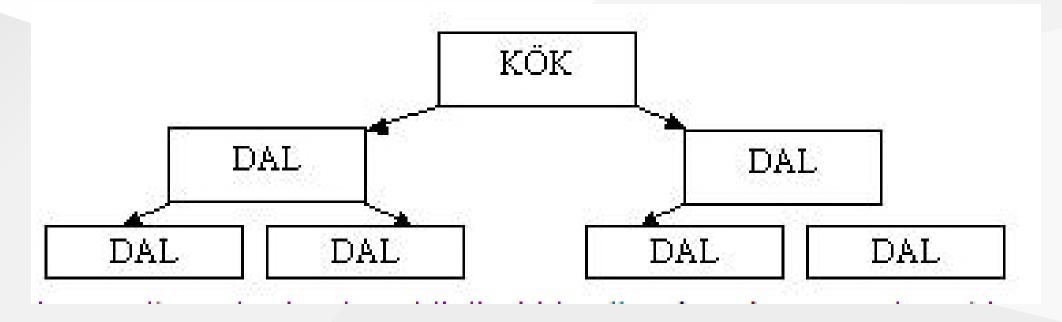

### **Network databases**

• When hierarchical databases were insufficient, a structure in which data was stored in the form of graphs, which is a more advanced version of trees, emerged at the end of the 1960s.

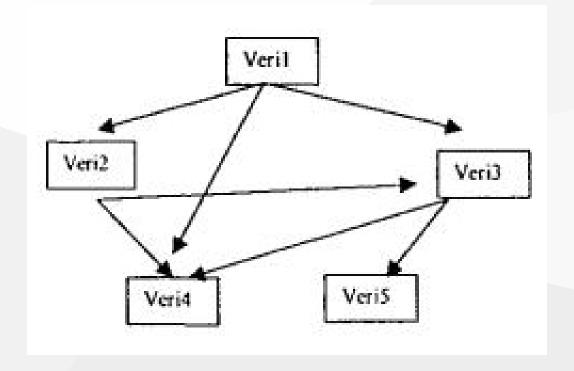




#### Relational databases

- It was developed in the early 1970s.
- In this system, data is stored in tabular form.
- Connections between tables are represented by mathematical relationships.
- Almost all database programs today have this structure.



#### Relational databases

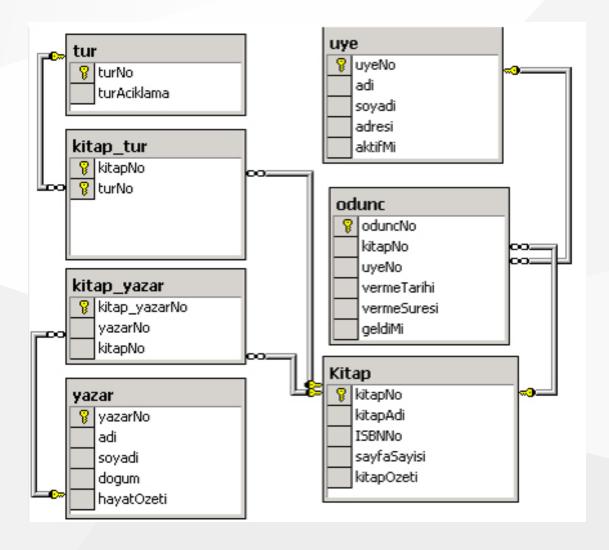



### **Object Oriented databases**

- Objects used in many word processor and spreadsheet programs today are also used in databases.
- Object-oriented database means a database created and used in an object-oriented language such as

```
° C++ ,
```

○ C# ,

○ java,

○ Visual Basic.



## Why use a database?

- The traditional approach to holding, storing and accessing data uses the approach of grouping data into separate files.
- With the increase in data and the need to access and edit data at the same time, the traditional approach has been inadequate.



## Advantages of the Database Approach

- Preventing duplication of common data;
- Ensuring centralized control and consistency of data
- Ensuring data sharing
- Hiding physical structure and access method complexities from the user with multilayered architectures,
- Presenting only the data that is of interest to each user in easy, understandable structures



## Advantages of the Database Approach

- Ease of application software development with the analysis, design and development tools provided.
- Providing the necessary facilities for data integrity,
- Ensuring the desired level of security and confidentiality
- Solving operational problems such as backup, reboot, repair



## **Database Management Systems**

- Oracle database
- IBM DB/2
- Adaptive Server Enterprise
- Informix
- Microsoft Access
- Microsoft SQL Server
- Microsoft Visual FoxPro
- MySQL




## **Database Management Systems**

- PostgreSQL
- Progress
- SQLite
- Teradata
- CSQL
- OpenLink Virtuoso



### **Database Structure**

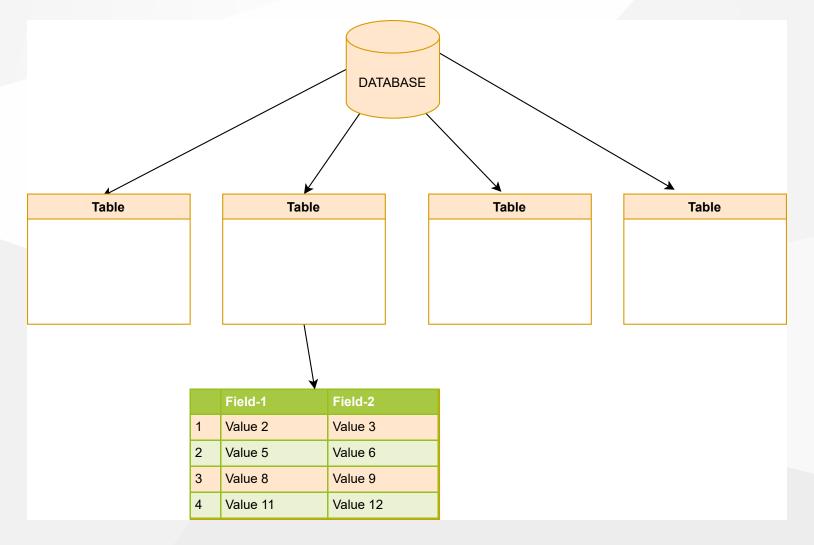



- A database consists of data stored in tables.
- Tables are a group of data that is formed by arranging data in rows and columns.
- For example, 2 tables are created to store the course content and student information in the database:
  - Student information
  - contents



- Each piece of information in the table is called a **record**, and the columns are called **a field**.
- For example, in the student information table, following information is included.
  - Student number,
  - Name and surname,
  - o date of birth,
  - Place of birth,
  - E mail address



Ogr_no	Ad_soyad	d_tarih	d_yeri	e-mail
1	Ayşe Öztürk	01.11.1979	Konya	ayse@gazi.edu.tr
2	Sema Özdemir	24.05.1975	Ankara	sema@gazi.edu.tr
3	Serdar Gülpınar	06.06.1983	Adana	serdar@gazi.edu.tr
4	Mehmet Efe	11.02.1978	Niğde	mehmet@gazi.edu.tr
5	Zerrin Polat	22.08.1980	Antalya	zerrin@gazi.edu.tr
6	Ulviye Kubalı	12.12.1984	İstanbul	ulviye@gazi.edu.tr



## **Fields**

Ogr_no Ad_	soyad d_tari	h d_yeri	e-mail
------------	--------------	----------	--------

## Record

1	Ayşe Öztürk	01.11.1979	Konya	ayse@gazi.edu.tr
2	Sema Özdemir	24.05.1975	Ankara	sema@gazi.edu.tr



## **Data Types**

- In order to have information about the structure of the records kept in the database, some properties of the fields must be defined beforehand.
- For example, the personnel registration number must be made up of integers, names and surnames must be words.



- Numeric
- Date and Time
- Textual (String)
- Spatial



#### **TINYINT:**

- For very small integer values
- When Signed is defined, the values are between -128 and 127.
- Unsigned defined range is between 0 and 255.



#### **SMALLINT**:

- For small integer values
- When Signed is defined, the values are between -32768 and 32767.
- Unsigned defined range is 0 to 65535.



#### **MEDIUMINT:**

- For medium-sized integer values.
- When Signed is defined, the values are between -8388608 and 8388607.
- Unsigned defined range is between 0 and 16777215.



### INT(n):Interger

- For normal-sized integer values.
- When Signed is defined, the values are between -2147483648 and 2147483647.
- Unsigned defined range is between 0 and 4294967295.



### **BIGINT:**

- For large integer values.
- Can take integer value -9223372036854775808 to 9223372036854775807



#### FLOAT:

- Keeps numbers with their fractions.
- Max. character width is taken as a parameter. (up to 23 digits)



#### **DOUBLE:**

- Keeps numbers with their fractions.
- Max. character width is taken as a parameter. (24 to 53 digits)



#### **DECIMAL**:

- Keeps numbers with their fractions.
- The integer part can have a maximum 64 digits, and the fractional part a maximum 30 digits.



#### **DATETIME:**

• Datetime information in Year+Month+Day+Hour+Minute+Second format

YYYY-MM-DD HH:MM:SS



#### TIMESTAMP:

• Time information from January 1, 1970 to January 18, 2038, in the format Year+Month+Day+Hour+Minute+Second.

YYYYMMDDHHMMSS



#### DATE:

• Date field that can change from 1000-01-01 to 9999-12-31.

YYYY-MM-DD



### CHAR(n):

• Fixed-length data with n characters.



### TEXT:

• A text field that can hold up to 65535 characters.



### **MEDIUMTEXT:**

• Text field up to 16777215 characters



### VARCHAR(n):

• Characters of varying size, not exceeding n



### **BOOL**:

• A data type that takes the value 0 or 1. or True/ False



# Key

- A key forces one or more fields to be entered as qualifiers for a row.
- There are 2 types of keys:
  - Primary Key
  - Foreign Key



# Primary key

- It is the key data that will enable access to a record.
- For example, there are two Ahmet among the students. Each student must have a unique number in order to find the Ahmet we want while searching.
- For example student number could be a primary key
- Multiple fields can have primary keys together



• A foreign key is a set of attributes in a table that refers to the primary key of another table. The foreign key links these two tables.



### **Persons Table**

PersonID	LastName	FirstName	Age
1	Hansen	Ola	30
2	Svendson	Tove	23
3	Pettersen	Kari	20



### **Orders Table**

OrderID	OrderNumber	PersonID
1	77895	3
2	44678	3
3	22456	2
4	24562	1



- Notice that the "PersonID" column in the "Orders" table points to the "PersonID" column in the "Persons" table.
- The "PersonID" column in the "Persons" table is the **PRIMARY KEY** in the "Persons" table.
- The "PersonID" column in the "Orders" table is a **FOREIGN KEY** in the "Orders" table.
- The **FOREIGN KEY** constraint prevents invalid data from being inserted into the foreign key column, because it has to be one of he values contained in the parent table.



## **Database Design**

- Objects are defined
  - o Library system: books, members, types, loan movements



- A table is created for each object:
  - book,
  - o members,
  - o types,
  - woodc\_movements



A key field is selected for each table

o book table: book no

Members table: Userno



- A column is added to the table for each property of the objects
  - o Book table: book number, year, author, name, related field



- Additional tables are created for recurring object properties.
  - request table:

userno	request_date	Book_name	Book_date	Book_author	Related_field
•	•	•	•	•	•
•	•	•	•	•	•



- Fields that are not directly related to the table are determined.
  - The address of the member who borrowed the book in the loan transactions table is not directly related to this table.
  - This data should be included in the members table where member information is kept.



- Relationships between tables should be defined.
  - The relationship between the **fields** in a **table** is defined.
  - For example, the userno field in the members table should be associated with the userno field in the request table.



#### Resources

- Köseoğlu, K. (2005). Veri Tabanı Mantığı. Şefik Matbaası. İstanbul
- Alokoç Burma, Z. (2005). Veritabanı Yönetim Sistemleri ve SQL / PL SQL / T SQL.
   Seçkin Yayıncılık. Ankara



$$End-Of-Week-1-Module$$

