

==> if a variable is having multiple words follow camel case convention

pricePerQuantity ==> camel case

Java ==> HLL ==> english words + symbols(+)

opertaors ==> symbols that are there in progg language

Arithmetic Operators

+ ==> addition

- ==> subtraction

* ==> multiplication

/ ==> division

% ==> modulo ==> divide and give your remainder


++(Increment Operator)

will increase the value by +1

--(Decrement Operator)

will decrease the value by -1

these can be used before the variable and after the variable

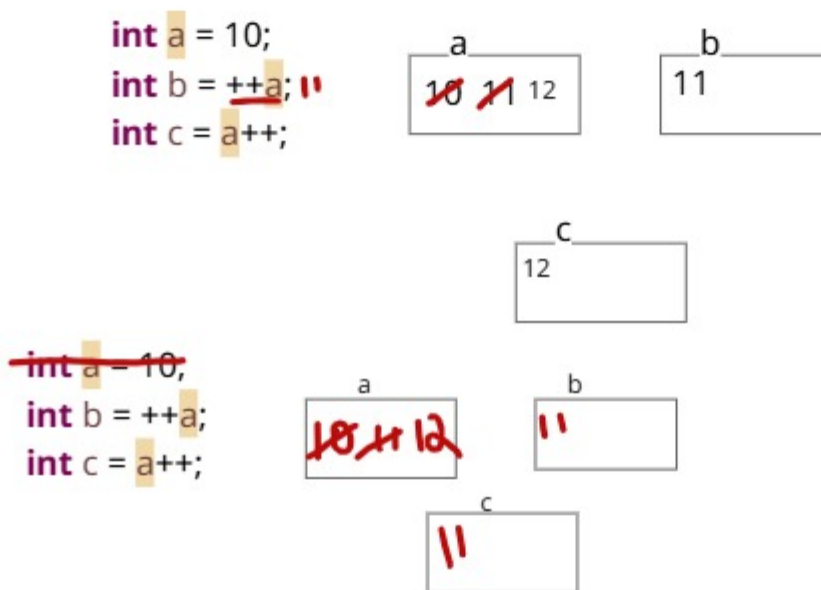

++a ==> increment first and then update

a++ ==> update first and then increment

Assignment Operator

```
int age = 20;
```

== ==> assignemtn operator

age += 10 ==> age = age + 10

age -= 10 ==> age = age - 10

age *= 10 ==> age = age * 10

age /= 10 ==> age = age / 10

age %= 10 ==> age = age % 10

=, +=, -=, *=, /=, %= ==> Assignment Operators

conditional operators

<, >, <=, >=, !=, ==

If we want to collect the integer entered by the user ==> nextInt()

If we want to collect the decimal entered by the user ==> nextFloat() OR nextDouble()

Java ==> Scanner class(built in class) ==> nextInt()

Logical Opertaors

&&, ||, !

Ternary Operator ==> short cut for if else condition