

Every browser has some storage facility available

There are 2 types of storages are inside the browser:-

- 1) Local Storage ==> stores data permanently
- 2) Session Storage ==> stores data only when the application is running
5 MB to 30 MB

Local Storage OR Session Storage will always store the data in the form of KEY-VALUE pair

setItem() ==> That is used to store the data inside the L.S

Todo Application
Pokemons
Music Player }


say suppose, you want to develop a website like flipkart for practice purpose

you want to learn

how add to cart functionality can be developed

how wishlist functionality can be developed


Flipkart ==> products(name, image, price, desc,)

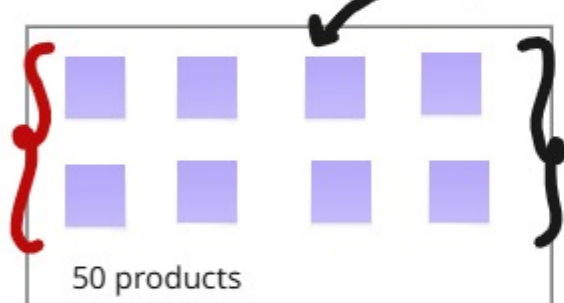


We dont write every line of HTML code and CSS code from scratch!

There is a website in the internet ==> **fakestoreapi.com**


==> This website gives you 20 products details(name, image, price, desc,)

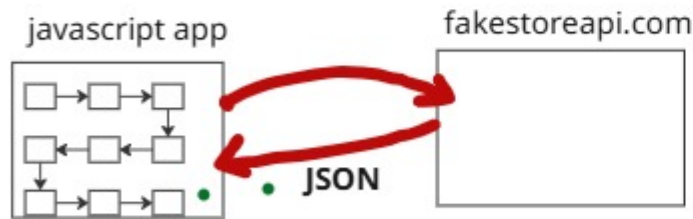

How javascript can communicate with other application's present in the internet!

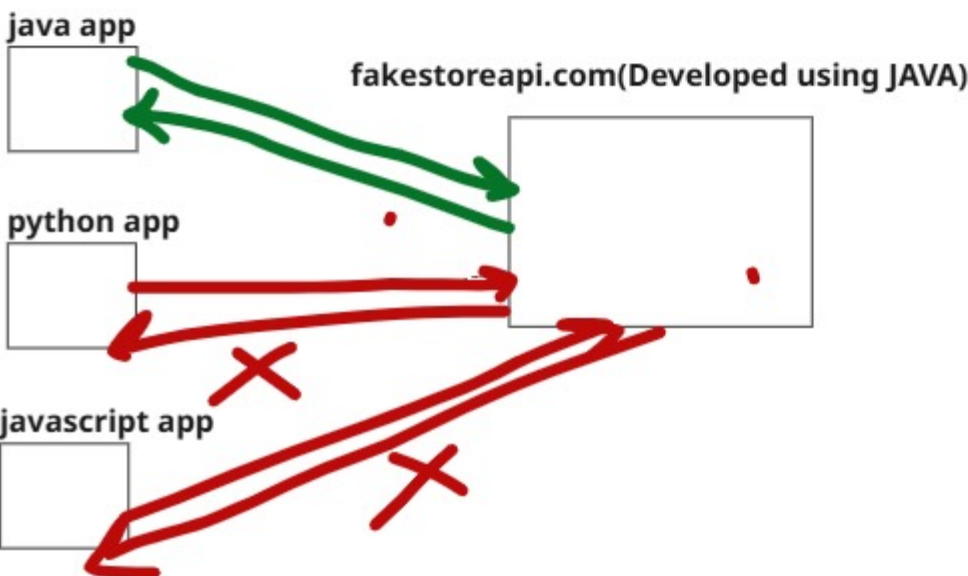

JSON(Javascript Object Notation)

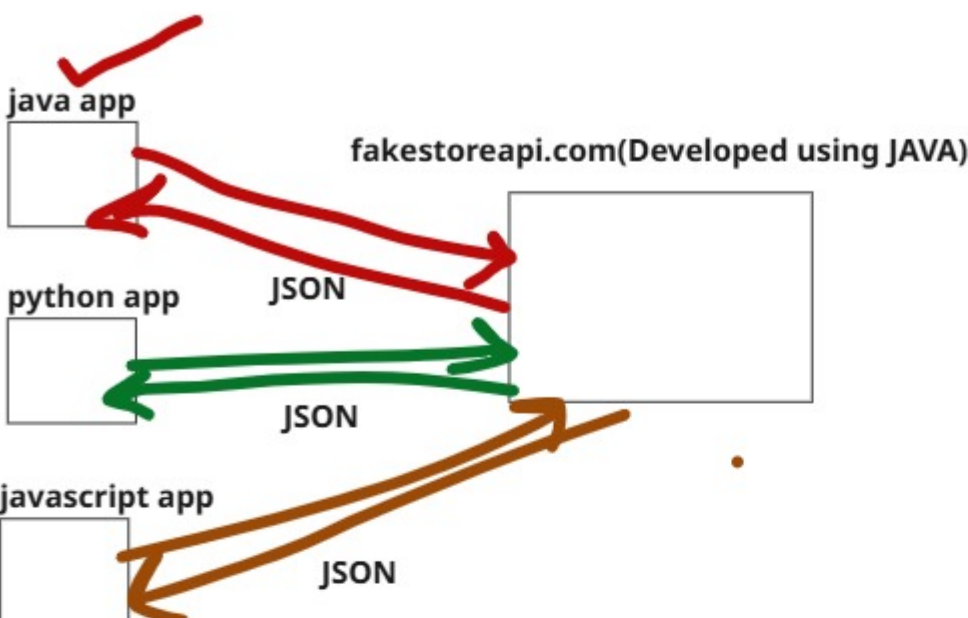

JSON ==> It is a message format that any application in the world can understand!

Objects and JSON ==> 99.99 % same



You → Friend

During that 7 days ==> Promise ==> PENDING

After 7 days ==> Gave the money ==> FULLFILLED

After 7 days ==> Didn't give the money ==> REJECTED

```
const productsOutput = fetch("https://fakestoreapi.com/products")
console.log(productsOutput)
```

Your javascript ==> fakestoreapi.com

2 sec of time to connect

3 sec of time to get the data

pb x D

after 5 sec, thr promise might be either fulfilled OR rejected
Assume thr promise is fulfilled ==> javascript automatically calls then() and if the promise is rejected ==> javascript automatically calls catch()