

# VEHICLE REGISTRATION SYSTEM


### USE CASE DIAGRAM

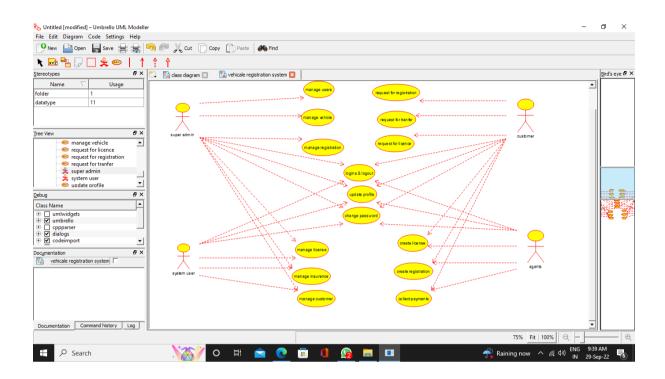


### **CLASS DIAGRAM**

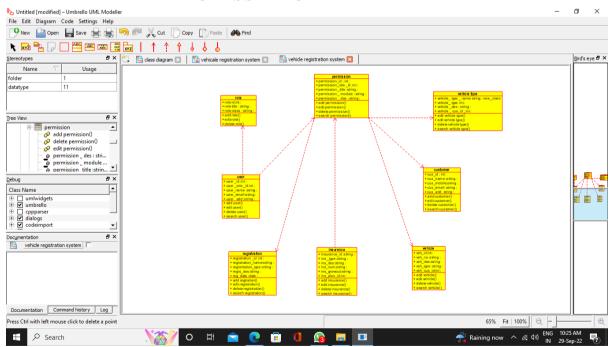


### **ACTIVITY DIAGRAM**

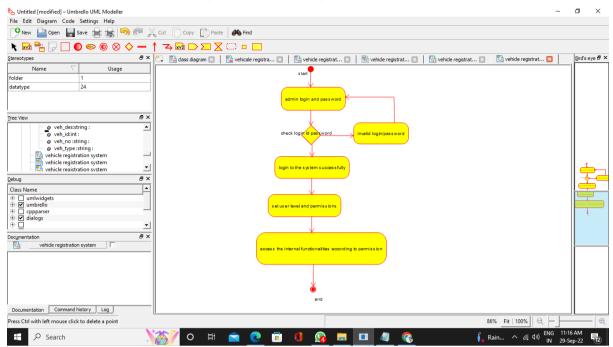


## SEQUENCE DIAGRAM

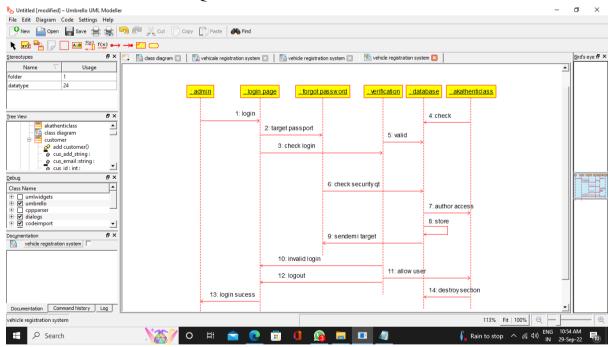


### **COLLABORATION DIAGRAM**

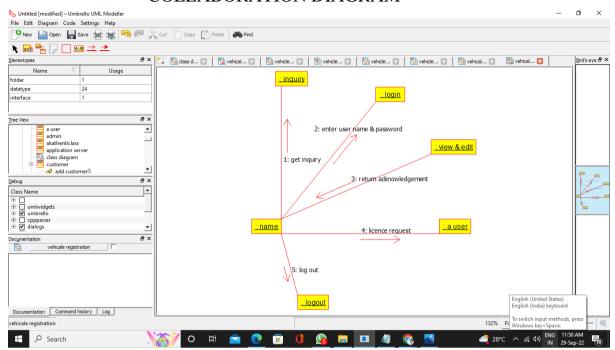

### **COMPONENT DIAGRAM**

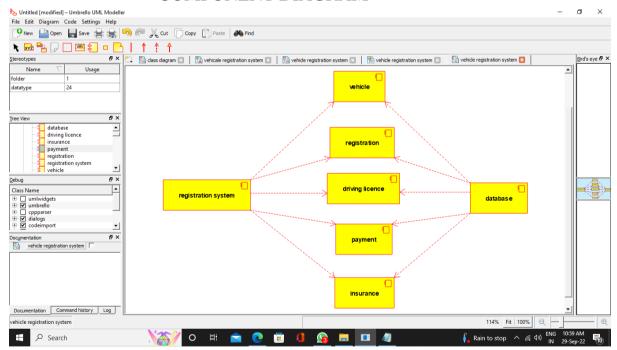

## **DEPLOYMENT DIAGRAM**

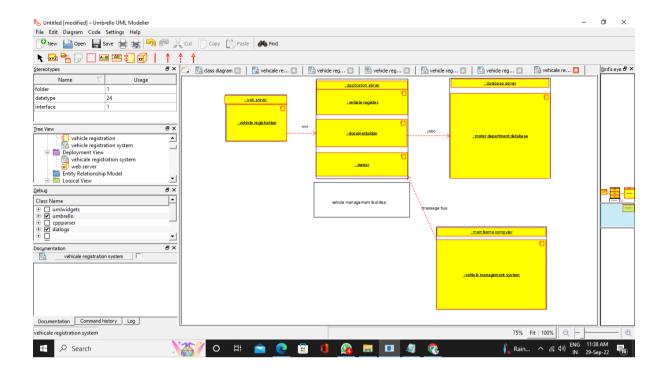

## PROGRAM CODE

```
**

* Class customer

*/
public class customer {

//
// Fields
//

public void cus_id_int;
public void cus_name_string;
public void cus_mobile_string;
public void cus_email_string;
public void cus_add_string;

//
// Constructors
```

```
//
public customer() { };
//
// Methods
//
//
// Accessor methods
//
/**
* Set the value of cus_id_int
* @param newVar the new value of cus_id_int
public void setCus_id_int (void newVar) {
 cus_id_int = newVar;
}
/**
* Get the value of cus_id_int
* @return the value of cus_id_int
public void getCus_id_int () {
 return cus_id_int;
}
/**
* Set the value of cus_name_string
* @param newVar the new value of cus_name_string
*/
public void setCus_name_string (void newVar) {
 cus_name_string = newVar;
}
/**
```

```
* Get the value of cus_name_string
* @return the value of cus_name_string
*/
public void getCus name string () {
 return cus_name_string;
/**
* Set the value of cus_mobile_string
* @param newVar the new value of cus_mobile_string
public void setCus_mobile_string (void newVar) {
 cus_mobile_string = newVar;
}
* Get the value of cus_mobile_string
* @return the value of cus_mobile_string
*/
public void getCus_mobile_string () {
 return cus_mobile_string;
}
/**
* Set the value of cus_email_string
* @param newVar the new value of cus_email_string
*/
public void setCus_email_string (void newVar) {
 cus_email_string = newVar;
}
/**
* Get the value of cus_email_string
* @return the value of cus_email_string
public void getCus_email_string () {
 return cus_email_string;
```

```
}
/**
* Set the value of cus_add_string
* @param newVar the new value of cus_add_string
public void setCus_add_string (void newVar) {
 cus_add_string = newVar;
/**
* Get the value of cus_add_string
* @return the value of cus_add_string
*/
public void getCus_add_string () {
 return cus_add_string;
}
//
// Other methods
//
/**
public void add_customer()
/**
*/
public void edit_customer()
/**
```

```
*/
 public void delete_customer()
 /**
 */
 public void search_customer()
}
/**
* Class insurence
*/
public class insurence {
 //
 // Fields
 //
 public void insurance_id_string;
 public void ins__type_string;
 public void ins_des_string;
 public void ins_num_string;
 public void ins_growout_string;
 public void ins_plan_id_int;
 //
 // Constructors
 public insurence () { };
```

```
//
// Methods
//
// Accessor methods
//
/**
* Set the value of insurance_id_string
* @param newVar the new value of insurance_id_string
*/
public void setInsurance_id_string (void newVar) {
 insurance_id_string = newVar;
}
/**
* Get the value of insurance_id_string
* @return the value of insurance_id_string
*/
public void getInsurance_id_string () {
 return insurance_id_string;
}
/**
* Set the value of ins__type_string
* @param newVar the new value of ins__type_string
*/
public void setIns__type_string (void newVar) {
 ins__type_string = newVar;
}
/**
* Get the value of ins__type_string
* @return the value of ins__type_string
```

```
*/
public void getIns__type_string () {
 return ins__type_string;
}
/**
* Set the value of ins_des_string
* @param newVar the new value of ins_des_string
*/
public void setIns_des_string (void newVar) {
 ins_des_string = newVar;
/**
* Get the value of ins_des_string
* @return the value of ins_des_string
public void getIns_des_string () {
 return ins_des_string;
}
/**
* Set the value of ins_num_string
* @param newVar the new value of ins_num_string
*/
public void setIns_num_string (void newVar) {
 ins_num_string = newVar;
}
/**
* Get the value of ins_num_string
* @return the value of ins_num_string
*/
public void getIns_num_string () {
 return ins_num_string;
```

```
/**
* Set the value of ins_growout_string
* @param newVar the new value of ins_growout_string
*/
public void setIns_growout_string (void newVar) {
 ins_growout_string = newVar;
}
/**
* Get the value of ins_growout_string
* @return the value of ins_growout_string
public void getIns_growout_string () {
 return ins_growout_string;
}
/**
* Set the value of ins_plan_id_int
* @param newVar the new value of ins_plan_id_int
*/
public void setIns_plan_id_int (void newVar) {
 ins_plan_id_int = newVar;
}
/**
* Get the value of ins_plan_id_int
* @return the value of ins_plan_id_int
*/
public void getIns_plan_id_int () {
 return ins_plan_id_int;
}
//
// Other methods
//
/**
```

```
*/
 public void add_insurance()
 /**
 */
 public void edit_insurance()
 /**
 */
 public void delete_insurance()
 /**
 public void search_insurance()
 }
}
* Class permission
public class permission {
 //
```

```
// Fields
//
public void permission_id_int;
public void permission_role__id_int;
public void permission__title_string;
public void permission___module_string;
public void permission___des_string;
//
// Constructors
public permission () { };
//
// Methods
//
//
// Accessor methods
//
/**
* Set the value of permission_id_int
* @param newVar the new value of permission_id_int
*/
public void setPermission_id_int (void newVar) {
 permission_id_int = newVar;
}
/**
* Get the value of permission_id_int
* @return the value of permission_id_int
public void getPermission_id_int () {
 return permission_id_int;
```

```
}
/**
* Set the value of permission_role__id_int
* @param newVar the new value of permission_role__id_int
public void setPermission_role__id_int (void newVar) {
 permission_role__id_int = newVar;
/**
* Get the value of permission_role__id_int
* @return the value of permission_role__id_int
*/
public void getPermission_role__id_int () {
 return permission role id int;
}
/**
* Set the value of permission__title_string
* @param newVar the new value of permission__title_string
*/
public void setPermission__title_string (void newVar) {
 permission__title_string = newVar;
/**
* Get the value of permission__title_string
* @return the value of permission__title_string
*/
public void getPermission__title_string () {
 return permission__title_string;
}
/**
* Set the value of permission___module_string
* @param newVar the new value of permission___module_string
```

```
*/
public void setPermission ____ module_string (void newVar) {
 permission module string = newVar;
}
/**
* Get the value of permission___module_string
* @return the value of permission___module_string
*/
public void getPermission___module_string () {
 return permission___module_string;
/**
* Set the value of permission___des_string
* @param newVar the new value of permission___des_string
public void setPermission___des_string (void newVar) {
 permission___des_string = newVar;
}
/**
* Get the value of permission___des_string
* @return the value of permission___des_string
*/
public void getPermission___des_string () {
 return permission___des_string;
}
//
// Other methods
//
/**
*/
public void add_permission()
```

```
}
 /**
 */
 public void edit_permission()
 }
 /**
 public void delete_permission()
 /**
 public void search_permission()
}
* Class registration
public class registration {
 //
 // Fields
 //
 public void registration__id_int;
```

```
public void registration_name_string;
public void regisrtration_type_string;
public void regis_das_string;
public void reg_date_date;
//
// Constructors
//
public registration () { };
//
// Methods
//
//
// Accessor methods
//
/**
* Set the value of registration__id_int
* @param newVar the new value of registration__id_int
public void setRegistration__id_int (void newVar) {
 registration__id_int = newVar;
}
/**
* Get the value of registration__id_int
* @return the value of registration__id_int
*/
public void getRegistration__id_int () {
 return registration__id_int;
}
* Set the value of registration_name_string
```

```
* @param newVar the new value of registration_name_string
*/
public void setRegistration_name_string (void newVar) {
 registration_name_string = newVar;
}
/**
* Get the value of registration_name_string
* @return the value of registration_name_string
*/
public void getRegistration_name_string () {
 return registration_name_string;
}
/**
* Set the value of regisrtration_type_string
* @param newVar the new value of registration_type_string
public void setRegisrtration_type_string (void newVar) {
 regisrtration_type_string = newVar;
}
/**
* Get the value of regisrtration_type_string
* @return the value of regisrtration_type_string
*/
public void getRegisrtration_type_string () {
 return regisrtration_type_string;
}
/**
* Set the value of regis_das_string
* @param newVar the new value of regis_das_string
public void setRegis_das_string (void newVar) {
 regis_das_string = newVar;
```

```
/**
* Get the value of regis_das_string
* @return the value of regis_das_string
public void getRegis_das_string () {
 return regis_das_string;
}
/**
* Set the value of reg_date_date
* @param newVar the new value of reg_date_date
*/
public void setReg_date_date (void newVar) {
 reg_date_date = newVar;
}
/**
* Get the value of reg_date_date
* @return the value of reg_date_date
*/
public void getReg_date_date () {
 return reg_date_date;
}
//
// Other methods
//
/**
*/
public void add_regtration()
{
/**
```

```
*/
 public void edit_registration()
 /**
 */
 public void delete_registration()
 }
 /**
 */
 public void search_registration()
 }
}
/**
* Class role
*/
public class role {
 //
 // Fields
 //
 public void role_id_int;
 public void role_title_string;
 public void role_class_string;
 //
```

```
// Constructors
//
public role () { };
//
// Methods
//
// Accessor methods
//
/**
* Set the value of role_id_int
* @param newVar the new value of role_id_int
public void setRole_id_int (void newVar) {
 role_id_int = newVar;
/**
* Get the value of role_id_int
* @return the value of role_id_int
*/
public void getRole_id_int () {
 return role_id_int;
}
/**
* Set the value of role_title_string
* @param newVar the new value of role_title_string
*/
public void setRole_title_string (void newVar) {
 role_title_string = newVar;
```

```
/**
* Get the value of role_title_string
* @return the value of role_title_string
public void getRole_title_string () {
 return role_title_string;
}
/**
* Set the value of role_class_string
* @param newVar the new value of role_class_string
public void setRole_class_string (void newVar) {
 role_class_string = newVar;
}
/**
* Get the value of role_class_string
* @return the value of role_class_string
*/
public void getRole_class_string () {
 return role_class_string;
}
//
// Other methods
//
/**
*/
public void add_role()
/**
*/
```

```
public void edit_role()
 /**
 public void delete_role()
}
/**
* Class user
public class user {
 //
 // Fields
 public void user__id_int;
 public void user__role__id_int;
 public void user_name_string;
 public void user_email_string;
 public void user__add_string;
 //
 // Constructors
 public user () { };
 //
```

```
// Methods
//
//
// Accessor methods
/**
* Set the value of user__id_int
* @param newVar the new value of user__id_int
public void setUser__id_int (void newVar) {
 user__id_int = newVar;
/**
* Get the value of user__id_int
* @return the value of user__id_int
*/
public void getUser__id_int () {
 return user id int;
}
/**
* Set the value of user__role__id_int
* @param newVar the new value of user__role__id_int
*/
public void setUser__role__id_int (void newVar) {
 user__role__id_int = newVar;
}
/**
* Get the value of user__role__id_int
* @return the value of user__role__id_int
public void getUser__role__id_int () {
```

```
return user__role__id_int;
}
/**
* Set the value of user_name_string
* @param newVar the new value of user_name_string
*/
public void setUser_name_string (void newVar) {
 user_name_string = newVar;
}
/**
* Get the value of user_name_string
* @return the value of user_name_string
*/
public void getUser_name_string () {
 return user_name_string;
}
/**
* Set the value of user_email_string
* @param newVar the new value of user_email_string
public void setUser_email_string (void newVar) {
 user_email_string = newVar;
}
/**
* Get the value of user_email_string
* @return the value of user_email_string
*/
public void getUser_email_string () {
 return user_email_string;
}
* Set the value of user__add_string
```

```
* @param newVar the new value of user__add_string
*/
public void setUser__add_string (void newVar) {
 user__add_string = newVar;
}
/**
* Get the value of user__add_string
* @return the value of user__add_string
public void getUser__add_string () {
 return user__add_string;
}
//
// Other methods
//
/**
*/
public void add_user()
/**
public void edit_user()
}
/**
public void delete_user()
}
```

```
/**
 public void search_user()
 }
}
/**
* Class vehicle_type
public class vehicle_type {
 //
 // Fields
 //
 public new_class vehicle__type___name_string;
 public void vehicle__type_int;
 public void vehicle__des_string;
 public void vehicle___cus_id__int;
 //
 // Constructors
 public vehicle_type () { };
 //
 // Methods
 //
```

```
//
// Accessor methods
//
/**
* Set the value of vehicle__type___name_string
* @param newVar the new value of vehicle_type__name_string
*/
public void setVehicle__type___name_string (new_class newVar) {
 vehicle type name_string = newVar;
}
/**
* Get the value of vehicle_type__name_string
* @return the value of vehicle__type___name_string
*/
public new_class getVehicle__type___name_string () {
 return vehicle__type___name_string;
}
/**
* Set the value of vehicle__type_int
* @param newVar the new value of vehicle__type_int
public void setVehicle__type_int (void newVar) {
 vehicle__type_int = newVar;
}
/**
* Get the value of vehicle type int
* @return the value of vehicle__type_int
*/
public void getVehicle__type_int () {
 return vehicle__type_int;
}
/**
```

```
* Set the value of vehicle__des_string
* @param newVar the new value of vehicle__des_string
*/
public void setVehicle des string (void newVar) {
 vehicle__des_string = newVar;
/**
* Get the value of vehicle __des_string
* @return the value of vehicle des string
public void getVehicle__des_string () {
 return vehicle des string;
}
* Set the value of vehicle cus id int
* @param newVar the new value of vehicle___cus_id__int
*/
public void setVehicle___cus_id__int (void newVar) {
 vehicle___cus_id__int = newVar;
}
/**
* Get the value of vehicle cus id int
* @return the value of vehicle__cus_id__int
*/
public void getVehicle___cus_id__int () {
 return vehicle___cus_id__int;
}
//
// Other methods
//
/**
*/
```

```
public void add_vehicle_type()
 }
 /**
public void edit_vehicle_type()
 /**
public void delete_vehicle_type()
 /**
public void search_vehicle_type()
}
```