

Deployment Issues

Thursday, September 05, 2024 11:27 AM

1.

Notice: There are transfer locks detected indicating active Multi-Site transfer transactions. All transfers need to complete before the upgrade can safely continue. Ensure that the utility: ensure_site_consistency is successfully executed for any identified objects before running Clearlocks. Reference Multi-Site System Administration section and Release Notes for additional information.

Cannot kill '00005390:00003470 inhyd0006dc' - marked for preservation 'wgmZm2gXSKfwHB'. Found 1 processes marked for preservation.

- Open to command prompt and run the following commands:

○

CLEARING PROCESS LOCKS

Perform the following steps to clear dead process locks using the **clearlocks** utility.

1. Ensure that all Teamcenter and Teamcenter Integration for NX users are logged out of the system. When all users are logged out, all valid process locks are cleared.

2. Create a report of all remaining process locks by entering the following command:

```
$TC_ROOT/bin/clearlocks -node_names
```

The system displays a report listing network nodes that still have process locks set against the database. Because all users are logged off, these locks are dead and can be cleared.

3. Run the following command:

```
$TC_ROOT/bin/clearlocks
```

4. Create a report of all remaining process locks by entering the following command:

○

```
$TC_ROOT/bin/clearlocks -node_names
```

The system displays a report listing network nodes that still have process locks set against the database. Because all users are logged off, these locks are dead and can be cleared.

Any network nodes listed in this second report will require running the **clearlocks** utility with the **-assert_dead** argument to clear the difficult process locks.

5. Run the following command to clear locks held by the session of the specified nodes:

```
$TC_ROOT/bin/clearlocks -assert_dead node-name1 node-name2 node-name3...
```

node-name is a network node listed in the report.

6. Create a report of all remaining process locks by entering the following command:

```
$TC_ROOT/bin/clearlocks -node_names
```

This report should be clean (empty).

- If this does not work, then run the following command.
 - **clearlocks -drop_all_sst_locks infodba infodba dba**
- And re-run all the above mentioned commands to make sure all locks have been removed.


2.


```
Downloading File: model.xml
Downloading File: a2bmide_template.ref
Downloading File: a2bmide_template_en_US.ref
2010: Dataset a2bmide_template_en_US.ref has no references
9037: The named reference "Fnd0BMIDEResourceReference" cannot be added to, or removed from, the Dataset, because the reference does not exist.

Downloading File: model_lang.xml
Downloading File: model.xml
Downloading File: a2bmide_template.ref
2010: Dataset a2bmide_template.ref has no references
9037: The named reference "Fnd0BMIDEResourceReference" cannot be added to, or removed from, the Dataset, because the reference does not exist.
```

- Whenever you find issue like this, login the teamcenter with Infodba user and check whether the mentioned datasets (*a2bmide_template_en* named reference or not).
- If there are no named references, search the TC_ROOT or TC_DATA folders with the same name as dataset and add the latest file as named ref

3.

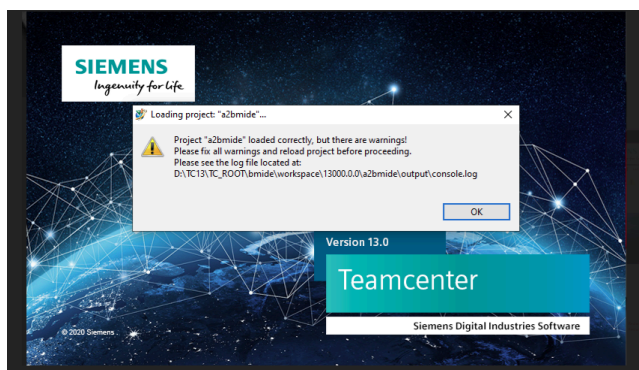

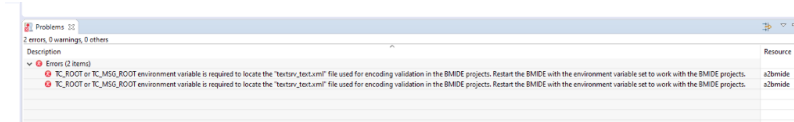

Open "D:\TC13\TC_ROOT\lang\textserver\no_translation\textsrv_text.xml"

```
<!-- SECTION DEFINING THE SMALLEST OR CUSTOM ENCODING FOR EACH LOCALE
<key id="locale_validation_encoding_en_US">iso-8859-1</key>
<key id="locale_validation_encoding_cs_CZ">iso-8859-2</key>
<key id="locale_validation_encoding_pl_PL">iso-8859-2</key>
<key id="locale_validation_encoding_de_DE">iso-8859-1;iso-8859-2</key>
<key id="locale_validation_encoding_es_ES">iso-8859-1</key>
<key id="locale_validation_encoding_fr_FR">iso-8859-1</key>
<key id="locale_validation_encoding_it_IT">iso-8859-1</key>
<key id="locale_validation_encoding_pt_BR">iso-8859-1</key>
<key id="locale_validation_encoding_ja_JP">shift_jis</key>
<key id="locale_validation_encoding_ko_KR">euc_kr</key>
<key id="locale_validation_encoding_ru_RU">iso-8859-5</key>
<key id="locale_validation_encoding_zh_CN">gb2312</key>
<key id="locale_validation_encoding_zh_TW">big5</key>
```

Change the value of en_us from us-ascii to iso-8859-1

And create a environment variable TC_MSG_ROOT and add D:\TC13\TC_ROOT\lang\textserver