




Propagation Rules

Monday, October 07, 2024 5:53 PM


- 4 types of security groups
 - a. **Security Group 1 – merge** – array type (When parent value changes, all the child values will also be changed).
 - b. **Security Group 2 – fill** – typed (Leave an existing propagated value unchanged).
 - c. **Security Group 3 – order** – LOV (IP Classification) (Leave an existing value unchanged if the value is explicitly set on the business object instance, else compare va
 - d. **Security Group 4 – over ride** – anything (Leave an existing value unchanged if the value is explicitly set on the business object instance, else get the value from t

1. Security Group 1 – merge

Create 3 business objects and add a persistent property of **array type** and for that property change the property constant, **Fnd0PropagationGroup** value to Secu business objects.

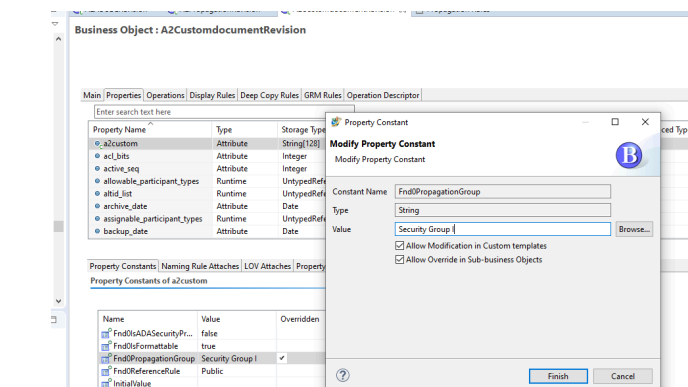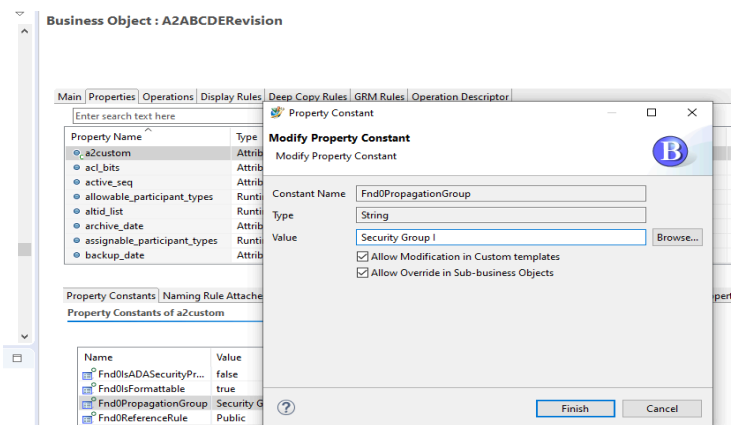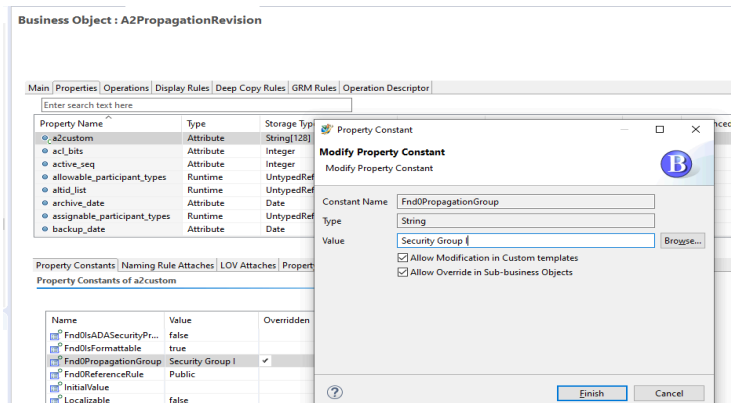

Open Propagation Rules editor tab under, BMIDE -> Editors and create a new rule.

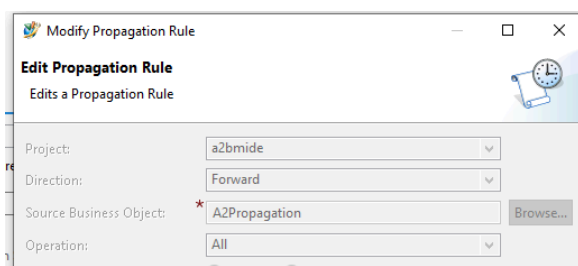

Relation:

IMAN_requirement

Browse...

Destination Business Object:

A2ABCDERevision

Browse...

Propagation Group:

Security Group I

Browse...

Action Condition:

isTrue

Browse...

Traversal Condition:

isTrue

Browse...

Propagation Style:

Merge

Secured

Background

?

Finish

Cancel

Modify Propagation Rule

Edit Propagation Rule

Edits a Propagation Rule

Project:

a2bmide

Direction:

Forward

Source Business Object:

A2ABCDERevision

Operation:

All

Property Type:

Relation

Reference

Relation:

IMAN_requirement

Browse...

Destination Business Object:

A2CustomdocumentRevision

Browse...

Propagation Group:

Security Group I

Browse...

Action Condition:

isTrue

Browse...

Traversal Condition:

isTrue

Browse...

Propagation Style:

Merge

Secured

Background

?

Finish

Cancel

Deploy the changes and create instance of the selected business objects and attach the instances based on the propagation rules.

In this case, attach ABCDERevision to PropagationRevision and CustomDocumentRevision to ABCDERevision. And update the property value and it will reflect ba

Examples:

Merge

Business object	Property Value (project_list)
Item	project1
Item Revision	project1
Dataset	project1

2. Assign project2 to Item Revision. The project2 value is propagated to Dataset.

Business object	Property Value (project_list)
Item	project1
Item Revision	project1, project2
Dataset	project1, project2

3. Assign project3 to Item. The project3 value is propagated to IR and Dataset.

Business object	Property Value (project_list)
Item	project1, project3
Item Revision	project1, project2, project3
Dataset	project1, project2, project3

FILL

Business object	Property Value (owning_project)
-----------------	---------------------------------

OneNote

Business object	Property Value (owning_project)
Item	project1
Item Revision	project1
Dataset	project1

Assign project2 to Item Revision. The value is changed on the IR because we setting the value.

Business object	Property Value (owning_project)
Item	project1
Item Revision	project2
Dataset	project1

Assign project3 to Item. The value is not propagated to Item Revision and D. the propagation rule style is **Fill**.

Business object	Property Value (owning_project)
Item	project3
Item Revision	project2
Dataset	project1

ORDER

Under IP Classification LOV, the order of the values is **Secret, super-secret, top-secret**. We can check that in Organization module.

1. Assign "secret" to Item. The value is propagated to Item Revision and Dataset.

Business object	Property Value (IP_classification)
Item	secret
Item Revision	secret
Dataset	secret

2. Assign "super-secret" to Item Revision. The value propagates to Dataset because the propagation rule style is **Order** and "super-secret" has higher precedence than "secret".

Business object	Property Value (IP_classification)
Item	secret
Item Revision	super-secret
Dataset	super-secret

For more information about order style propagation, see Defining IP clearance and classification levels.

OverWrite

Group: **Security Group IV**

Style: **Overwrite** Property: **custom** (single value string type)

1. Assign val1 to Item. The value is propagated to the Item revision and Dataset.

Business object	Property Value (custom)
Item	val1
Item Revision	val1
Dataset	val1

2. Assign val2 to Item Revision. The value is changed on Item Revision because we are explicitly setting the value, and it propagates to Dataset because the style is **Overwrite**.

Business object	Property Value (custom)
Item	val1
Item Revision	val2
Dataset	val2

3. Assign val3 to Item. The value is not propagated to Item Revision and Dataset because Val2 is explicitly set on Item Revision, and Dataset gets the value val2 from its nearest parent, Item Revision.

Business object	Property Value (custom)
Item	val3
Item Revision	val2

Dataset	val2
---------	------