

BMIDE Extensions

Friday, August 30, 2024 10:10 AM

Introduction:

- Extension is a business rule that adds pre-defined behavior to a business objects.
- An extension is an independent function. It is defined and made available for attachment to a specific operation of a business object.
- After defining an extension, it can be assigned to a business object or a property so that it is invoked at a particular point(pre-condition, pre-action, base-action, post a

Pre-requisites:

- Need to check for pre-defined extension in the extension lists.
- In which library the custom extension has to go.
- If the extension is required, need to find on which operation extension is required.(ex: Creation, Save as, revise etc).
- Which extension point (pre-condition, pre-action, post-action).

Creating a custom library:

- A library is a collection of files that includes programs, helper code and data.
- Path to create new library - **Extensions\code generation\libraries**.
- You can specify the library against which code is created by right-clicking a library and choosing **Organize-> Set as active library**.

Configuration:

- Open BMIDE.bat file in notepad++ and add the paths for tc_root/ bin and visual studio.
 - set TC_BIN = D:\TC13\TC_ROOT\bin
 - call "C:\Program Files (x86)\Microsoft Visual Studio\2017\WDEExpress\VC\Auxiliary\Build\vcvarsall.bat" x86_amd64.

```
etltool
title Teamcenter Business Modeler IDE
set TC_BIN = D:\TC13\TC_ROOT\bin

if not defined TC_ROOT set TC_ROOT=D:\TC13\TC_ROOT

if not defined IOP_SERVER_PATH set IOP_SERVER_PATH=your_iopserver_dir-
if not defined HTTP_SERVER_PATH set HTTP_SERVER_PATH=your_httpserver_dir-
if exist "%TC_ROOT%\install\tem_init.bat" call "%TC_ROOT%\install\tem_init.bat"

set JRE_HOME=%TC_JRE_HOME%
set JAVA_HOME=D:\Appa\Java\jdk1.8.0_231
set JDK_HOME=D:\Appa\Java\jdk1.8.0_231
set FMS_HOME=D:\TC13\TC_ROOT\tools


all "C:\Program Files (x86)\Microsoft Visual Studio\2017\WDEExpress\VC\Auxiliary\Build\vcvarsall.bat" x86_amd64
set PATH=%JRE_HOME%\bin;%JDK_HOME%\bin;%TC_ROOT%\lib;%FMS_HOME%\bin;%FMS_HOME%\lib;%FMS_HOME%\PATH%

echo Starting Teamcenter Business Modeler IDE...
if exist BusinessModelerIDE.exe (
  start BusinessModelerIDE.exe %*
) ELSE (
  start "%TC_ROOT%\bmodel\client\BusinessModelerIDE.exe" %*
)


endlocal
```

- Open BMIDE and create a new project and while creating the project, in the Build Configuration Information tab, give the following path in the compiler h

C:\Program Files (x86)\Microsoft Visual Studio\2017\WDEExpress\VC\Tools\MSVC\14.16.27023\include

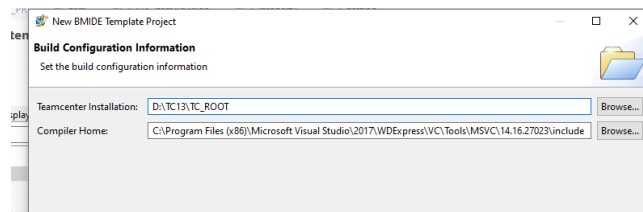

- Create a new business object, library and Extension and attach this extension to the custom business object.
- Select Extensions and right click on it and click on "Generate Extension Code".

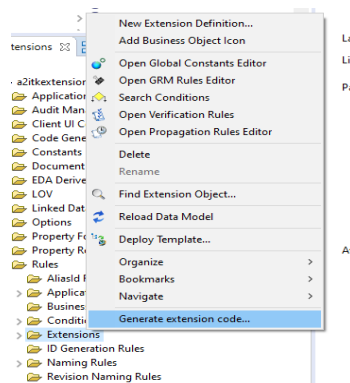

- Select the project and right click -> Generate code -> C++ Classes.
- Check whether the src folder is created or not.

```

> output
▼ src
  ▼ server
    ▼ A2ITK_lib
      A2ITK_new_extension.cxx
      A2ITK_new_extension.hxx
      liba2itk_lib_undef.h
    .cproject
    .project
    client_a2itkextensions.properties
    makefile.wntx64
    ProjectInfo.xml

```

- In the navigator pane, right click on the project -> Build Configurations -> Build All.

