Create a basic Notes app using AngularCODE :

```
notes-app/
└── src/
    └── app/
        ├── app.ts
        ├── app.html
        ├── app.css
        ├── app.config.ts
        ├── note.ts
        ├── note.service.ts
        ├── note-form/
        │   ├── note-form.component.ts
        │   ├── note-form.component.html
        │   └── note-form.component.css
        ├── note-list/
        │   ├── note-list.component.ts
        │   ├── note-list.component.html
        │   └── note-list.component.css
        └── note-item/
            ├── note-item.component.ts
            ├── note-item.component.html
            └── note-item.component.css
```

Main.ts

```
import { bootstrapApplication } from '@angular/platform-browser';
import { App } from './app/app';
import { appConfig } from './app/app.config';
bootstrapApplication(App, appConfig)
  .catch(err => console.error(err));
```

Note.ts

```
export interface Note {
  id: number;
  title: string;
  content: string;
}
```

note.service.ts

```
import { Injectable, signal } from '@angular/core';
import { Note } from './note';
@Injectable({
  providedIn: 'root'
})
export class NoteService {
  private notesSignal = signal<Note[]>([]);
  notes = this.notesSignal.asReadonly();
  private nextId = 1;
  // Add Note
  addNote(title: string, content: string): void {
    const newNote: Note = {
      id: this.nextId++,
      title: title,
      content: content
    };
    this.notesSignal.update(notes => [
      ...notes,
      newNote
    ]);
  }
  // Update Note
  updateNote(
```

```
    id: number,
    title: string,
    content: string
  ): void {
    this.notesSignal.update(notes =>
      notes.map(note =>
        note.id === id
          ? {
              ...note,
              title: title,
              content: content
            }
          : note
      )
    );
  }

  // Delete Note
  deleteNote(id: number): void {
    this.notesSignal.update(notes =>
      notes.filter(note => note.id !== id)
    );
  }
}
```

App.ts

```
import { Component } from '@angular/core';
import { NoteFormComponent } from './note-form/note-form.component';
import { NoteListComponent } from './note-list/note-list.component';

@Component({
  selector: 'app-root',
  imports: [
    NoteFormComponent,
    NoteListComponent
  ],
  templateUrl: './app.html',
  styleUrl: './app.css'
})
export class App {
}
```

App.config.ts

```
import { ApplicationConfig } from '@angular/core';
export const appConfig: ApplicationConfig = {
  providers: []
};
```

App.html

```
<div class="container">
  <h1>Notes App</h1>
  <app-note-form></app-note-form>
  <app-note-list></app-note-list>
</div>
```

App.css

```
body {
  margin: 0;
  font-family: Arial, sans-serif;
}
.container {
  padding: 20px;
}
h1 {
  text-align: center;
}
```

note-list/

note-list.component.ts

```
import { Component } from '@angular/core';
import { NoteService } from '../note.service';
import { NoteItemComponent } from '../note-item/note-item.component';
@Component({
  selector: 'app-note-list',
  imports: [NoteItemComponent],
  templateUrl: './note-list.component.html',
  styleUrl: './note-list.component.css'
})
export class NoteListComponent {
  constructor(
    public noteService: NoteService
  ) {}

}
```

note-list.component.html

```
<div class="note-list">
  <h2>My Notes</h2>
  @if (noteService.notes().length === 0) {
    <p class="empty">
      No notes available.
    </p>
  } @else {
    @for (
      note of noteService.notes();
      track note.id
    ) {
```

```
      <app-note-item
        [note]="note">
      </app-note-item>

    }

  }

</div>
```

note-list.component.css

```
.note-list {
  width: 500px;
  margin: 20px auto;
}

.note-list h2 {
  text-align: center;
}
```

note-item/

note-item.component.ts

```
import { Component, Input } from '@angular/core';
import { FormsModule } from '@angular/forms';
import { NoteService } from '../note.service';
import { Note } from '../note';
@Component({
  selector: 'app-note-item',
  imports: [FormsModule],
  templateUrl: './note-item.component.html',
  styleUrl: './note-item.component.css'
})
export class NoteItemComponent {
  @Input() note!: Note;
  editing = false;
  editTitle = '';
  editContent = '';
  constructor(private noteService: NoteService) {}
  // Start editing
  editNote(): void {
    this.editing = true;
    this.editTitle = this.note.title;
    this.editContent = this.note.content;
  }
  // Save updated note
  updateNote(): void {
    if (
      this.editTitle.trim() === '' ||
      this.editContent.trim() === ''
    ) {
      alert('Please enter title and content');
      return;
```

```
    }
    this.noteService.updateNote(
      this.note.id,
      this.editTitle.trim(),
      this.editContent.trim()
    );
    this.editing = false;
  }
  // Cancel editing
  cancelEdit(): void {
    this.editing = false;
  }
  // Delete note
  deleteNote(): void {
    this.noteService.deleteNote(
      this.note.id
    );
  }
}
```

note-item.component.html

```
<div class="note-item">
  @if (!editing) {
    <h3>{{ note.title }}</h3>
    <p>{{ note.content }}</p>
    <button type="button" (click)="editNote()">
      Update
    </button>
    <button type="button"      (click)="deleteNote()">
      Delete
    </button>
  } @else {
    <h3>Update Note</h3>
    <label>Title:</label>
    <input type="text" [(ngModel)]="editTitle" >
    <label>Content:</label>
    <textarea [(ngModel)]="editContent">
    </textarea>
    <br><br>
    <button type="button" (click)="updateNote()">
      Update Note
    </button>
    <button  type="button"  (click)="cancelEdit()">
      Cancel
    </button>
  }
</div>
```

note-item.component.css

```
.note-item {
  padding: 15px;
  margin: 15px 0;
  border: 1px solid #ccc;
  border-radius: 8px;
}
.note-item h3 {
  margin-top: 0;
}
.note-item p {
  margin: 10px 0;
  white-space: pre-wrap;
}
.note-item label {
  display: block;
  margin-top: 10px;
  margin-bottom: 5px;
  font-weight: bold;
}
.note-item input,
.note-item textarea {
  width: 100%;
  padding: 8px;
  box-sizing: border-box;
}
.note-item textarea {
  height: 80px;
  resize: vertical;
}
.note-item button {
  padding: 7px 15px;
```

```
  margin-right: 8px;
  margin-top: 10px;
  cursor: pointer;
}
```

note-form/

note-form.component.ts

```
import { Component } from '@angular/core';
import { FormsModule } from '@angular/forms';
import { NoteService } from '../note.service';
@Component({
  selector: 'app-note-form',
  imports: [FormsModule],
  templateUrl: './note-form.component.html',
  styleUrl: './note-form.component.css'
})
export class NoteFormComponent {
  title = '';
  content = '';
  constructor(private noteService: NoteService) {}
  addNote(): void {
    if (
      this.title.trim() === '' ||
      this.content.trim() === ''
    ) {
      alert('Please enter title and content');
      return;
    }
    this.noteService.addNote(
      this.title.trim(),
      this.content.trim()
    );
```

```
    this.title = '';
    this.content = '';
  }
}
```

note-form.component.html

```
<div class="note-form">
  <h2>Add New Note</h2>
  <label>Title:</label>
  <input type="text"   [(ngModel)]="title"    placeholder="Enter title"  >
  <label>Content:</label>
  <textarea [(ngModel)]="content" placeholder="Enter content"  ></textarea>

  <button type="button"   (click)="addNote()">
    Add Note
  </button>
</div>
```

note-form.component.css


```
.note-form {
  width: 400px;
  margin: 20px auto;
  padding: 20px;
  border: 1px solid #ccc;
  border-radius: 8px;
}
.note-form h2 {
  text-align: center;
}
```

```
.note-form label {
  display: block;
  margin-top: 10px;
  margin-bottom: 5px;
  font-weight: bold;
}

.note-form input,
.note-form textarea {
  width: 100%;
  padding: 10px;
  box-sizing: border-box;
  margin-bottom: 10px;
}

.note-form textarea {
  height: 100px;
  resize: vertical;
}

.note-form button {
  padding: 10px 20px;
  cursor: pointer;
}
```

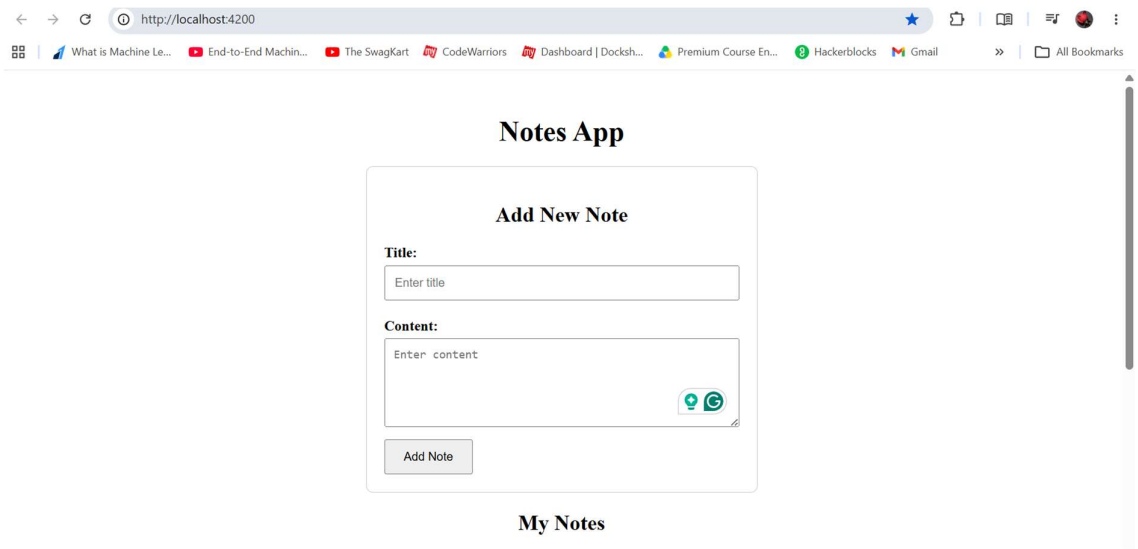

My Notes

2211

whwsidhqoaaq

Update Delete

rehh

ww

Update Delete