

DATA FORMATS IN NGS INTRODUCTION TO GALAXY

Bioinformàtica per a la Recerca Biomèdica

Mireia Ferrer¹, Álex Sánchez^{1,2}
Esther Camacho¹, Angel Blanco^{1,2}

1 Unitat d'Estadística i Bioinformàtica (UEB) VHIR

2 Departament de Genètica, Microbiologia i Estadística, UB

1. Data formats used in NGS

2. Introduction to Galaxy

1. Data formats used in NGS

2. Introduction to Galaxy

1. Data formats used in NGS

There are many different types of file formats depending on:

- Type of information they contain
 - Raw Sequence files
 - Co-ordinate files
 - Parameter files
 - Annotation files
 - Metadata files
- Sequencing platform
- Analysis stage
- Data source


NGS data are analyzed in three stages

General




Primary Analysis
run / sample quality

Application Specific



Secondary Analysis
sample quality / information

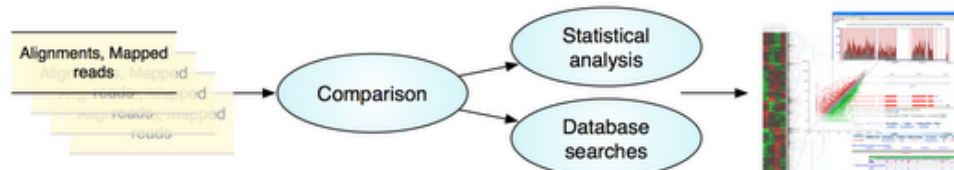

Tertiary Analysis
science

1. Data formats used in NGS

- Formats are designed to hold sequence data and other information about sequence
- All Sequence formats are ASCII text containing sequence ID, Quality Scores, Annotation details, comments, and other descriptions about sequence

1. Data formats used in NGS

FASTA format

- FASTA format is a text-based format for representing either nucleotide sequences or peptide sequences, in which base pairs or amino acids are represented using single-letter codes
- Header line starts with “>” followed by a sequence ID, and followed by lines of sequence data

```
>NG_016798.2 Homo sapiens DNA polymerase alpha 1, catalytic subunit (POLA1), RefSeqGene on chromosome X
```

```
CCCTCAGTTGGTGCCAGTAACTGTTGTTCCCTTCTTTGTGCCATTTGTAAGTCAATGTTTACCTCCCACT  
TATAAGTGAGAACATGTGGTATTTGGTTTTCTGTTCTATGTTAGTTCGCTTAGGATAATGGCTTCCAAC  
TCCATCCATGTTGCTGCAGACGTGATCTCATTCTTTTTTTTTTTTTTTTTTTTGGAGACAGAGTCGTGCTC  
TGTCGCCCAGGCTGGAGTGCAGTGGTGCATCTCGGCTCACTGCAACCTCTGCCTCCTGGGTTGAAGTGA  
CTCTCCTGGTTACGCTCCTGAGTAGCTAGGATTATAGGTGCCCCGCCACCATGCCTGGCTAATTTTTGTA  
TTTTTAGTAGAGATGGGGTTTTGCCATGTTGGCCAGGCTGATCTCGAACTCCTGACCTCAGGTGATCTGC  
CCACCCAGAGTGCCCTCCCAAAGTGTGGGAATACAGGCGTGAGCCACTGCACCTGGTTTCTTTTTATG  
GCTGTAAATTAGTTCACCATTTGTGAAGACAGTGTGGTGATTACATAAAAGTAGAAGTCTAAGAATCA  
AACCTTAAGTCTGACTCTACCTGAGTCTTTAATCCTTCCAATATAATATTAAAGAGGACAAATTATAAAC  
AAAAAGAGTCTATAATTCTATCATCCTGGCAAAATATACTCCATTTTGCATATTGCTTTAGGTAATAA
```

```
>NP_001365232.1 DNA polymerase alpha catalytic subunit isoform 3 [Homo sapiens]  
MAPVHGDDCEIGASALSDSGSFVSSRRREKKSKKGRQEALERLKKAKAGEKYKYEVEDFTGVYEEVDDE  
QYSKLVQARQDDDWIVDDDGIGYVEDGREIFDDLEDDALDADEKKGDKARNKDKRNVKKLAVTKPNNI  
KSMFIACAGKKTADKAVDLKDGLLGDILQDLNTETPQITPPPVMIKKKRSIGASPNPFSVHTATAVPS  
GKIASPVSRKEPPLTPVPLKRAEFAGDDVQVESTEEQESGAMEFEDGDFDEPMEVEVDLEPMAAKAWD  
KESEPAEEVKQEADSGKGTVSYLGSFLPDVSCWDIDQEGDSSFSVQEVQVDSSHLPLVKGADEEQVFHFY  
WLDAYEDQYNQPGVVFLFGKVVIESAETHVSCCMVKNIERTLYFLPREMKIDLNTGKETGTPISMKDVI  
EEFDEKIATKYKIMFKSKAEMPQLPQDLKGETFSHVFGTNTSSLELFLMNRKIKGPCWLEVKSPQLLNQ  
PVSWKVEAMALKPDLVNVIKDVSPPLVWMAFSMTMQNAKNHQNEIIAAMALVHHSFALDKAAPKPPF  
QSHFCVVSFKPKDCIFPYAFKEVIEKKNVKVEVAATERLLGFFLAKVHKIDPDIIIGHNIYGFLEVLQ  
RINVCKAPHWSKIGRLKRSNMPKLGGRSGFGERNATCGRMICDVEISAKELIRCKSYHLSLVQIILKTE
```

1. Data formats used in NGS

FASTQ format

- Output of most actual sequencing platforms for raw data
- A text-based format for storing both a **nucleotide sequence** and its corresponding **quality scores**
- Standard file extension for a FASTQ file are .fq and .fastq
- FASTQ files are uncompressed and quite large because they contain the following information for every single sequencing read.
- Compressed files are also possible: fastq.gz

1. Data formats used in NGS

FASTQ format

- File structure. 4 lines:
 - @ followed by the read ID and possibly information about the sequencing run
 - sequenced bases
 - + (perhaps followed by the read ID again, or some other description)
 - quality scores for each base of the sequence (ASCII-translated Phred scores)

```
@Seq description
GATTTGGGGTTCAAAGCAGTATCGATCAAATAGTAAATCCATTTGTTCAACTCACAGTTT
+
!''*( (( (***) ) %%%++) (%%%) .1***-+*'') **55CCF>>>>>CCCCCCC65
```


1. Data formats used in NGS

FASTQ format

Phred Scores

- Sequencing systems assign quality scores to each peak, that represents the error probability that an individual base call is incorrect.
- Phred scores provide log(10)-transformed error probability values:

If p is probability that the base call is wrong the Phred score is $Q = -10 \cdot \log_{10} p$

PHRED Quality Score	Probability of incorrect base call	Base call accuracy
10	1 in 10	90 %
20	1 in 100	99 %
30	1 in 1000	99.9 %
40	1 in 10000	99.99 %
50	1 in 100000	99.999 %

1. Data formats used in NGS

- The base calling (A, T, G or C) is performed based on Phred scores.
- Ambiguous positions with Phred scores ≤ 20 are labeled with N.
- To assign each base a unique score identifier (instead of numbers of varying character length), Phred scores are typically represented as ASCII characters.
- Different sequencing platforms may use different ASCII ranges for Phred encoding

Description	ASCII characters		Quality score	
	Range	Offset	Type	Range
Solexa/early Illumina (1.0)	59 to 126 (; to ~)	64	Solexa	-5 to 62
Illumina 1.3+	64 to 126 (@ to ~)	64	Phred	0 to 62
Sanger standard/Illumina 1.8+	33 to 126 (! to ~)	33	Phred	0 to 93

Base call quality scores are represented with the Phred range. Different Illumina (formerly Solexa) versions used different scores and ASCII offsets. Starting with Illumina format 1.8, the score now represents the standard Sanger/Phred format that is also used by other sequencing platforms and the sequencing archives.

1. Data formats used in NGS

SAM / BAM formats

- The **Sequence Alignment/Map (SAM)** format is a generic nucleotide alignment format that describes the alignment of sequencing reads to a reference.
- SAM files typically contain:
 - a short header section with information about the genomic loci of each read
 - a very long alignment section where each row represents a single read alignment.
 - Each alignment line has 11 mandatory fields for essential alignment information such as mapping position, and variable number of optional fields for flexible or aligner specific information

<https://samtools.github.io/hts-specs/SAMv1.pdf>

1. Data formats used in NGS

Mandatory Alignment Section Fields

Position	Field	Description
1	QNAME	Query template (or read) name
2	FLAG	Information about read mapping (see next section)
3	RNAME	Reference sequence name. This should match a @SQ line in the header.
4	POS	1-based leftmost mapping position of the first matching base. Set as 0 for an unmapped read without coordinate.
5	MAPQ	Mapping quality of the alignment. Based on base qualities of the mapped read.
6	CIGAR	Detailed information about the alignment (see relevant section).
7	RNEXT	Used for paired end reads. Reference sequence name of the next read. Set to “=” if the next segment has the same name.
8	PNEXT	Used for paired end reads. Position of the next read.
9	TLEN	Observed template length. Used for paired end reads and is defined by the length of the reference aligned to.
10	SEQ	The sequence of the aligned read.
11	QUAL	ASCII of base quality plus 33 (same as the quality string in the Sanger FASTQ format).
12	OPT	Optional fields (see relevant section).

1. Data formats used in NGS

```
@HD VN:1.6 SO:coordinate
@SQ SN:ref LN:45
r001 99 ref 7 30 8M2I4M1D3M = 37 39 TTAGATAAAGGATACTG *
r002 0 ref 9 30 3S6M1P1I4M * 0 0 AAAAGATAAGGATA *
r003 0 ref 9 30 5S6M * 0 0 GCCTAAGCTAA * SA:Z:ref,29,-,6H5M,17,0;
r004 0 ref 16 30 6M14N5M * 0 0 ATAGCTTCAGC *
r003 2064 ref 29 17 6H5M * 0 0 TAGGC * SA:Z:ref,9,+,5S6M,30,1;
r001 147 ref 37 30 9M = 7 -39 CAGCGGCAT * NM:i:1
```

1. Data formats used in NGS

SAM / BAM formats

- A **BAM file** is a binary version of a SAM file.
- Both contain identical information about reads and their mapping.
- A BAM file requires a header but a SAM file may not have one.
- Many operations (such as sorting and indexing) work only on BAM files.
- For almost any application that requires SAM input, this can be created on the fly from a BAM,
- BAM files take up much less space than SAM files.
- For archiving purposes, keep only the BAM file. The SAM file can easily be regenerated (if ever needed).

1. Data formats used in NGS

BED / GFF / GTF formats

- Formats for genome annotations
- One line per genomic feature
- The **BED format** is the simplest way to store annotation tracks. It has three required fields (chromosome, start, end) and up to 9 optional fields (name, score, strand, thickStart, thickEnd, itemRgb, blockCount, blockSizes, blockStarts).

```
# 6-column BED file defining transcript loci
chr1 66999824 67210768 NM_032291 0 +
chr1 33546713 33586132 NM_052998 0 +
chr1 25071759 25170815 NM_013943 0 +
chr1 48998526 50489626 NM_032785 0 -
```

1. Data formats used in NGS

BED / GFF / GTF formats

- The **General Feature Format (GFF)** and **General Transfer Format (GTF)** has nine required fields; the first three fields form the basic name, start, end tuple that allows for the identification of the location in respect to the reference genome.

Sample GTF output from Ensembl data dump:

```
1 transcribed_unprocessed_pseudogene gene 11869 14409 . + . gene_id "ENSG00000223972"; gene_name "DDX11L1"; gene_source "havana"; gene_biotype "transcribed_unprocessed_pseudogene";
1 processed_transcript transcript 11869 14409 . + . gene_id "ENSG00000223972"; transcript_id "ENST00000456328"; gene_name "DDX11L1"; gene_source "havana"; gene_biotype "transcript"
```

Sample GFF output from Ensembl export:

```
X Ensembl Repeat 2419108 2419128 42 . . hid=trf; hstart=1; hend=21
X Ensembl Repeat 2419108 2419410 2502 - . hid=AluSx; hstart=1; hend=303
X Ensembl Repeat 2419108 2419128 0 . . hid=dust; hstart=2419108; hend=2419128
X Ensembl Pred.trans. 2416676 2418760 450.19 - 2 genscan=GENSCAN00000019335
X Ensembl Variation 2413425 2413425 . + .
X Ensembl Variation 2413805 2413805 . + .
```


1. Data formats used in NGS

1. **reference sequence:** coordinate system of the annotation (e.g., "Chr1")
2. **source:** describes how the annotation was derived (e.g., the name of the annotation software)
3. **method:** annotation type (e.g., gene)
4. **start position:** 1-based integer, always less than or equal to the stop position
5. **stop position:** for zero-length features, such as insertion sites, start equals end and the implied site is to the right of the indicated base
6. **score:** e.g., sequence identity
7. **strand:** "+" for the forward strand, "-" for the reverse strand, or "." for annotations that are not stranded
8. **phase:** codon phase for annotations linked to proteins; 0, 1, or 2, indicating the frame, or the number of bases that should be removed from the beginning of this feature to reach the first base of the next codon
9. **group:** contains the class and ID of an annotation which is the logical parent of the current one ("feature is composed of")

1. Data formats used in NGS

VCF format

- Variant Call Format (VCF) is a text file format.
- It contains meta-information lines, a header line, and then data lines each containing information about a position in the genome.
- Also has the ability to contain genotype information on samples for each position.
- The header line names the 8 fixed, mandatory columns.
 1. #CHROM
 2. POS
 3. ID
 4. REF
 5. ALT
 6. QUAL
 7. FILTER
 8. INFO

1. Data formats used in NGS

```
##fileformat=VCFv4.2
##fileDate=20090805
##source=myImputationProgramV3.1
##reference=file:///seq/references/1000GenomesPilot-NCBI36.fasta
##contig=<ID=20,length=62435964,assembly=B36,md5=f126cdf8a6e0c7f379d618ff66beb2da,species="Homo sapiens",taxonomy=x>
##phasing=partial
##INFO=<ID=NS,Number=1,Type=Integer,Description="Number of Samples With Data">
##INFO=<ID=DP,Number=1,Type=Integer,Description="Total Depth">
##INFO=<ID=AF,Number=A,Type=Float,Description="Allele Frequency">
##INFO=<ID=AA,Number=1,Type=String,Description="Ancestral Allele">
##INFO=<ID=DB,Number=0,Type=Flag,Description="dbSNP membership, build 129">
##INFO=<ID=H2,Number=0,Type=Flag,Description="HapMap2 membership">
##FILTER=<ID=q10,Description="Quality below 10">
##FILTER=<ID=s50,Description="Less than 50% of samples have data">
##FORMAT=<ID=GT,Number=1,Type=String,Description="Genotype">
##FORMAT=<ID=GQ,Number=1,Type=Integer,Description="Genotype Quality">
##FORMAT=<ID=DP,Number=1,Type=Integer,Description="Read Depth">
##FORMAT=<ID=HQ,Number=2,Type=Integer,Description="Haplotype Quality">
#CHROM POS ID REF ALT QUAL FILTER INFO FORMAT NA000001 NA000002 NA000003
20 14370 rs6054257 G A 29 PASS NS=3;DP=14;AF=0.5;DB;H2 GT:GQ:DP:HQ 0|0:48:1:51,51 1|0:48:8:51,51 1/1:43:5:.,.
20 17330 . T A 3 q10 NS=3;DP=11;AF=0.017 GT:GQ:DP:HQ 0|0:49:3:58,50 0|1:3:5:65,3 0/0:41:3
20 1110696 rs6040355 A G,T 67 PASS NS=2;DP=10;AF=0.333,0.667;AA=T;DB GT:GQ:DP:HQ 1|2:21:6:23,27 2|1:2:0:18,2 2/2:35:4
20 1230237 . T . 47 PASS NS=3;DP=13;AA=T GT:GQ:DP:HQ 0|0:54:7:56,60 0|0:48:4:51,51 0/0:61:2
20 1234567 microsat1 GTC G,GTCT 50 PASS NS=3;DP=9;AA=G GT:GQ:DP 0/1:35:4 0/2:17:2 1/1:40:3
```

<https://samtools.github.io/hts-specs/VCFv4.2.pdf>

1. Data formats used in NGS

To sum up

- **Raw data:** .fastq (.fastq.gz)
- **Aligned data:** .sam / .bam
- **Annotation data:** .gtf / .gff / .bed
- **Results data:** .vcf