
Tadk3

1.

运行结果.

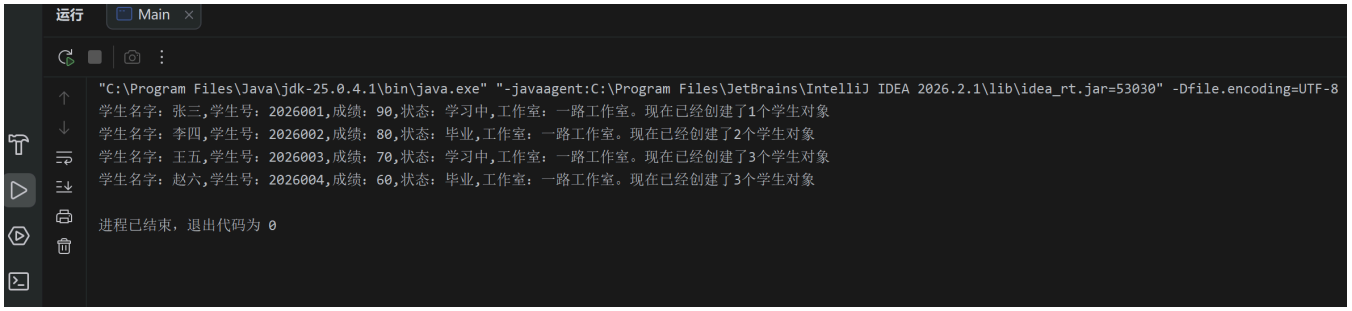


```
package Task3;

public class Main {
    public static void main(String[] args) {
        //创建对象
        Student student1 = new Student("张三", 90, StudentStatus.STUDYING, "2026001");
        System.out.println(student1);
        Student student2 = new Student("李四", 80, StudentStatus.GRADUATED, "2026002");
        System.out.println(student2);
        Student student3 = new Student("王五", 70, StudentStatus.STUDYING, "2026003");
        System.out.println(student3);
        //修改其中的属性
        student3.setStatus(StudentStatus.GRADUATED);
        student3.setName("赵六");
        student3.setScore(60);
        student3.setStudentId("2026004");
        System.out.println(student3);
    }
}
```

```
package Task3;

public enum StudentStatus {
    STUDYING("学习中"), GRADUATED("毕业");
    private String status;
//    重写toString方法返回status值
    @Override
    public String toString() {
            return status;
    }

    StudentStatus(String status) {
        this.status = status;
    }
```

```
    public String getStatus() {
        return status;
    }

    public void setStatus(String status) {
        this.status = status;
    }
}
```

```
package Task3;

public class Student {
    private String studentId;
    private String name;
    private int score;
    private StudentStatus status;
    private static int count=0;
    private static final String  STUDIO_NAME="一路工作室";

//    重写toString方法
    @Override
    public String toString(){
        return "学生名字："+name+",学生号："+studentId+",成绩："+score+",状态："+status
               +",工作室："+STUDIO_NAME+"。现在已经创建了"+count+"个学生对象";
    }

    public static int getCount() {
        return count;
    }

    public static void setCount(int count) {
        Student.count = count;
    }

    public Student(String name, int score, StudentStatus status, String studentId) {
        this.name = name;
        this.score = score;
        this.status = status;
        this.studentId = studentId;
        count++;
    }

    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }

    public int getScore() {
```

```
        return score;
    }

    public void setScore(int score) {
        this.score = score;
    }

    public StudentStatus getStatus() {
        return status;
    }

    public void setStatus(StudentStatus status) {
        this.status = status;
    }

    public String getStudentId() {
        return studentId;
    }

    public void setStudentId(String studentId) {
        this.studentId = studentId;
    }
}
```

2

1.

- 类是模板，里面包括属性和行为；
- 对象是根据类实实在在创建出来的，在堆中；
  2.this解决了形参名字和成员变量的名字一样的情况，this表示对象，可以直接调用成员变量、方法
  3.
- 修饰变量：表示变成了常量，之后不能修改了；
- 修饰方法：表示不能再次重写；
- 修饰类：表示不能被继承了；
  都表示最后一次，不能再次