

```
In [39]: # step 1 import libraries
import warnings
from pathlib import Path

import matplotlib.pyplot as plt
import pandas as pd
from pandas.api.types import import is_numeric_dtype
from sklearn.ensemble import RandomForestClassifier
from sklearn.metrics import (
    accuracy_score,
    classification_report,
    confusion_matrix,
    f1_score,
    precision_score,
    recall_score,
)
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import LabelEncoder, StandardScaler
from sklearn.svm import SVC
from sklearn.tree import DecisionTreeClassifier

warnings.filterwarnings("ignore")

pd.set_option("display.max_columns", None)
pd.set_option("display.width", 120)
```

```
In [40]: # step 2 load mobile dataset

file_path = Path("data/mobile-info.xlsx")
if not file_path.exists():
    raise FileNotFoundError("data/mobile-info.xlsx not found in experiment-1

df = pd.read_excel(file_path)
df.columns = df.columns.str.strip().str.replace(" ", "_", regex=False)

df.shape, list(df.columns), df.head(5)
```

```
Out[40]: ((491, 7),
          ['Product_Name',
           'Seller_Name',
           'Overall_Rating',
           'Overall_Review',
           'Seller_Rating',
           'Average_Rating',
           'Product_Quality'],
          Product_Name      Seller_Name Overall_Rating Overall_Review Sel
ler_Rating Average_Rating Product_Quality
0 RedmiNote6Pro FlashstarCommerce 352708 32857
4.7 4.4 Excellent
1 RedmiNote6Pro SuperComNet 352708 32857
4.3 4.1 Excellent
2 RedmiNote7 SuperComNet 10387 1057
4.3 4.6 Excellent
3 RedmiY1 samaymobiles 17421 1634
3.1 3.7 Good
4 RedmiNote6Pro FlashstarCommerce 72964 7073
4.3 4.3 Excellent)
```

```
In [41]: # step 3 inspect schema and target column

print(df.info())

schema = pd.DataFrame({
    "Column": df.columns,
    "Data Type": df.dtypes.astype(str).values,
    "Null Count": df.isna().sum().values,
    "Unique Values": df.nunique().values,
})

schema

# target variable for classification
if "Product_Quality" in df.columns:
    target_col = "Product_Quality"
else:
    target_col = df.columns[-1]

class_distribution = df[target_col].value_counts(dropna=False).sort_values(ascending=False)


plt.figure(figsize=(8, 4))
class_distribution.head(10).plot(kind="bar", legend=False, ax=plt.gca())
plt.title(f"Top Classes in {target_col}")
plt.ylabel("Count")
plt.xlabel(target_col)
plt.xticks(rotation=25, ha="right")
plt.tight_layout()
plt.show()

class_distribution
```

```

<class 'pandas.DataFrame'>
RangeIndex: 491 entries, 0 to 490
Data columns (total 7 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Product_Name          491 non-null   str
1   Seller_Name           491 non-null   str
2   Overall_Rating        491 non-null   int64
3   Overall_Review        491 non-null   int64
4   Seller_Rating         491 non-null   float64
5   Average_Rating        491 non-null   float64
6   Product_Quality       491 non-null   str
dtypes: float64(2), int64(2), str(3)
memory usage: 27.0 KB
None

```

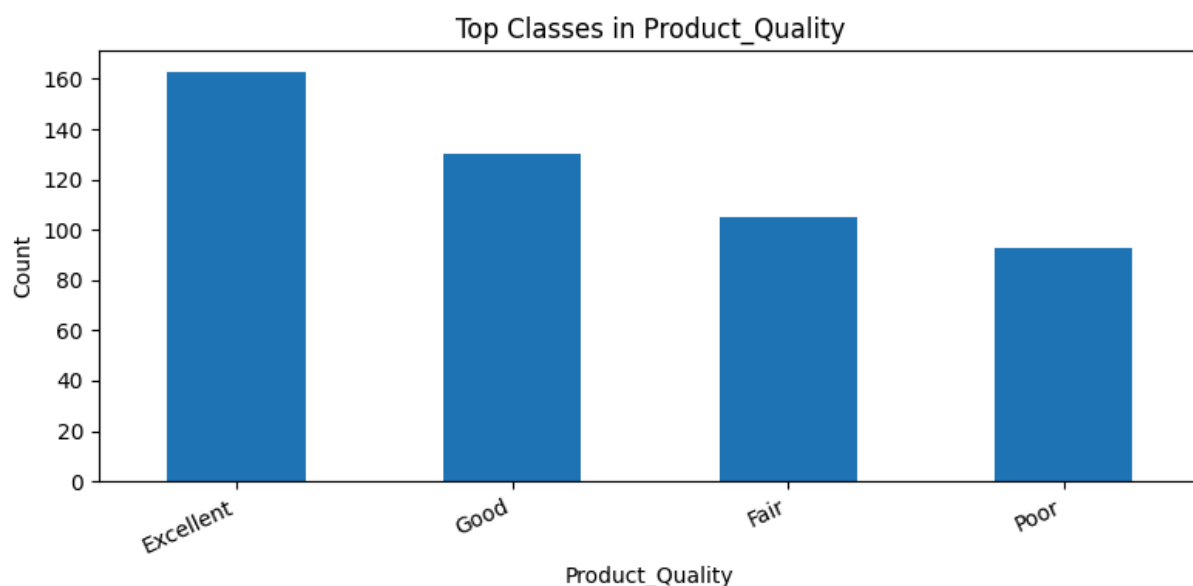

Out[41]:

Count	
Product_Quality	
Excellent	163
Good	130
Fair	105
Poor	93

In [42]: *# step 4 clean data and encode categorical columns*

```

df = df.drop_duplicates().copy()

# remove hidden non-breaking spaces that appear in some values
for column in df.columns:
    if not is_numeric_dtype(df[column]):
        df[column] = df[column].astype("string").str.replace("\xa0", " ", re

encoders = {}

```

```

for column in df.columns:
    if is_numeric_dtype(df[column]):
        df[column] = df[column].fillna(df[column].median())
    else:
        # try numeric conversion for mixed text/number columns
        numeric_candidate = pd.to_numeric(df[column], errors="coerce")
        if numeric_candidate.notna().mean() >= 0.9:
            df[column] = numeric_candidate.fillna(numeric_candidate.median())
        else:
            mode_value = df[column].mode(dropna=True)
            fill_value = mode_value.iloc[0] if not mode_value.empty else "Ur
            df[column] = df[column].fillna(fill_value)
            encoder = LabelEncoder()
            df[column] = encoder.fit_transform(df[column].astype(str))
            encoders[column] = encoder

clean_summary = pd.DataFrame({
    "Metric": ["Rows after cleaning", "Columns", "Missing values", "Encoded
    "Value": [len(df), df.shape[1], int(df.isna().sum().sum()), len(encoders
})

clean_summary

df.head(5)

```

Out[42]:

	Product_Name	Seller_Name	Overall_Rating	Overall_Review	Seller_Rating	Averag
--	--------------	-------------	----------------	----------------	---------------	--------

0	12	1	352708	32857	4.7	
1	12	13	352708	32857	4.3	
2	13	13	10387	1057	4.3	
3	14	21	17421	1634	3.1	
4	12	1	72964	7073	4.3	

In [43]: # step 5 select features and split into training and testing sets

```

X = df.drop(columns=[target_col])
y = df[target_col]

X_train, X_test, y_train, y_test = train_test_split(
    X,
    y,
    test_size=0.3,
    random_state=42,
    stratify=y if y.nunique() > 1 else None,
)

print("Training shape:", X_train.shape)
print("Testing shape:", X_test.shape)
print("Target classes:", y.nunique())

```

Training shape: (158, 6)

Testing shape: (68, 6)

Target classes: 4

In [44]: *# step 6 define evaluation helper and train decision tree classifier*

```
def evaluate_model(model, x_test, y_test, model_name):
    y_pred = model.predict(x_test)
    accuracy = accuracy_score(y_test, y_pred)
    precision = precision_score(y_test, y_pred, average="weighted", zero_div
    recall = recall_score(y_test, y_pred, average="weighted", zero_division=
    f1 = f1_score(y_test, y_pred, average="weighted", zero_division=0)
    cm = confusion_matrix(y_test, y_pred)
    report = classification_report(y_test, y_pred, zero_division=0)

    print(model_name)
    print("Accuracy:", accuracy)
    print("Precision:", precision)
    print("Recall:", recall)
    print("F1 Score:", f1)
    print("confusion matrix")
    print(cm)
    print(report)

    plt.figure(figsize=(5, 4))
    plt.imshow(cm, cmap="Blues", aspect="auto")
    plt.title(f"{model_name} - Confusion Matrix")
    plt.colorbar()
    plt.xlabel("Predicted")
    plt.ylabel("Actual")
    plt.tight_layout()
    plt.show()

    return {
        "model_name": model_name,
        "y_pred": y_pred,
        "accuracy": accuracy,
        "precision": precision,
        "recall": recall,
        "f1_score": f1,
        "confusion_matrix": cm,
        "classification_report": report,
    }

dt_model = DecisionTreeClassifier(random_state=42)
dt_model.fit(X_train, y_train)
decision_tree_results = evaluate_model(dt_model, X_test, y_test, "Decision 1
```

Decision Tree Classifier

Accuracy: 1.0

Precision: 1.0


Recall: 1.0

F1 Score: 1.0

confusion matrix

```
[[28  0  0  0]
 [ 0  9  0  0]
 [ 0  0 22  0]
 [ 0  0  0  9]]
```

	precision	recall	f1-score	support
0	1.00	1.00	1.00	28
1	1.00	1.00	1.00	9
2	1.00	1.00	1.00	22
3	1.00	1.00	1.00	9
accuracy			1.00	68
macro avg	1.00	1.00	1.00	68
weighted avg	1.00	1.00	1.00	68

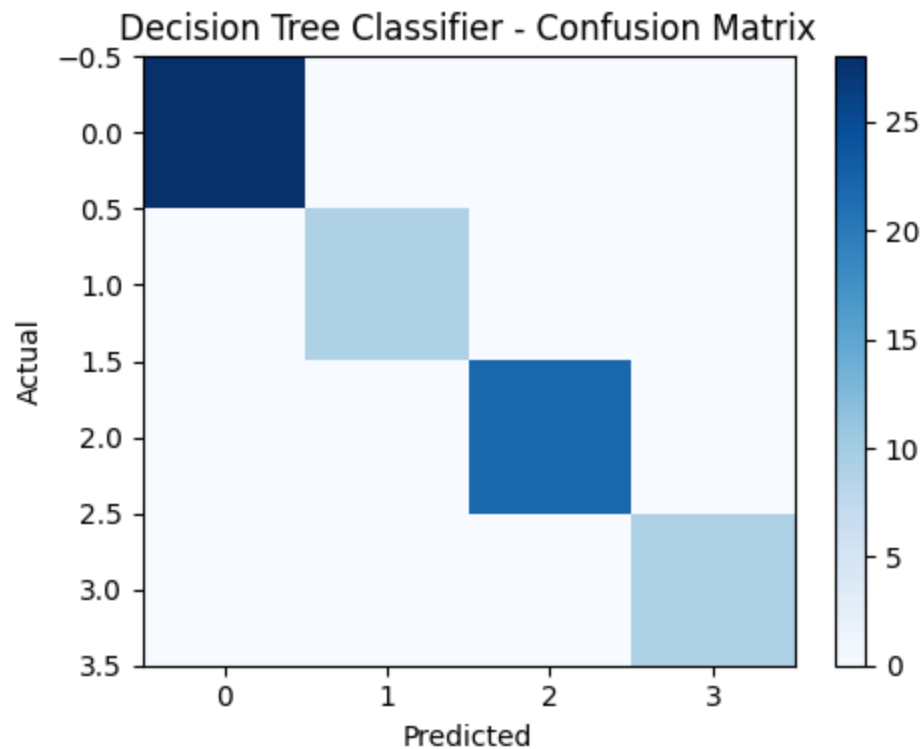

In [45]: *# step 7 train random forest classifier*


```
rf_model = RandomForestClassifier(n_estimators=200, random_state=42)
rf_model.fit(X_train, y_train)
random_forest_results = evaluate_model(rf_model, X_test, y_test, "Random For
```

Random Forest Classifier
 Accuracy: 0.9264705882352942
 Precision: 0.9290441176470587
 Recall: 0.9264705882352942
 F1 Score: 0.9271079949007467

confusion matrix

```
[[28  0  0  0]
 [ 0  7  1  1]
 [ 0  1 21  0]
 [ 0  2  0  7]]
```

	precision	recall	f1-score	support
0	1.00	1.00	1.00	28
1	0.70	0.78	0.74	9
2	0.95	0.95	0.95	22
3	0.88	0.78	0.82	9
accuracy			0.93	68
macro avg	0.88	0.88	0.88	68
weighted avg	0.93	0.93	0.93	68

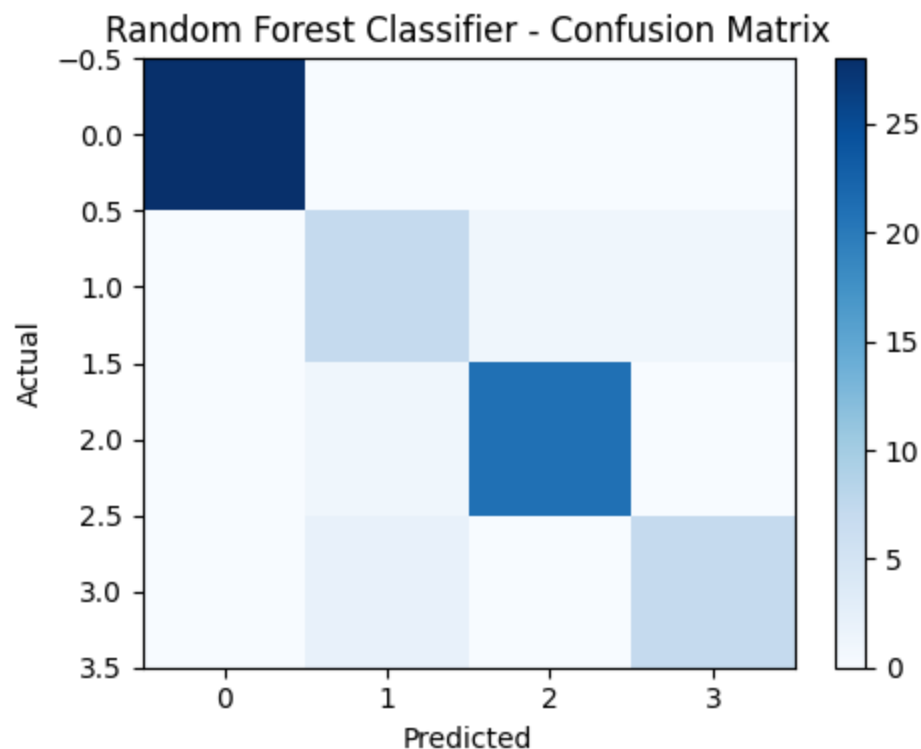

```
In [46]: # step 8 train support vector machine classifier

scaler = StandardScaler()
X_train_scaled = scaler.fit_transform(X_train)
X_test_scaled = scaler.transform(X_test)

svm_model = SVC(kernel="rbf", gamma="scale", random_state=42)
svm_model.fit(X_train_scaled, y_train)
svm_results = evaluate_model(svm_model, X_test_scaled, y_test, "Support Vect
```

Support Vector Machine Classifier

Accuracy: 0.8823529411764706

Precision: 0.8941628959276017


Recall: 0.8823529411764706

F1 Score: 0.8847413549215469

confusion matrix

```
[[24  0  4  0]
 [ 0  8  1  0]
 [ 1  1 20  0]
 [ 0  0  1  8]]
```

	precision	recall	f1-score	support
0	0.96	0.86	0.91	28
1	0.89	0.89	0.89	9
2	0.77	0.91	0.83	22
3	1.00	0.89	0.94	9
accuracy			0.88	68
macro avg	0.90	0.89	0.89	68
weighted avg	0.89	0.88	0.88	68

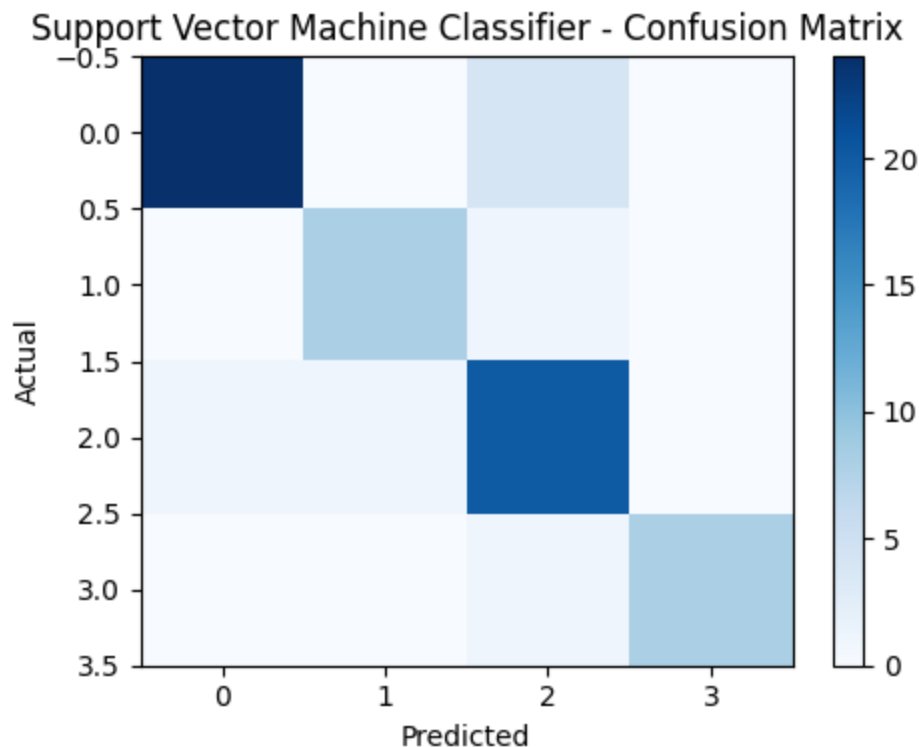

```
In [47]: # step 9 compare all models with common metrics
```

```
comparison_df = pd.DataFrame([
    {
        "Model": decision_tree_results["model_name"],
        "Accuracy": decision_tree_results["accuracy"],
        "Precision": decision_tree_results["precision"],
        "Recall": decision_tree_results["recall"],
        "F1 Score": decision_tree_results["f1_score"],
    },
    {
```



```


        "Model": random_forest_results["model_name"],
        "Accuracy": random_forest_results["accuracy"],
        "Precision": random_forest_results["precision"],
        "Recall": random_forest_results["recall"],
        "F1 Score": random_forest_results["f1_score"],
    },
    {
        "Model": svm_results["model_name"],
        "Accuracy": svm_results["accuracy"],
        "Precision": svm_results["precision"],
        "Recall": svm_results["recall"],
        "F1 Score": svm_results["f1_score"],
    },
]

comparison_df = comparison_df.sort_values(["Accuracy", "F1 Score"], ascending=False)

plt.figure(figsize=(8, 5))
comparison_df.set_index("Model")["Accuracy", "Precision", "Recall", "F1 Score"].plot()
plt.title("Model Comparison on Mobile Dataset")
plt.ylabel("Score")
plt.ylim(0, 1.05)
plt.xticks(rotation=20, ha="right")
plt.grid(axis="y", linestyle=":", linewidth=0.6)
plt.tight_layout()
plt.show()

best_model = comparison_df.iloc[0]
print("Best model:", best_model["Model"])
print("Best accuracy:", best_model["Accuracy"])
print("Best F1 score:", best_model["F1 Score"])

```

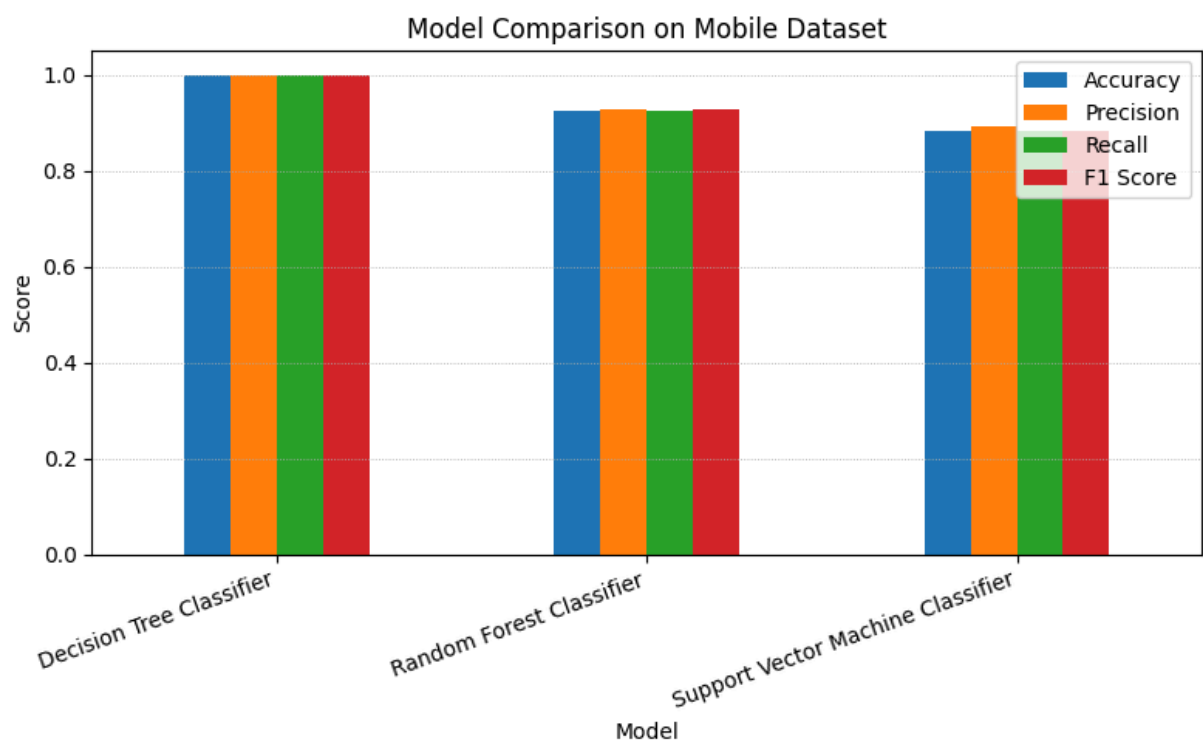

Best model: Decision Tree Classifier
Best accuracy: 1.0
Best F1 score: 1.0

In [48]: *# step 10 prediction demo and output validation*

```
validation_results = pd.DataFrame({
    "Actual": y_test.reset_index(drop=True),
    "Decision Tree": decision_tree_results["y_pred"],
    "Random Forest": random_forest_results["y_pred"],
    "SVM": svm_results["y_pred"],
})

validation_results.head(10)
```

Out[48]:

	Actual	Decision Tree	Random Forest	SVM
--	--------	---------------	---------------	-----

0	1	1	1	1
1	1	1	2	1
2	2	2	2	2
3	0	0	0	0
4	3	3	3	3
5	0	0	0	0
6	2	2	2	2
7	2	2	2	2
8	0	0	0	2
9	0	0	0	0

In [49]: *# step 11 final output tables in notebook*

```
print("Model comparison table")
comparison_df

print("Prediction validation table (first 20 rows)")
validation_results.head(20)
```

Model comparison table
Prediction validation table (first 20 rows)

Out [49]:

	Actual	Decision Tree	Random Forest	SVM
0	1	1	1	1
1	1	1	2	1
2	2	2	2	2
3	0	0	0	0
4	3	3	3	3
5	0	0	0	0
6	2	2	2	2
7	2	2	2	2
8	0	0	0	2
9	0	0	0	0
10	0	0	0	0
11	2	2	2	2
12	2	2	2	2
13	2	2	2	2
14	3	3	3	3
15	2	2	2	2
16	2	2	2	2
17	3	3	3	2
18	3	3	3	3
19	0	0	0	0

In []: