


# CSS 만들고입히기

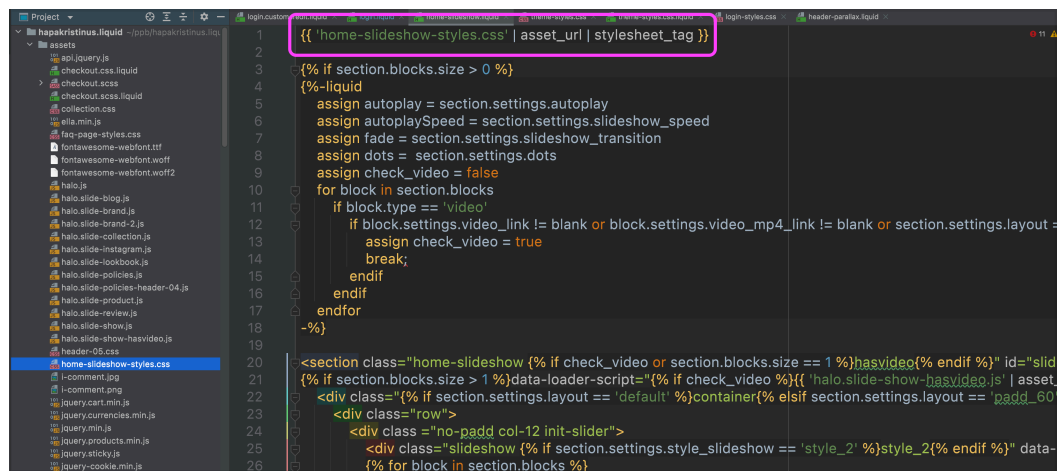

The screenshot shows a web editor interface with a file explorer on the left and a code editor on the right. The file explorer lists various files, including 'home-slideshow-styles.css'. The code editor displays a Liquid template with a highlighted tag at the top: `{{ 'home-slideshow-styles.css' | asset_url | stylesheet_tag }}`. Below this, the template contains Liquid logic for a slideshow, including assignments for settings and a loop over blocks. The code is written in a dark theme.

```
1 {{ 'home-slideshow-styles.css' | asset_url | stylesheet_tag }}
2
3 {% if section.blocks.size > 0 %}
4 {%-liquid
5   assign autoplay = section.settings.autoplay
6   assign autoplaySpeed = section.settings.slideshow_speed
7   assign fade = section.settings.slideshow_transition
8   assign dots = section.settings.dots
9   assign check_video = false
10  for block in section.blocks
11    if block.type == 'video'
12      if block.settings.video_link != blank or block.settings.video_mp4_link != blank or section.settings.layout == 'video'
13        assign check_video = true
14        break;
15      endif
16    endif
17  endfor
18 -%}
19
20 <section class="home-slideshow {% if check_video or section.blocks.size == 1 %}hasvideo{% endif %}" id="slideshow" data-cs="2" data-kind="parent" data-rs="2">
21   {% if section.blocks.size > 1 %}data-loader-script="{% if check_video %}{{ 'halo.slide-show-hasvideo.js' | asset_url }}{% else %}{{ 'halo.slide-show.js' | asset_url }}{% endif %}"{% endif %}
22   <div class="{% if section.settings.layout == 'default' %}container{% elsif section.settings.layout == 'padd_60' %}padd_60{% endif %}" data-kind="ghost">
23     <div class="row">
24       <div class="no-padd col-12 init-slider">
25         <div class="slideshow {% if section.settings.style_slideshow == 'style_2' %}style_2{% endif %}" data-cs="2" data-kind="parent" data-rs="2">
26           {% for block in section.blocks %}
```