

Création VM GLPI

Choisir
« unbutu
24.04.4 »

ISO
server

Create: Virtual Machine

General

OS

System

Disks

CPU

Memory

Network

Confirm

Node:

SRVDEPLOY-S4P2

Resource Pool:

SIO1

VM ID:

103

Name:

SRV-GLPI

Add to HA:

☐

Start at boot:

☐

Start/Shutdown order:

any

Startup delay:

default

Shutdown timeout:

default

Tags

No Tags +

Help

Advanced ☒

Back

Next

Create: Virtual Machine

General

OS

System

Disks

CPU

Memory

Network

Confirm

☒ Use CD/DVD disc image file (iso)

Storage: local

ISO image: ubuntu-24.04.4-live-se

Guest OS:

Type: Linux

Version: 6.x - 2.6 Kernel


☐ Use physical CD/DVD Drive

☐ Do not use any media

Advanced ☒


Back

Next

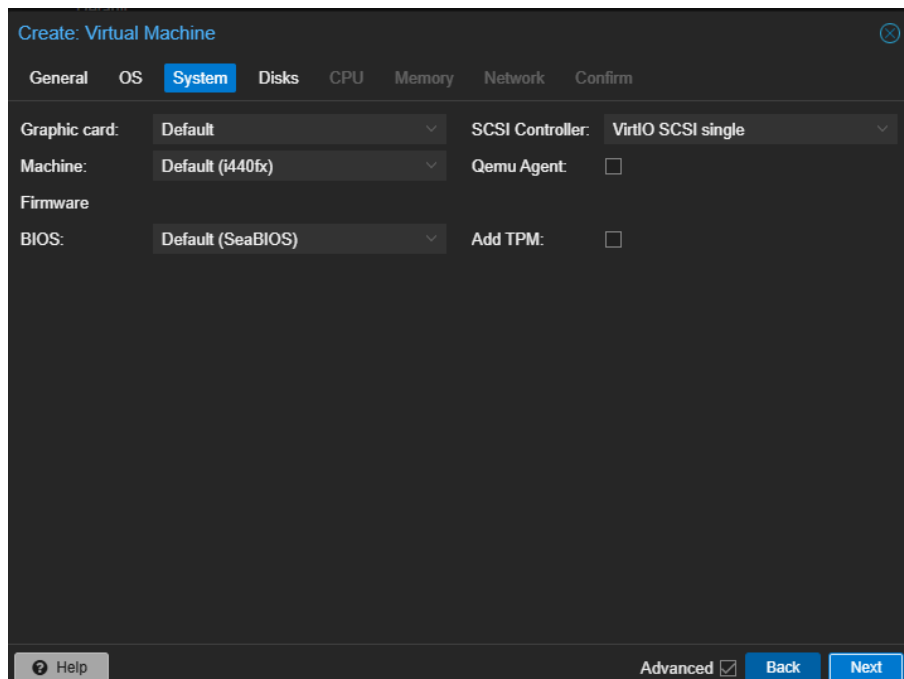

Cliquez sur Advanced , BUS/ DeviceSATA puis Disk size(Gib) 20

Et cocher la case SSD emulation

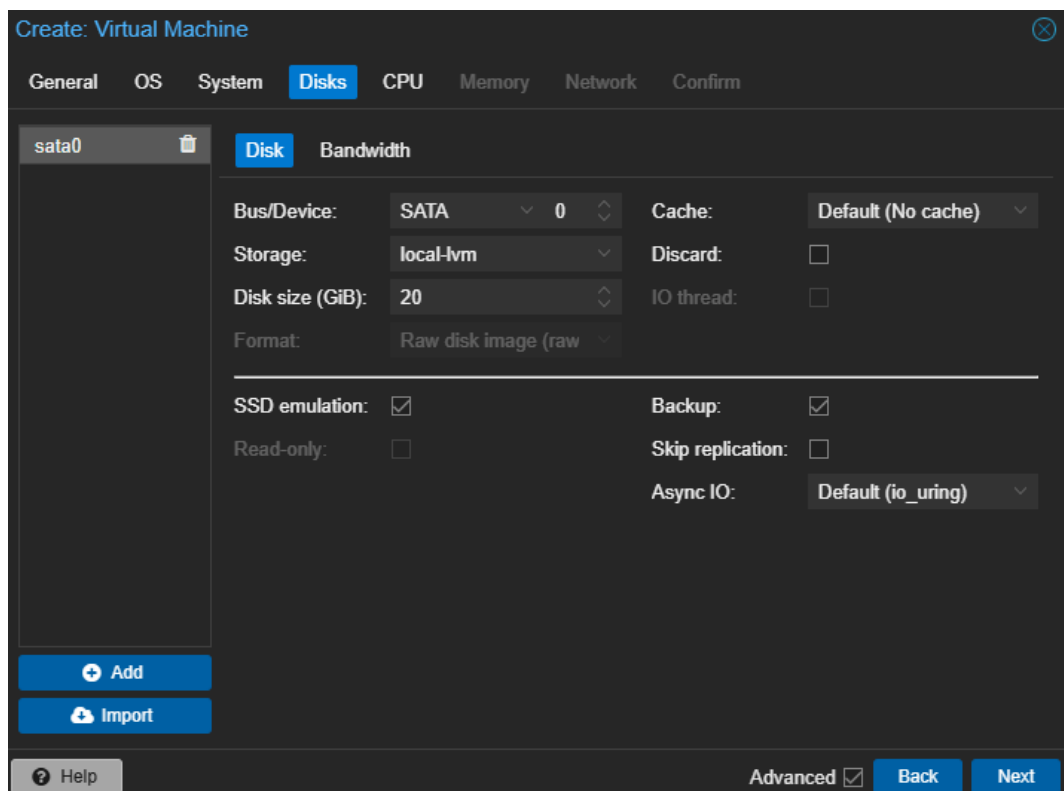

Create: Virtual Machine

General OS System Disks **CPU** Memory Network Confirm

Sockets: 1 Type: x86-64-v2-AES

Cores: 1 Total cores: 1

VCPUs: 1 CPU units: 100

CPU limit: unlimited Enable NUMA: ☐

CPU Affinity: All Cores

Extra CPU Flags:

Default	- ☐ ☒ ☐ ☐ +	nested-virt	Controls nested virtualization, namely 'svm' for AMD CPUs and 'vmx' for Intel CPUs. Live migration still only works if it's the same flag on both sides. For Windows, use a CPU model similar to the host, with the same vendor!
Default	- ☐ ☒ ☐ ☐ +	md-clear	Required to let the guest OS know if MDS is mitigated correctly.
Default	- ☐ ☒ ☐ ☐ +	pcid	Meltdown fix cost reduction on Westmere, Sandy-, and IvyBridge Intel CPUs.
Default	- ☐ ☒ ☐ ☐ +	spec-ctrl	Allows improved Spectre mitigation with Intel CPUs.
Default	- ☐ ☒ ☐ ☐ +	ssbd	Protection for 'Speculative Store Bypass' for Intel models.

Help Advanced ☒ Back Next

Memory(MiB) : 2 go

Create: Virtual Machine

General OS System Disks CPU **Memory** Network Confirm

Memory (MiB): 2048

Minimum memory (MiB): 2048

Shares: Default (1000)

Ballooning Device: ☒

Allow KSM: ☒

Help Advanced ☒ Back Next

Bridge il faut mettre vmbrSIO1

Create: Virtual Machine

General OS System Disks CPU Memory **Network** Confirm

☐ No network device

Bridge: vmbrSIO1 Model: VirtIO (paravirtualized)

VLAN Tag: no VLAN MAC address: auto

Firewall: ☒

Disconnect: ☐ Rate limit (MB/s): unlimited

MTU: Same as bridge Multiqueue:

? Help Advanced ☒ Back Next

Il faut faire FINISH

Create: Virtual Machine

General OS System Disks CPU Memory Network **Confirm**


Key ↑	Value
cores	1
cpu	x86-64-v2-AES
ide2	local:iso/ubuntu-24.04.4-live-server-amd64.iso,media=cdrom
memory	2048
name	SRV-GLPI
net0	virtio,bridge=vmbrSIO1,firewall=1
nodename	SRVDEPLOY-S4P2
numa	0
ostype	l26
pool	SIO1
sata0	local-lvm:20,ssd=on
scsihw	virtio-scsi-single
sockets	1
vmid	1003

☐ Start after created


Advanced ☒ Back Finish

Installation Unbutu server


Choisir la langue ici Français

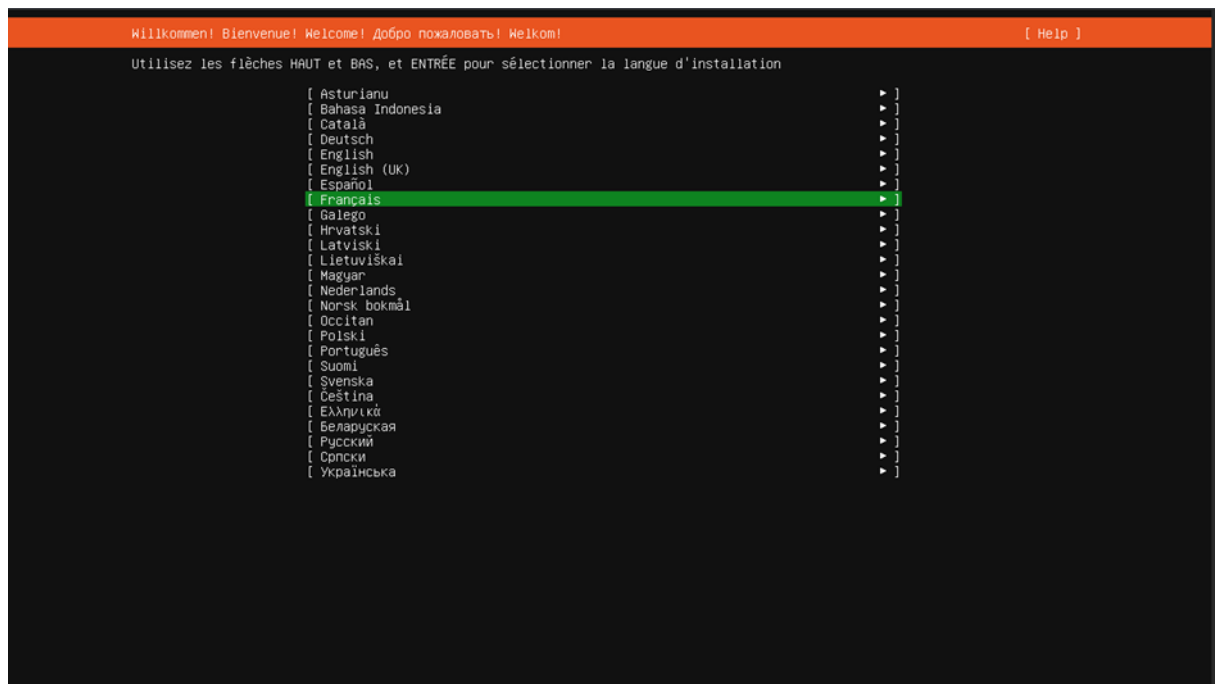


Sélectionner « Mise à jour vers le nouveau programme d'installation »

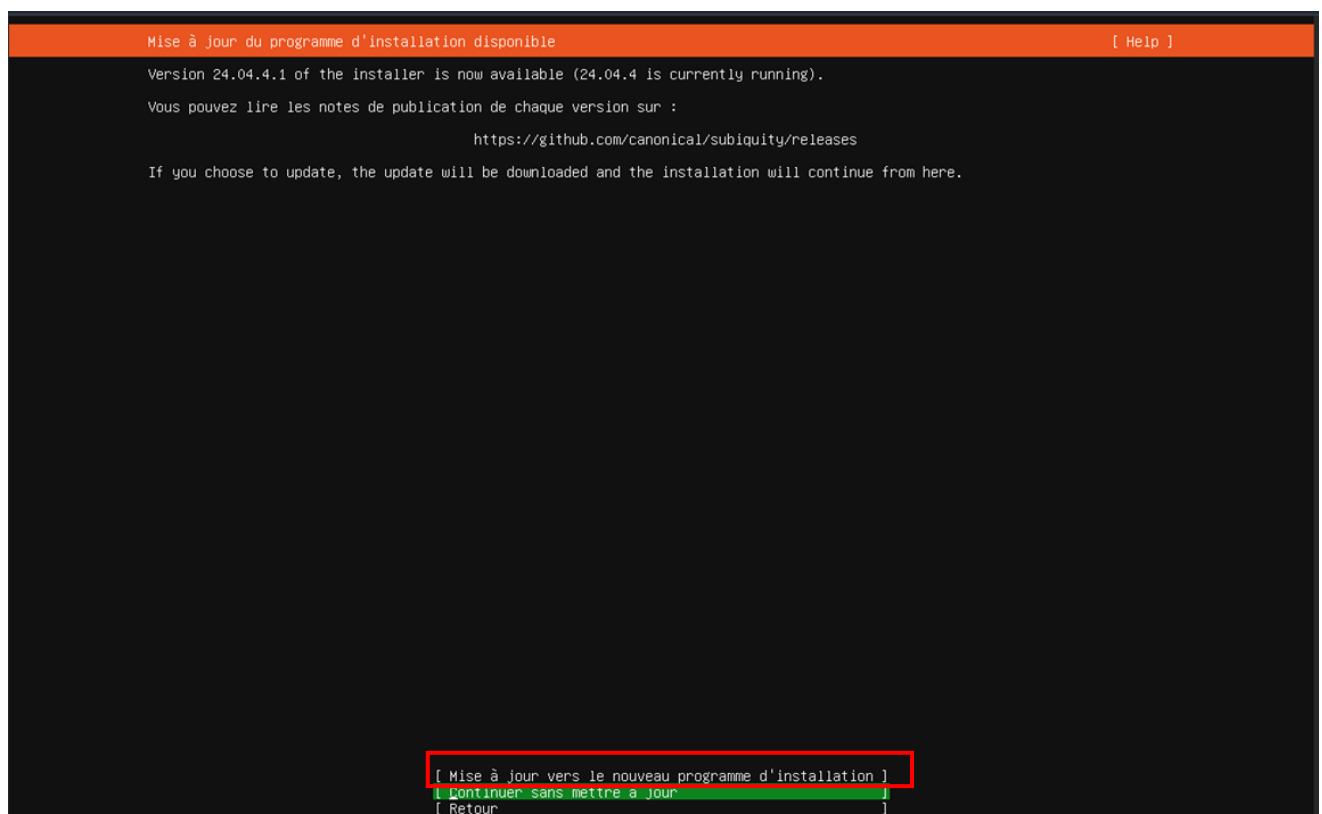


Par défaut c'est Français donc on doit cliquer sur Done

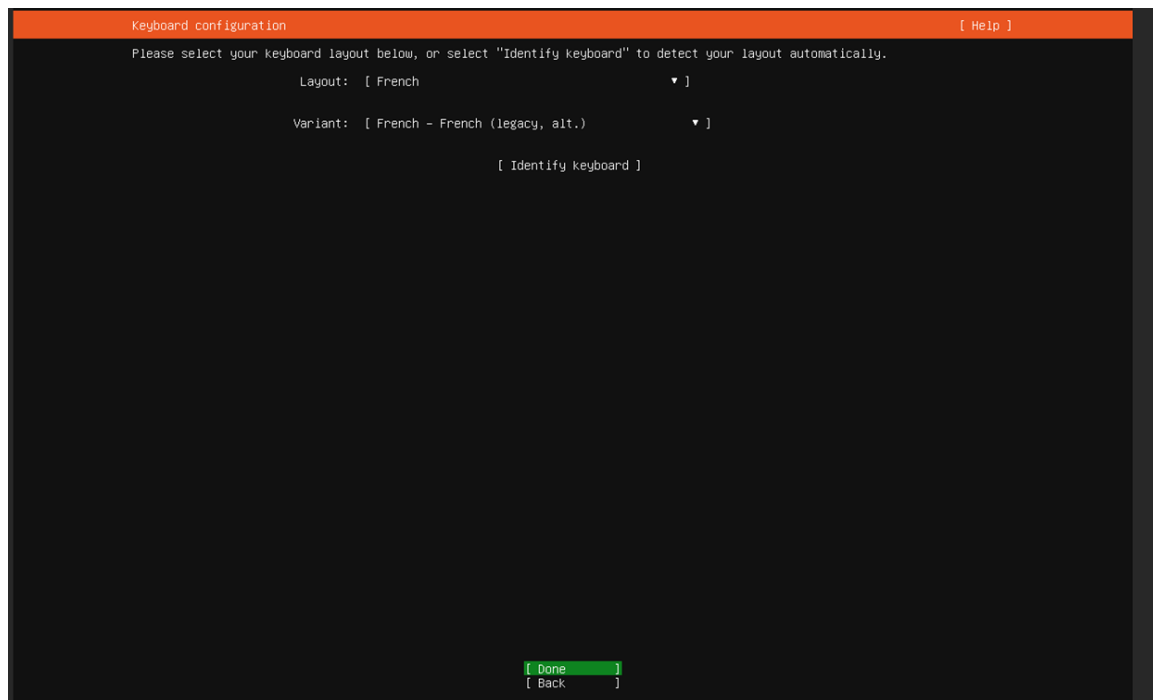


« Unbutu Server » est sélectionner par défaut clic « done »

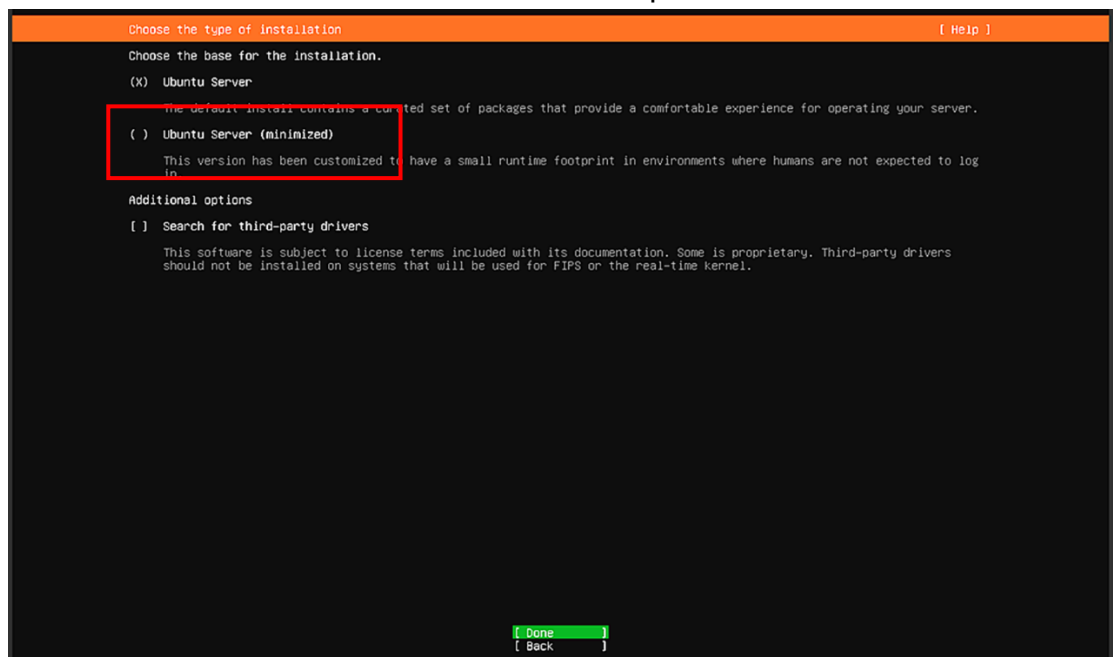

Clic sur « ens18 »

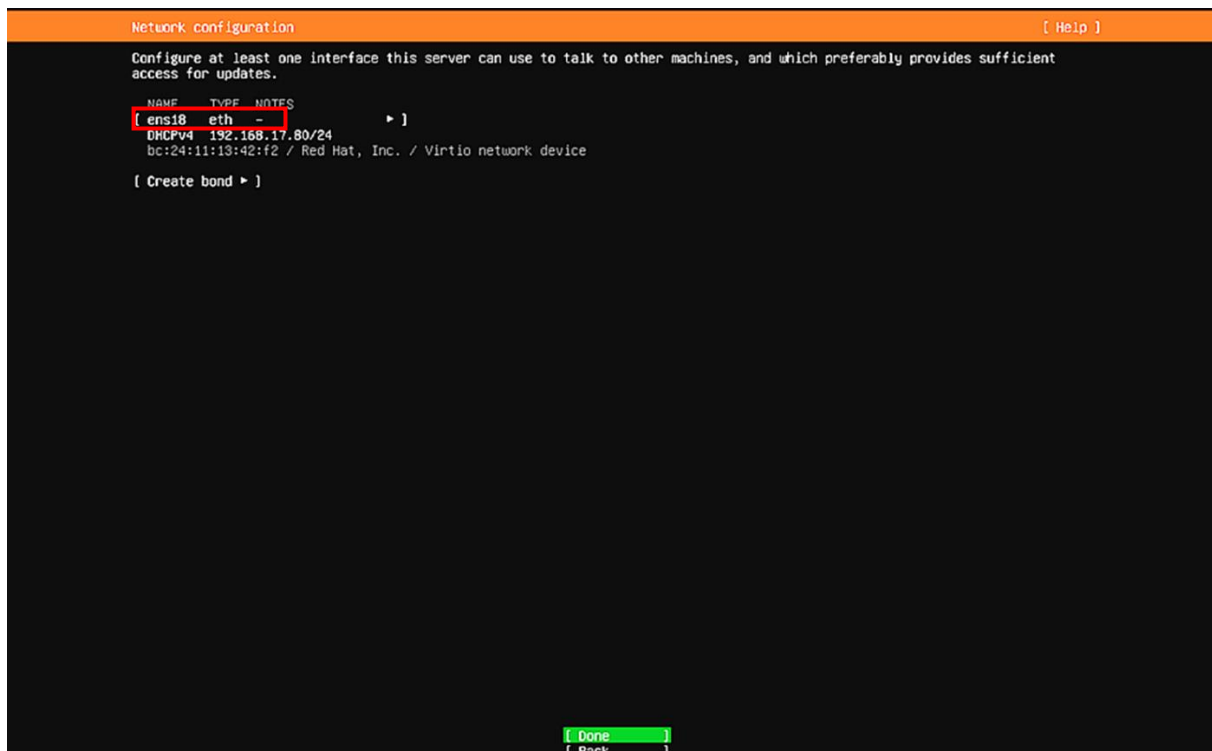

On clique sur ipv4

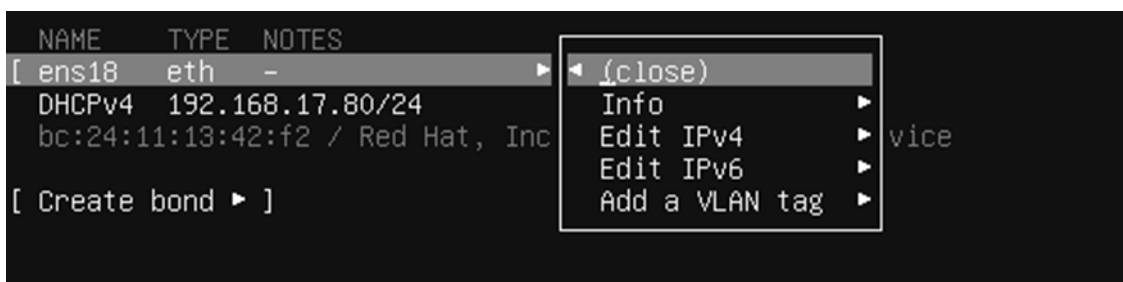

Puis on Sélectionne Manual



Mettre la config qui correspond à son infrastructure

— Edit ens18 IPv4 configuration —

IPv4 Method: [Manuel ▼]

Masque de sous-réseau: 192.168.17.0/24

Adresse : 192.168.17.3

Passerelle : 192.168.17.254

Serveurs DNS : 192.168.17.1,8.8.8.8
IP addresses, comma separated

Domaines de recherche :
Domains, comma separated

[Sauvegarder]
[Annuler]

Skip cette étape

Proxy configuration [Help]



If this system requires a proxy to connect to the internet, enter its details here.

Proxy address:

If you need to use a HTTP proxy to access the outside world, enter the proxy information here. Otherwise, leave this blank.

The proxy information should be given in the standard form of "http://[[user][:pass]@]host[:port]/".

Attendre qui s'affiche « Lecture des Paquets » vérifier s'il n'y a pas d'erreur puis clic sur Done

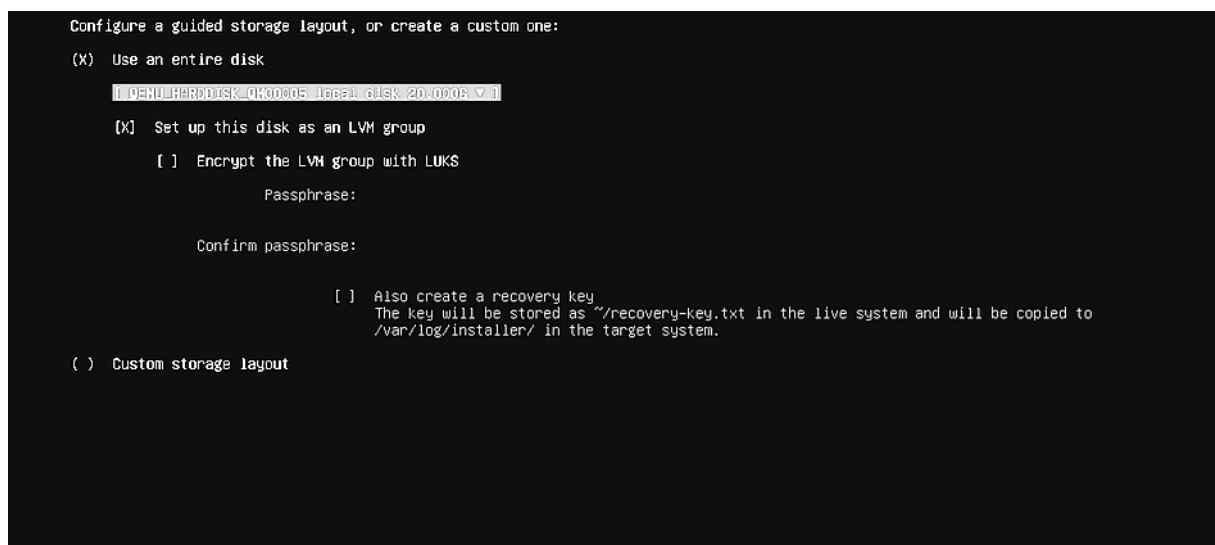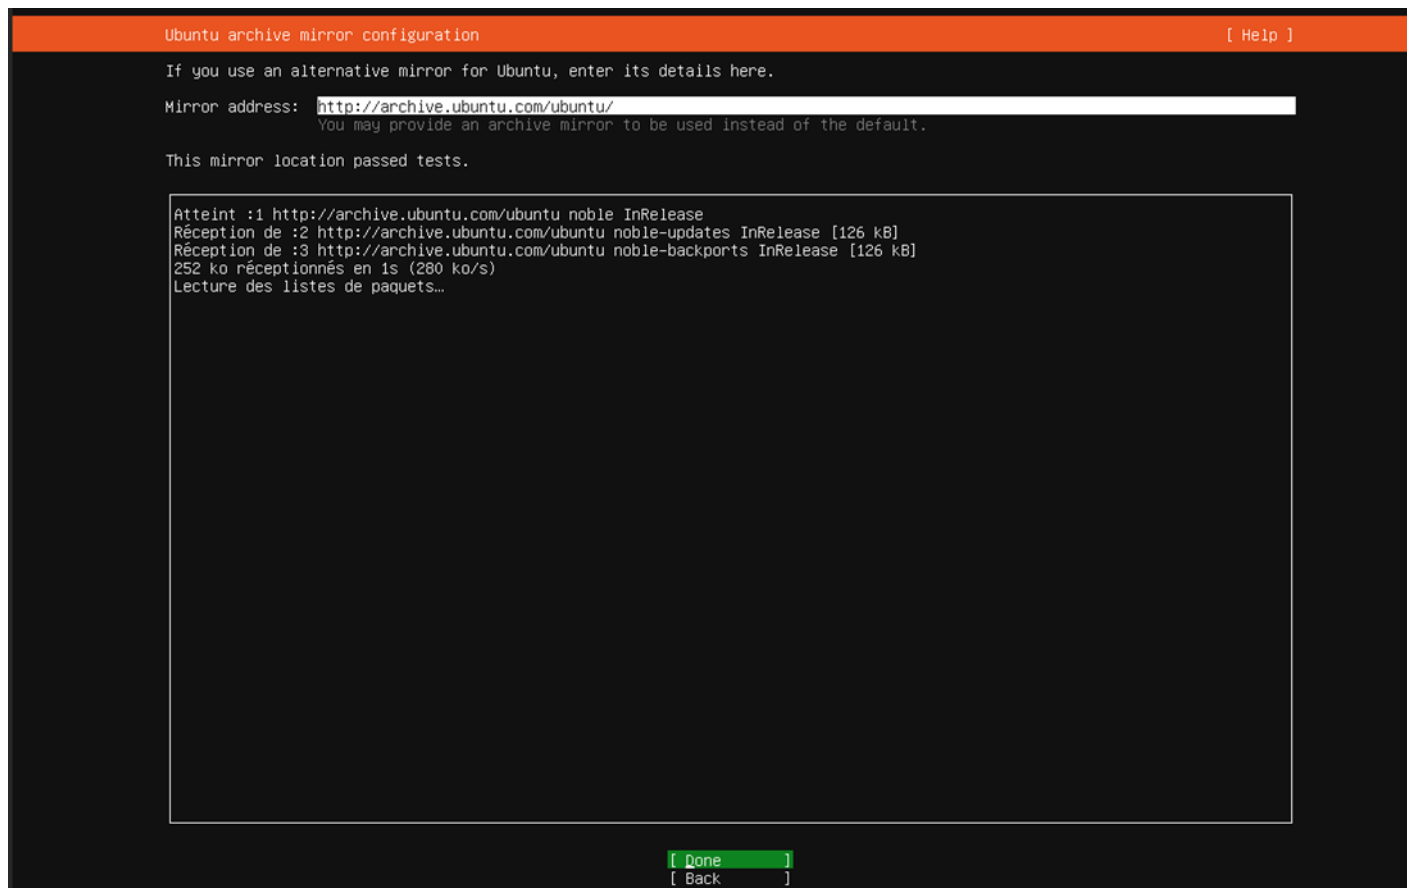

```
FILE SYSTEM SUMMARY

MOUNT POINT      SIZE      TYPE      DEVICE TYPE
[ /               10.000G   new ext4   new LVM logical volume ▶ ]
[ /boot          1.771G   new ext4   new partition of local disk ▶ ]

AVAILABLE DEVICES

DEVICE              TYPE              SIZE
[ ubuntu-vg (new)    LVM volume group  18.222G ▶ ]
  free space                8.222G ▶ ]

[ Create software RAID (md) ▶ ]
[ Create volume group (LVM) ▶ ]

USED DEVICES

DEVICE              TYPE              SIZE
[ ubuntu-vg (new)    LVM volume group  18.222G ▶ ]
  ubuntu-lv          new, to be formatted as ext4, mounted at / 10.000G ▶ ]

[ QEMU_HARDDISK_QM00005 local disk        20.000G ▶ ]
  partition 1        new, BIOS grub spacer          1.000M ▶ ]
  partition 2        new, to be formatted as ext4, mounted at /boot 1.771G ▶ ]
  partition 3        new, PV of LVM volume group ubuntu-vg        18.225G ▶ ]

[ Done ]
[ Reset ]
[ Back ]
```

Mettre sa config et son ID et son MDP

Profile configuration [Help]

Enter the username and password you will use to log in to the system. You can configure SSH access on a later screen, but a password is still needed for sudo.

Votre nom :

SI01

Your servers name:

srv-qlpi

The name it uses when it talks to other computers.


Choisir un nom d'utilisateur :

qlpi



Choisir un mot de passe :

Confirmer votre mot de passe:


Laisser sur Skip for now et Done

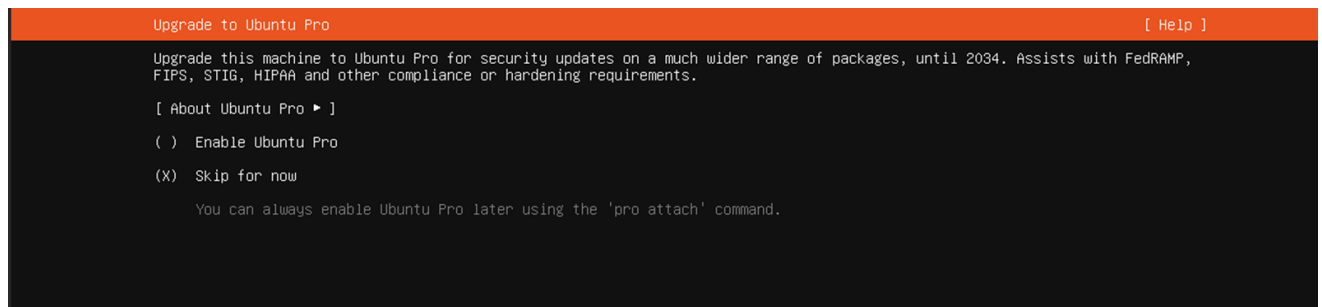

Sélectionner « Install OpenSSH server »

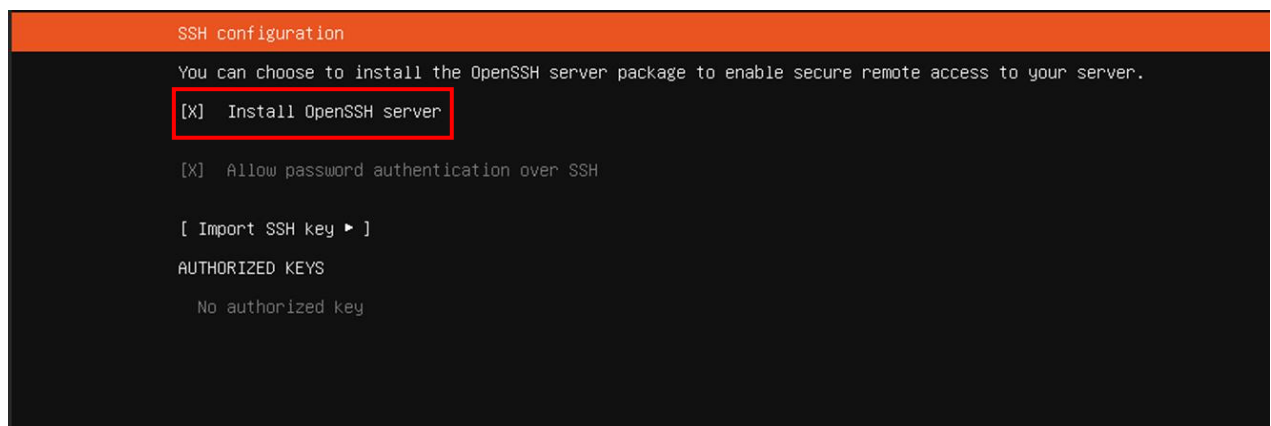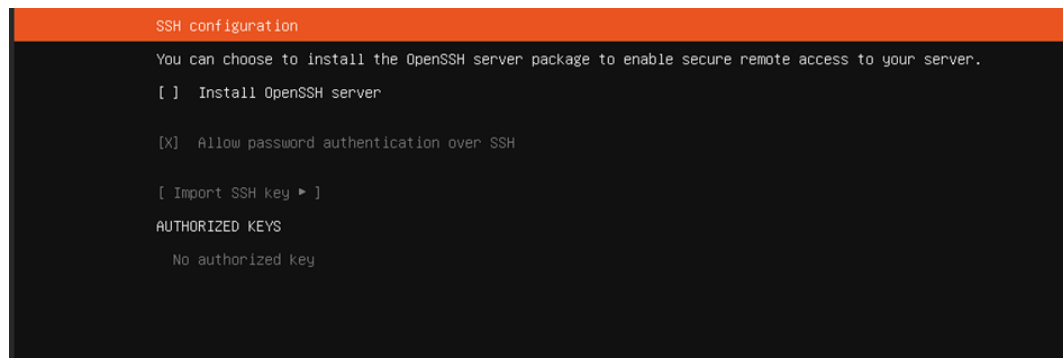

Ne rien sélectionner et Done

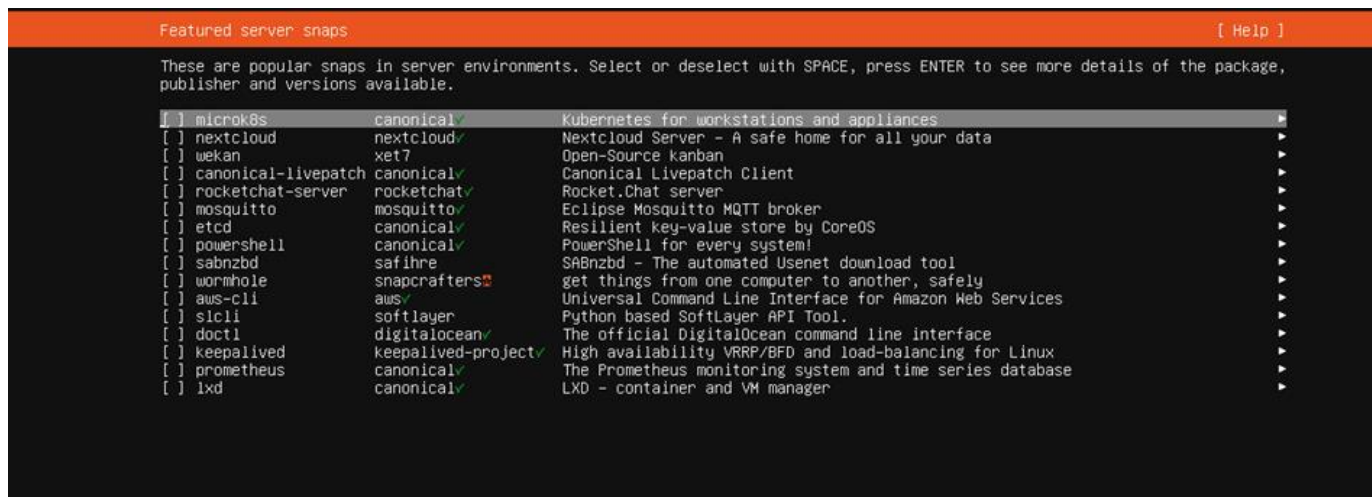

On a lancer l'installation attendre la fin et vérifier s'il y a des erreurs

```

configuring partition: partition-2
configuring lvm_volgroup: lvm_volgroup-0
configuring lvm_partition: lvm_partition-0
configuring format: format-1
configuring mount: mount-1
configuring mount: mount-0
executing curtin install extract step
curtin command install
writing install sources to disk
running 'curtin extract'
curtin command extract
acquiring and extracting image from cp:///tmp/tmpby8rkhd/mount
configuring keyboard
curtin command in-target
executing curtin install curthooks step
curtin command install
configuring installed system
running 'curtin curthooks'
curtin command curthooks
configuring apt
installing missing packages
Installing packages on target system: ['grub-pc']
configuring iscsi service
configuring raid (mdadm) service
configuring NVMe over TCP
installing kernel
setting up swap
apply networking config
writing etc/fstab
configuring multipath
updating packages on target system
configuring pollinate user-agent on target
updating initramfs configuration
configuring target system bootloader
installing grub to target devices
copying metadata from /cdrom
final system configuration
curtin command in-target
calculating extra packages to install
installing openssh-server
retrieving openssh-server \
curtin command system-install /

```

Une fois terminer Faite « reboot Now »

```
running 'curtin extract'
  curtin command extract
    acquiring and extracting image from cp:///tmp/tmpby8rkhd/mount
configuring keyboard
  curtin command in-target
executing curtin install curthooks step
  curtin command install
    configuring installed system
      running 'curtin curthooks'
        curtin command curthooks
          configuring apt configuring apt
          installing missing packages
          Installing packages on target system: ['grub-pc']
          configuring iscsi service
          configuring raid (mdadm) service
          configuring NVMe over TCP
          installing kernel
          setting up swap
          apply networking config
          writing etc/fstab
          configuring multipath
          updating packages on target system
          configuring pollinate user-agent on target
          updating initramfs configuration
          configuring target system bootloader
          installing grub to target devices
          copying metadata from /cdrom
final system configuration
  curtin command in-target
    calculating extra packages to install
    installing openssh-server
    retrieving openssh-server
    curtin command system-install
    unpacking openssh-server
    curtin command system-install
    configuring cloud-init
    downloading and installing security updates
    curtin command in-target
    restoring apt configuration
    curtin command in-target
subiquity/Late/run:
```

[View full log]

[Reboot Now]

Faite entrer

```
[FAILED] Failed unmounting cdrom.mount - /cdrom.
Please remove the installation medium, then press ENTER:
[FAILED] Failed unmounting cdrom.mount - /cdrom.
```

Fini

On passe à l'installation de GLPI

Taper les lignes de commande ci-dessous

1. Mise à jour du système

```
sudo apt update && sudo apt upgrade -y
```

2. Installation des composants

```
sudo apt install -y apache2 mariadb-server php php-  
{cli,common,curl,gd,imap,ldap,mysql,xml,mbstring,intl,zip,bz2,apcu} libapache2-mod-  
php unzip wget
```

3. Activation des services

```
sudo systemctl enable apache2
```

```
sudo systemctl start apache2
```

```
sudo systemctl enable mariadb
```

```
sudo systemctl start mariadb
```

4. Pare-feu

```
sudo ufw allow 80
```

```
sudo ufw allow 443
```

```
sudo ufw enable
```

5. Sécurisation MariaDB

```
sudo mysql_secure_installation
```

6. Base de données

```
sudo mysql -u root -p
```

```
CREATE DATABASE glpidb CHARACTER SET utf8mb4 COLLATE  
utf8mb4_unicode_ci;
```

```
CREATE USER 'glpi'@'localhost' IDENTIFIED BY 'MotDePasseFort123!';  
GRANT ALL PRIVILEGES ON glpidb.* TO 'glpi'@'localhost';  
FLUSH PRIVILEGES;  
EXIT;
```

Dans la commande du dessus modifier « Mot DePasseFort123 » pour mettre le MDP de votre choix

7. Installation GLPI

```
cd /var/www/
```

```
sudo wget https://github.com/glpi-project/glpi/releases/latest/download/glpi.tgz
```

```
sudo tar -xvzf glpi.tgz
```

```
sudo mv glpi html/
```

6. Config Apache

```
sudo nano /etc/apache2/sites-available/glpi.conf
```

```
<VirtualHost *:80>
```

```
ServerName glpi.local
```

DocumentRoot /var/www/html/glpi/public

<Directory /var/www/html/glpi/public>

Require all granted

AllowOverride All

</Directory>

</VirtualHost>

8. Permissions

```
sudo chown -R www-data:www-data /var/www/html/glpi
```

```
sudo chmod -R 755 /var/www/html/glpi
```

9. Configuration Apache

```
sudo nano /etc/apache2/sites-available/glpi.conf
```

<VirtualHost *:80>

ServerName glpi.local

DocumentRoot /var/www/html/glpi/public

<Directory /var/www/html/glpi/public>

Require all granted

AllowOverride All

</Directory>

</VirtualHost>

10. Activation site

```
sudo a2dissite 000-default.conf
```



```
sudo a2ensite glpi.conf  
sudo a2enmod rewrite  
sudo systemctl restart apache2
```

11. Accès


http://IP_DU_SERVEUR/glpi donc ici sa seras <http://192.168.17.3/glpi>

Utilisation GLPI

Se connecter avec l'adresse : 192.168.17.3 /glpi

Il faut sélectionner la langue, acceptez la licence et vérifiez les prérequis et configurer les bases de données.


Mettre son ID ET MDP

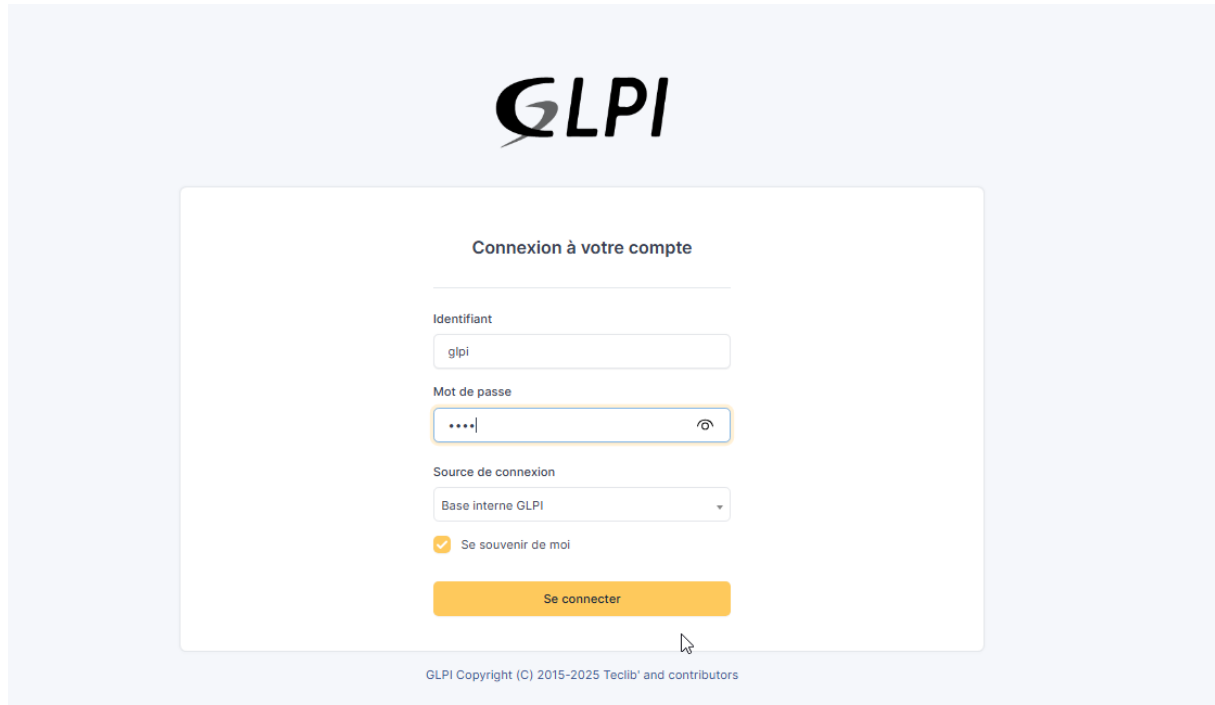

The screenshot shows the GLPI login interface. At the top is the GLPI logo. Below it is a white box titled "Connexion à votre compte". Inside this box, there are three input fields: "Identifiant" with the value "glpi", "Mot de passe" with masked characters "...." and an eye icon, and "Source de connexion" with a dropdown menu showing "Base interne GLPI". Below these fields is a checked checkbox labeled "Se souvenir de moi". At the bottom of the box is an orange button labeled "Se connecter". Below the box, there is a small mouse cursor icon and a footer line that reads "GLPI Copyright (C) 2015-2025 Teclib' and contributors".

On va lier le LDAP a AD1

Configuration>Authentification>Annuaire LDAP

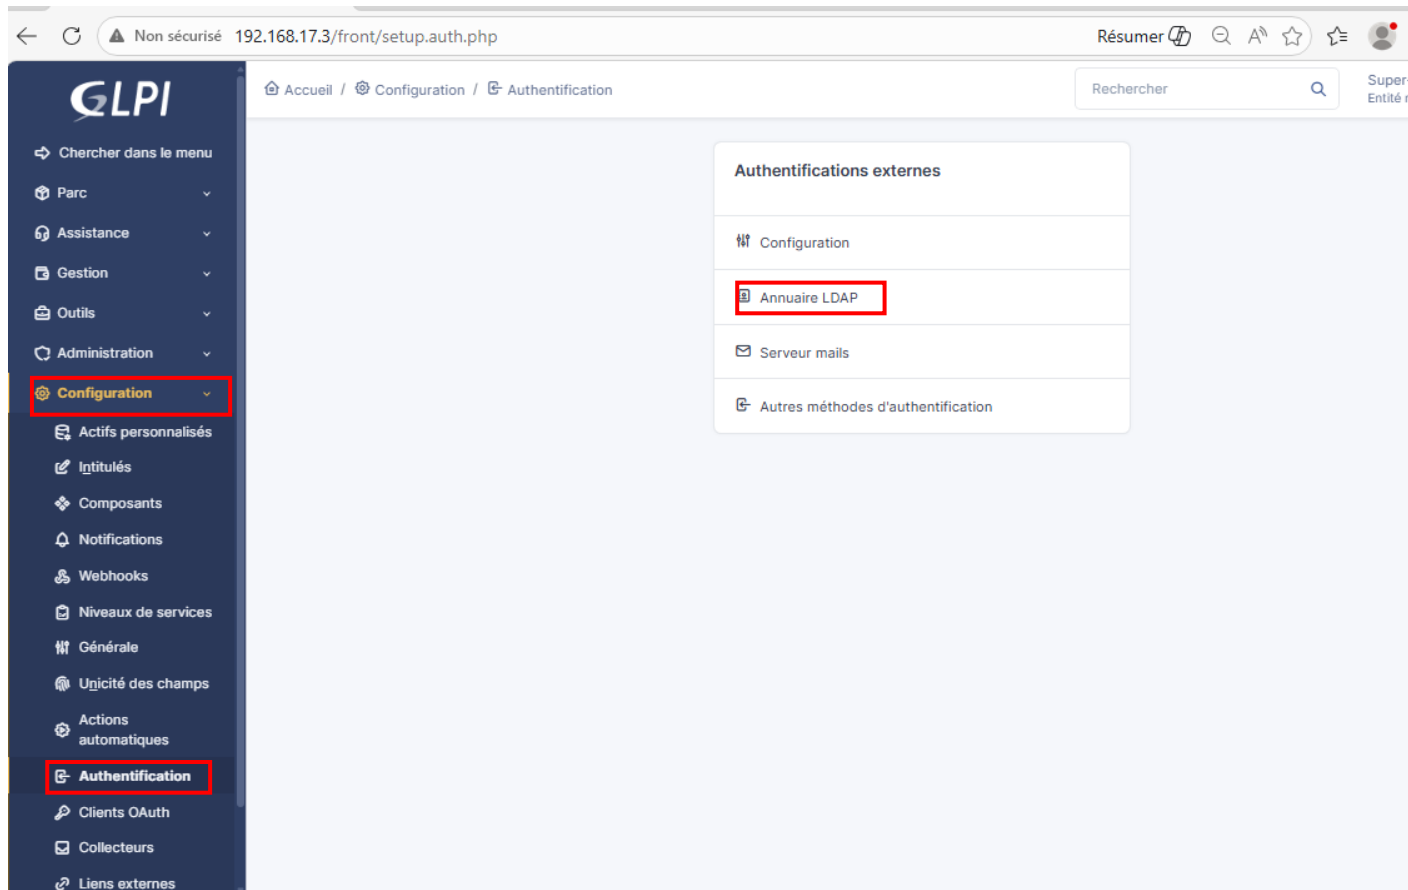

Remplissez les informations de connexion LDAP, y compris le serveur, le BaseDN, DN du compte, Champ de l'identifiant, champ de synchronisation. : • Nom : SRV-AD1

•

Serveur par défaut : Oui •

Actif : Oui

• Serveur : ldap://192.168.17.1

• Port : par default (389)

• Filtre de connexion :

((&(objectClass=user)(objectCategory=person)(!(userAccountControl:1.2.840.113556.1.4.803:=2))))

BaseDN : DC=carnoux,DC=local

Utiliser bind : Oui

DN du compte : Administrateur@carnoux.local

Mot de passe du compte : Mot de passe du compte

Champ de l'identifiant : samaccountname

Champ de synchronisation : objectguid

GLPI

192.168.17.3/front/authldap.form.php?id=2

Accueil / Configuration / Authentification / Annuaire LDAP

Annuaire LDAP - SRV-AD1EXE - ID 2

Tester

Utilisateurs

Groupes

Informations avancées

Réplicats

Historique

Tous

Nom: SRV-AD1EXE

Activé: Oui

Serveur par défaut: Non

Serveur: ldap://192.168.17.1

Port (par défaut 389): 389

Commentaires:

Filtre de connexion: (&(objectClass=user)(objectCategory=person)((userAccountControl:1.2.840.113556.1.4.803:=2)))

BaseDN: DC=carnoux,DC=local

Utiliser bind: Oui

DN du compte (pour les connexions non anonymes): CN=Administrateur,CN=Users,DC=carnoux,DC=local

Mot de passe du compte (pour les connexions non anonymes):

Champ de l'identifiant: samaccountname

Champ de synchronisation: objectguid

Il faut tester si tout vert c'est bon

Annuaire LDAP - SRV-AD1EXE - ID 2

Actions 1/1

Annuaire LDAP

Tester

Utilisateurs

Groupes

Informations avancées

Réplicats

Historique

Tous

Test LDAP Serveur : SRV-AD1EXE

- 1 Flux TCP
Connexion à 192.168.17.1 sur le port 636 réussie
- 2 Base DN
Base DN "DC=carnoux,DC=local" configurée
- 3 LDAP URI
Vérification de l'URI LDAP réussie
- 4 Connexion Bind
Authentification réussie
- 5 Chercher (50 premiers résultats)
Recherche réussie (15 entrées trouvées)

Se déconnecter du compte super admin

Puis changer la source de connexion en « srv-AD1 »



Connexion à votre compte

Identifiant

Mot de passe

Source de connexion

Se connecter

GLPI Copyright (C) 2015-2025 Teclib' and contributors

Puis se connecter avec un User qu'on a créé sur l'AD
ici note User est « Flavinho »

Connexion à votre compte

Identifiant

Mot de passe

Source de connexion

☒ Se souvenir de moi

Se connecter

Puis tester d'envoyer un ticket

Fin

