Intune Documentation

Intune Configuration Export

Microsoft Intune

Configuration Documentation


Comprehensive export of Intune policies, profiles, and assignments

TENANT

ffc10f05...

Data collected **21 Oct 2026 · 18:20**

Generated **21 Oct 2026 · 19:30**



Assigned configurations

Share of the configurations that take assignments

AT A GLANCE

CONFIGURATIONS COLLECTED

841

28 policy types

ASSIGNED

147

With at least one assignment

NOT ASSIGNED

654

No assignment found

ASSIGNMENT UNKNOWN

0

Assignments could not be read

Unknown assignments are not counted as assigned.

Collection: no collection warnings recorded.

DOCUMENT CONTROL

Tenant	Version
ffc10f05...	v2026.10.21

TENANT OVERVIEW

Executive Summary

Counts read from the collected configuration. Unknown assignments are not counted as assigned.

Configurations by family

841 configurations in 28 policy types

Settings Catalog Policies	17 assigned, 122 not assigned, 0 unknown	139
Device Configurations	9 assigned, 15 not assigned, 0 unknown	24
Administrative Templates	0 assigned, 2 not assigned, 0 unknown	2
Compliance Policies	2 assigned, 18 not assigned, 0 unknown	20
App Protection Policies	1 assigned, 0 not assigned, 0 unknown	1
Security Baselines	1 assigned, 0 not assigned, 0 unknown	1
Scripts	13 assigned, 0 not assigned, 0 unknown	13
App Configuration Policies	0 assigned, 1 not assigned, 0 unknown	1
Windows Update Policies	2 assigned, 3 not assigned, 0 unknown	5
Conditional Access Policies	Assignment not applicable	1
Enrollment Configurations	5 assigned, 1 not assigned, 0 unknown	6
Windows update profiles	2 assigned, 0 not assigned, 0 unknown	2
Scripts & remediation	20 assigned, 9 not assigned, 0 unknown	29
Enrollment & provisioning	1 assigned, 0 not assigned, 0 unknown, 1 not applicable	2
Applications	67 assigned, 476 not assigned, 0 unknown	543
Assignment & RBAC	7 assigned, 7 not assigned, 0 unknown, 32 not applicable	46
Tenant & service	Assignment not applicable	2
Connectors	Assignment not applicable	4

Assignment not applicable: 40 configurations; excluded from the assigned share.

Not modified in 90 days or more: 686 configurations.


Collection: no collection warnings recorded.

Configuration Inventory

POLICY TYPE	TOTAL	ASSIGNED	NOT ASSIGNED	UNKNOWN
Settings Catalog	**139**	17	122	0
Device configurations (templates)	**24**	9	15	0
Administrative Templates	**2**	0	2	0
Security baselines & Endpoint Security	**1**	1	0	0
Compliance policies	**20**	2	18	0
App protection policies	**1**	1	0	0
Windows PowerShell scripts	**1**	1	0	0
macOS shell scripts	**12**	12	0	0
App configuration policies	**1**	0	1	0
Windows update rings	**5**	2	3	0
Enrollment configurations	**6**	5	1	0
Conditional Access policies	**1**	n/a	n/a	n/a
Feature update profiles	**2**	2	0	0
Remediations	**10**	5	5	0
macOS custom attributes	**19**	15	4	0
Windows Autopilot deployment profiles	**1**	1	0	0
Apple ADE tokens	**1**	n/a	n/a	n/a
Mobile apps	**543**	67	476	0
Assignment filters	**3**	n/a	n/a	n/a
Reusable policy settings	**8**	n/a	n/a	n/a
Scope tags	**14**	7	7	0
Role definitions	**17**	n/a	n/a	n/a
Role assignments	**4**	n/a	n/a	n/a
Intune tenant settings	**1**	n/a	n/a	n/a
Android Enterprise settings	**1**	n/a	n/a	n/a
Mobile threat-defense connectors	**1**	n/a	n/a	n/a
Device-management partners	**1**	n/a	n/a	n/a
Remote-assistance partners	**2**	n/a	n/a	n/a

Platform Coverage

Configurations per platform

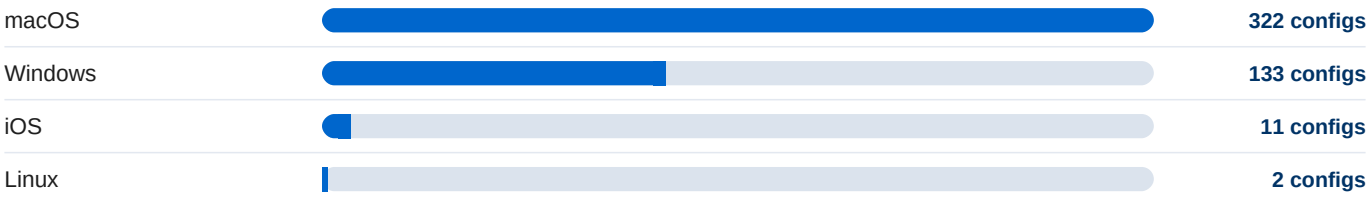

Top Assigned Groups

RANK	GROUP	ASSIGNMENTS
1	All Devices	74
2	All Users	53
3	All_MacOS_Devices	11
4	All_Windows_Devices	8
5	All Devices in Germany	6

_MSLearn_Example_macOS Remote Help - Privacy Preferences Policy Control (continued)

SETTING	VALUE	DESCRIPTION
Accessibility (deprecated)	5 setting(s) configured	Specifies the policies for the app via the Accessibility subsystem. This profile deprecated its ability to grant access as of macOS 26.2, and removes that ability in macOS 27.0. Deprecated: use the `Privacy` key in the declarative management `com.apple.configuration.app-settings` configuration.
Authorization	Allow	The Authorization key is an optional replacement for the Allowed key. Every payload must specify either Authorization or Allowed, but not both.
Code Requirement	identifier "com.microsoft.remotehelp" and anchor apple generic and certificate 1[field.1.2.840.113635.100.6.2.6] /* exists */ and certificate leaf[field.1.2.840.113635.100.6.1.13] /* exists */ and certificate leaf[subject.OU] = UBF8T346G9	Obtained via the command "codesign –display -r -".
Identifier	com.microsoft.remotehelp	The bundle ID or installation path of the binary. > Note: > This value is case-sensitive.
Identifier Type	bundle ID	The type of identifier value. Application bundles must be identified by bundle ID. Nonbundled binaries must be identified by installation path. Helper tools embedded within an application bundle automatically inherit the permissions of their enclosing app bundle.
Static Code	False	If true, statically validate the code requirement. Used only if the process invalidates its dynamic code signature.
Screen Capture	5 setting(s) configured	Allows the application to capture (read) the contents of the system display. A profile can't grant access to the contents; it can only deny it.
Authorization	Allow Standard User To Set System Service	The Authorization key is an optional replacement for the Allowed key. Every payload must specify either Authorization or Allowed, but not both.
Code Requirement	identifier "com.microsoft.remotehelp" and anchor apple generic and certificate 1[field.1.2.840.113635.100.6.2.6] /* exists */ and certificate leaf[field.1.2.840.113635.100.6.1.13] /* exists */ and certificate leaf[subject.OU] = UBF8T346G9	Obtained via the command "codesign –display -r -".
Identifier	com.microsoft.remotehelp	The bundle ID or installation path of the binary. > Note: > This value is case-sensitive.
Identifier Type	bundle ID	The type of identifier value. Application bundles must be identified by bundle ID. Nonbundled binaries must be identified by installation path. Helper tools embedded within an application bundle automatically inherit the permissions of their enclosing app bundle.
Static Code	False	If true, statically validate the code requirement. Used only if the process invalidates its dynamic code signature.

Antivirus MDE Exc

Created: 17 May 2025 · 19:11 Last Modified: 17 May 2025 · 19:20
Assigned to: All Users

SETTING	VALUE	DESCRIPTION
Excluded Extensions	.txt	Allows an administrator to specify a list of file type extensions to ignore during a scan. Each file type in the list must be separated by a |. For example, lib|obj.

assa

Created: 28 Feb 2024 · 16:11 Last Modified: 28 Feb 2024 · 16:12
Assigned to: Group: All_MacOS_User

SETTING	VALUE	DESCRIPTION
Enforcement level	audit	Specifies if network protection is disabled, in audit mode, or enforced
Enforcement level	audit	Specifies if tamper protection is disabled, in audit mode, or enforced

assa

Created: 2 Sep 2024 · 15:14 Last Modified: 2 Sep 2024 · 15:14
Assigned to: Not assigned

SETTING	VALUE	DESCRIPTION
Top Level Setting Group Collection	27 setting(s) configured	Synthetic Top Level Setting Group Collection
Authentication Method (Deprecated)	UserSecureEnclaveKey	The Platform SSO authentication method the extension uses. Requires that the SSO Extension also supports the method. Available in macOS 13 and later.
Extension Data	9 setting(s) configured	A dictionary of arbitrary data passed through to the app extension.
Key	AppPrefixAllowList	Additional extension-specific data to pass to the app extension.
Type	String	Keys and values to pass to the app extension.
Value	com.microsoft.,com.apple.	Keys and values to pass to the app extension.
Key	browser_sso_interaction_enabled	Additional extension-specific data to pass to the app extension.
Type	Integer	Keys and values to pass to the app extension.
Value	1	Keys and values to pass to the app extension.
Key	disable_explicit_app_prompt	Additional extension-specific data to pass to the app extension.
Type	Integer	Keys and values to pass to the app extension.
Value	1	Keys and values to pass to the app extension.
Extension Identifier	com.microsoft.CompanyPortalMac.ssoextension	The bundle identifier of the app extension that performs SSO for the specified URLs.

assa (continued)

SETTING	VALUE	DESCRIPTION
Platform SSO	9 setting(s) configured	This is the dictionary used to configure PlatformSSO.
Authentication Method	UserSecureEnclaveKey	The Platform SSO authentication method to be used with the extension. Requires that the SSO Extension also support the method.
Enable Authorization	Enabled	Enables using identity provider accounts at authorization prompts. Requires 'UseSharedDeviceKeys' is true. The account will be assigned groups using the 'AdministratorGroups', 'AdditionalGroups', or 'AuthorizationGroups'.
Enable Create User At Login	Enabled	Enables creating new users at the login window with either Passwords or SmartCards. Requires 'UseSharedDeviceKeys' is true.
New User Authorization Mode	Standard	This setting affects the permissions for accounts created at login by Platform SSO. It is only used when the account is created. Use of the following: * Standard The account will be a standard user. * Admin The account will be added to the local administrators group. * Groups The account will be assigned groups using the 'AdministratorGroups', 'AdditionalGroups', or 'AuthorizationGroups'.
Token To User Mapping	2 setting(s) configured	The attribute mapping used when creating new users or for authorization.
Account Name	preferred_username	The claim name to use for the user's account name.
Full Name	name	The claim name to use for the user's full name.
Use Shared Device Keys	Enabled	If set to true, Platform SSO will use the same signing and encryption keys for all users.
User Authorization Mode	Standard	This setting affects the permissions after authentication by Platform SSO. It is applied each time user authenticates. Use of the following: * Standard The account will be a standard user. It will be removed from the 'admin' group. * Admin The account will be added to the local administrators group. * Groups The account will be assigned groups using the 'AdministratorGroups', 'AdditionalGroups', or 'AuthorizationGroups'.
Registration Token	[Redacted]	The token this device uses for registration with Platform SSO. Use it for silent registration with the Identity Provider. Requires that 'AuthenticationMethod' isn't empty. Available in macOS 13 and later.
Screen Locked Behavior	Do Not Handle	When set to Do Not Handle, the request continues without SSO. Available in iOS 15 and later and macOS 12 and later.

assa (continued)

SETTING	VALUE	DESCRIPTION
Team Identifier	UBF8T346G9	The team identifier of the app extension. The device requires this key on macOS and ignores it elsewhere.
Type	Redirect	The type of SSO.
URLs	https://login.microsoftonline.com, https://login.microsoft.com, https://sts.windows.net	An array of URL prefixes of identity providers where the app extension performs SSO. Required for Redirect payloads. Ignored for Credential payloads. The URLs must begin with http:// or https://, the scheme and host name are matched case-insensitively, query parameters and URL fragments are not allowed, and the URLs of all installed Extensible SSO payloads must be unique.

Bitlocker_Policy Test1122123

Created: 4 Nov 2023 · 09:31 Last Modified: 19 May 2025 · 15:07
Assigned to: All Users

sda

SETTING	VALUE	DESCRIPTION
Enforce drive encryption type on fixed data drives	Enabled	This policy setting allows you to configure the encryption type used by BitLocker Drive Encryption. This policy setting is applied when you turn on BitLocker. Changing the encryption type has no effect if the drive is already encrypted or if encryption is in progress. Choose full encryption to require that the entire drive be encrypted when BitLocker is turned on. Choose used space only encryption to require that only the portion of the drive used to store data is encrypted when BitLocker is turned on. If you enable this policy setting the encryption type that BitLocker will use to encrypt drives is defined by this policy and the encryption type option will not be presented in the BitLocker setup wizard. If you disable or do not configure this policy setting, the BitLocker setup wizard will ask the user to select the encryption type before turning on BitLocker.
Select the encryption type:	Used Space Only encryption	
Choose how BitLocker-protected fixed drives can be recovered	Enabled	This policy setting allows you to control how BitLocker-protected fixed data drives are recovered in the absence of the required credentials. This policy setting is applied when you turn on BitLocker. The "Allow data recovery agent" check box is used to specify whether a data recovery agent can be used with BitLocker-protected fixed data drives. Before a data recovery agent can be used it must be added from the Public Key Policies

Bitlocker_Policy Test1122123 (continued)

SETTING	VALUE	DESCRIPTION
		item in either the Group Policy Management Console or the Local Group Policy Editor. Consult the BitLocker Drive Encryption Deployment Guide on Microsoft TechNet for more information about adding data recovery agents. In "Configure user storage of BitLocker recovery information" select whether users are allowed, required, or not allowed to generate a 48-digit recovery password or a 256-bit recovery key. Select "Omit recovery options from the BitLocker setup wizard" to prevent users from specifying recovery options when they turn on BitLocker on a drive. This means that you will not be able to specify which recovery option to use when you turn on BitLocker, instead BitLocker recovery options for the drive are determined by the policy setting. In "Save BitLocker recovery information to Active Directory Domain Services" choose which BitLocker recovery information to store in AD DS for fixed data drives. If you select "Backup recovery password and key package", both the BitLocker recovery password and key package are stored in AD DS. Storing the key package supports recovering data from a drive that has been physically corrupted. If you select "Backup recovery password only," only the recovery password is stored in AD DS. Select the "Do not enable BitLocker until recovery information is stored in AD DS for fixed data drives" check box if you want to prevent users from enabling BitLocker unless the computer is connected to the domain and the backup of BitLocker recovery information to AD DS succeeds. Note: If the "Do not enable BitLocker until recovery information is stored in AD DS for fixed data drives" check box is selected, a recovery password is automatically generated. If you enable this policy setting, you can control the methods available to users to recover data from BitLocker-protected fixed data drives. If this policy setting is not configured or disabled, the default recovery options are supported for BitLocker recovery. By default a DRA is allowed, the recovery options can be specified by the user including the recovery password and recovery key, and recovery information is not backed up to AD DS
Do not enable BitLocker until recovery information is stored to AD DS for fixed data drives	True	
Configure storage of BitLocker recovery information to AD DS:	Backup recovery passwords and key packages	

Bitlocker_Policy Test1122123 (continued)

SETTING	VALUE	DESCRIPTION
FDVRecoveryKeyUsageDropDown_Name	Allow 256-bit recovery key	
Allow data recovery agent	False	
Configure user storage of BitLocker recovery information:	Allow 48-digit recovery password	
Save BitLocker recovery information to AD DS for fixed data drives	True	
Omit recovery options from the BitLocker setup wizard	True	
Deny write access to fixed drives not protected by BitLocker	Enabled	This policy setting determines whether BitLocker protection is required for fixed data drives to be writable on a computer. If you enable this policy setting, all fixed data drives that are not BitLocker-protected will be mounted as read-only. If the drive is protected by BitLocker, it will be mounted with read and write access. If you disable or do not configure this policy setting, all fixed data drives on the computer will be mounted with read and write access.
Enforce drive encryption type on operating system drives	Enabled	This policy setting allows you to configure the encryption type used by BitLocker Drive Encryption. This policy setting is applied when you turn on BitLocker. Changing the encryption type has no effect if the drive is already encrypted or if encryption is in progress. Choose full encryption to require that the entire drive be encrypted when BitLocker is turned on. Choose used space only encryption to require that only the portion of the drive used to store data is encrypted when BitLocker is turned on. If you enable this policy setting the encryption type that BitLocker will use to encrypt drives is defined by this policy and the encryption type option will not be presented in the BitLocker setup wizard. If you disable or do not configure this policy setting, the BitLocker setup wizard will ask the user to select the encryption type before turning on BitLocker.
Select the encryption type:	Used Space Only encryption	