

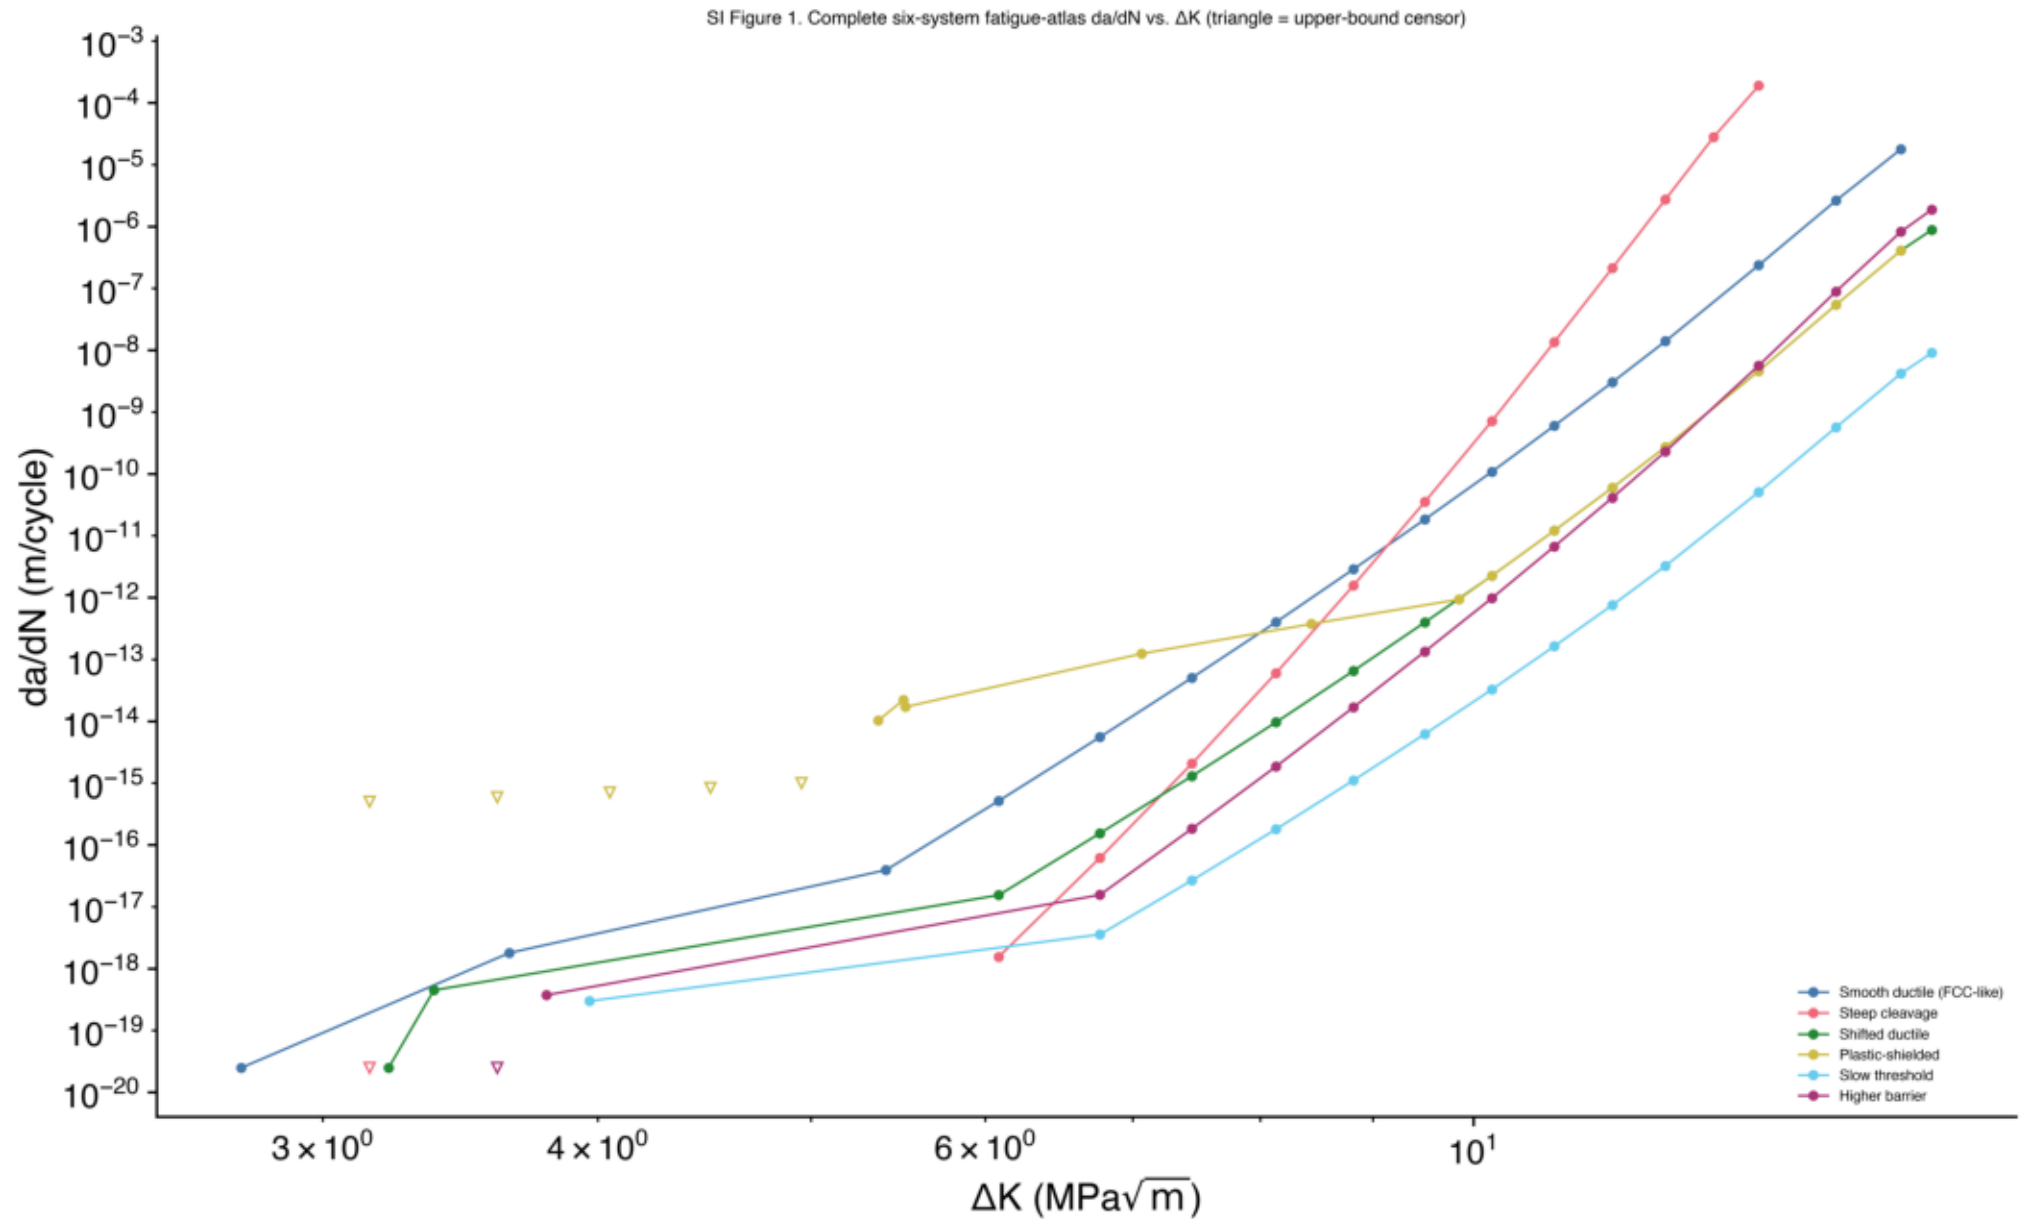
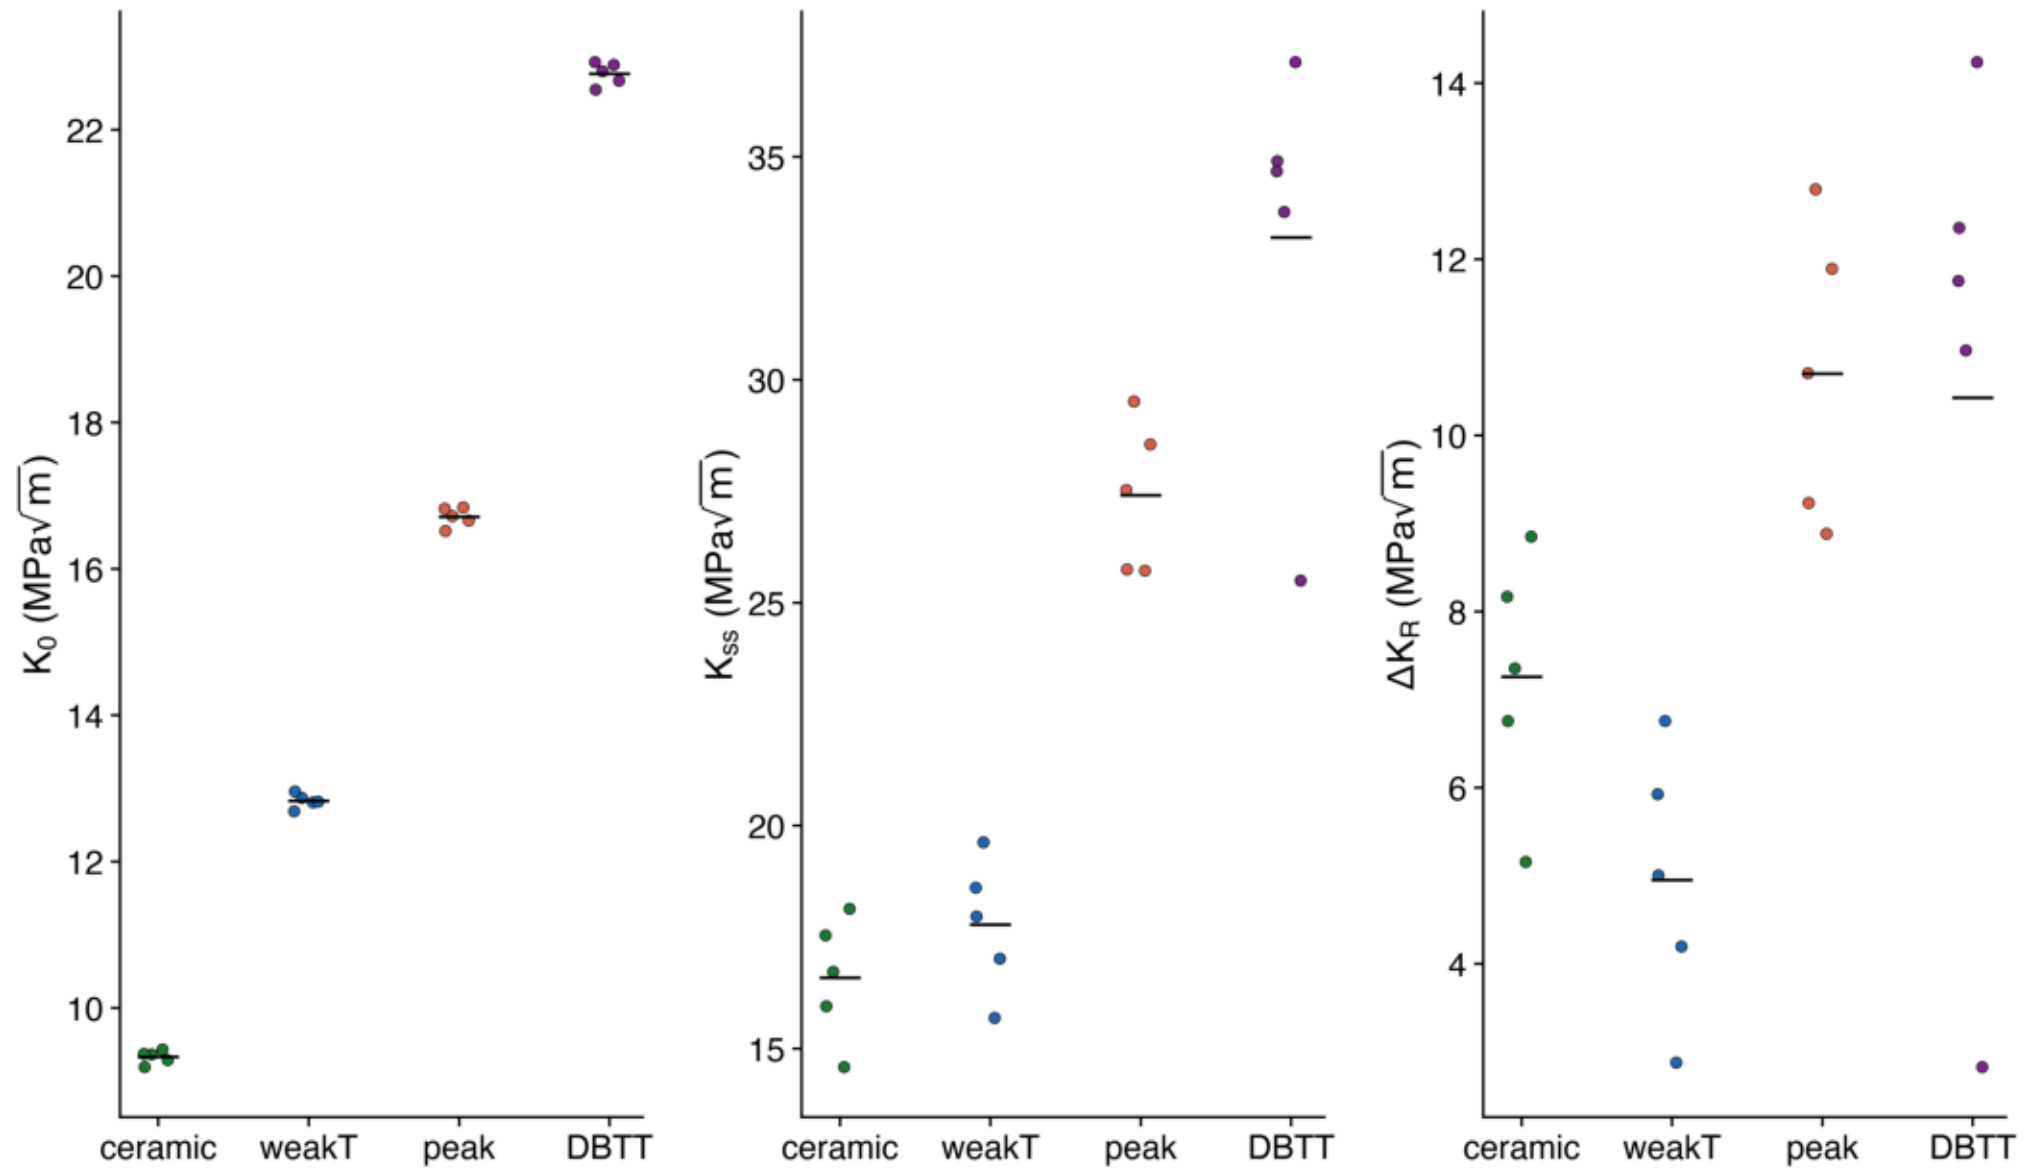


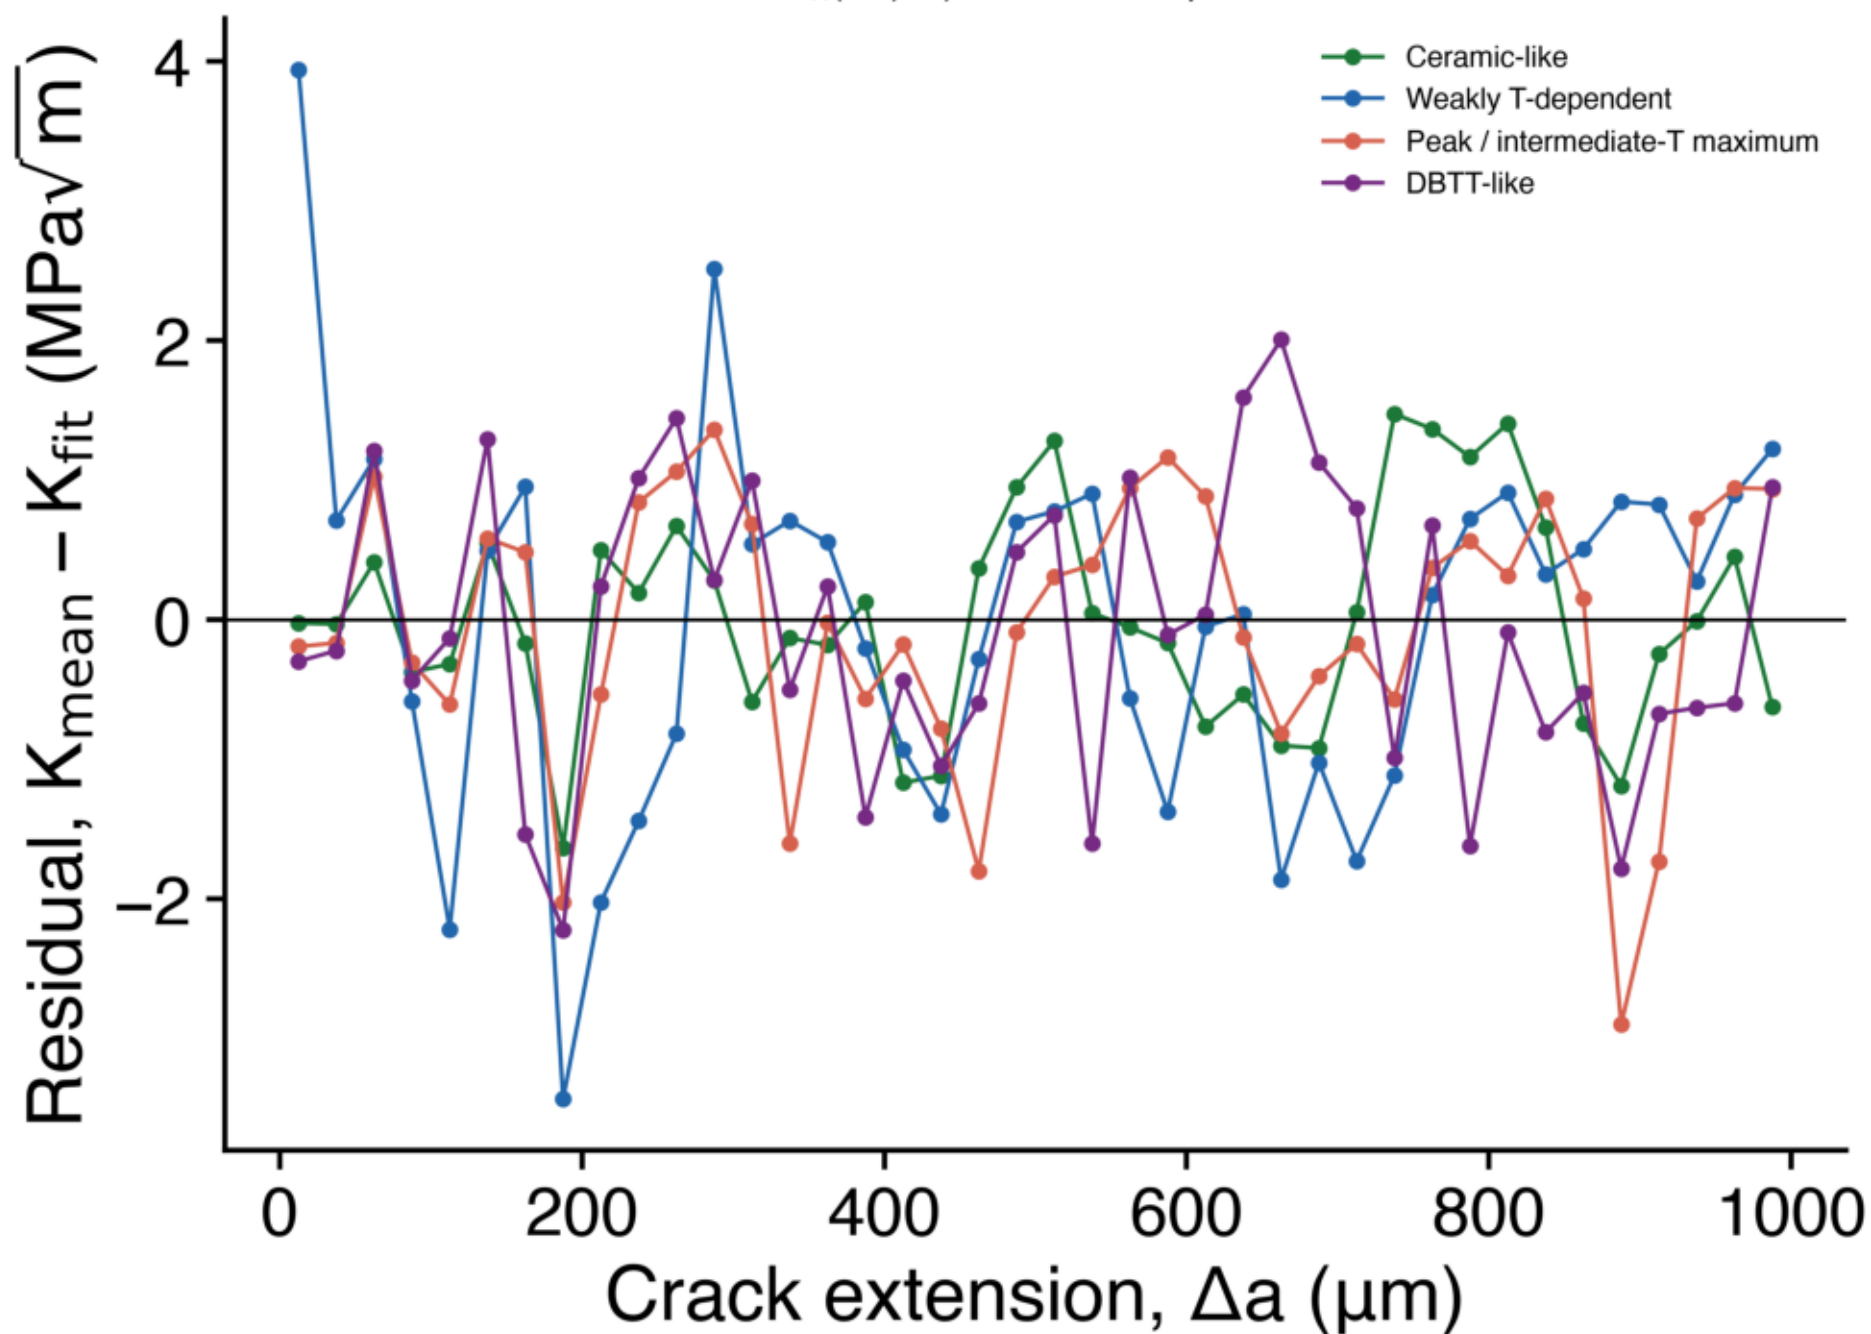


SI Figure 2. All 20 individual seed-level R-curve metrics (5 seeds x 4 classes; black bar = class mean)

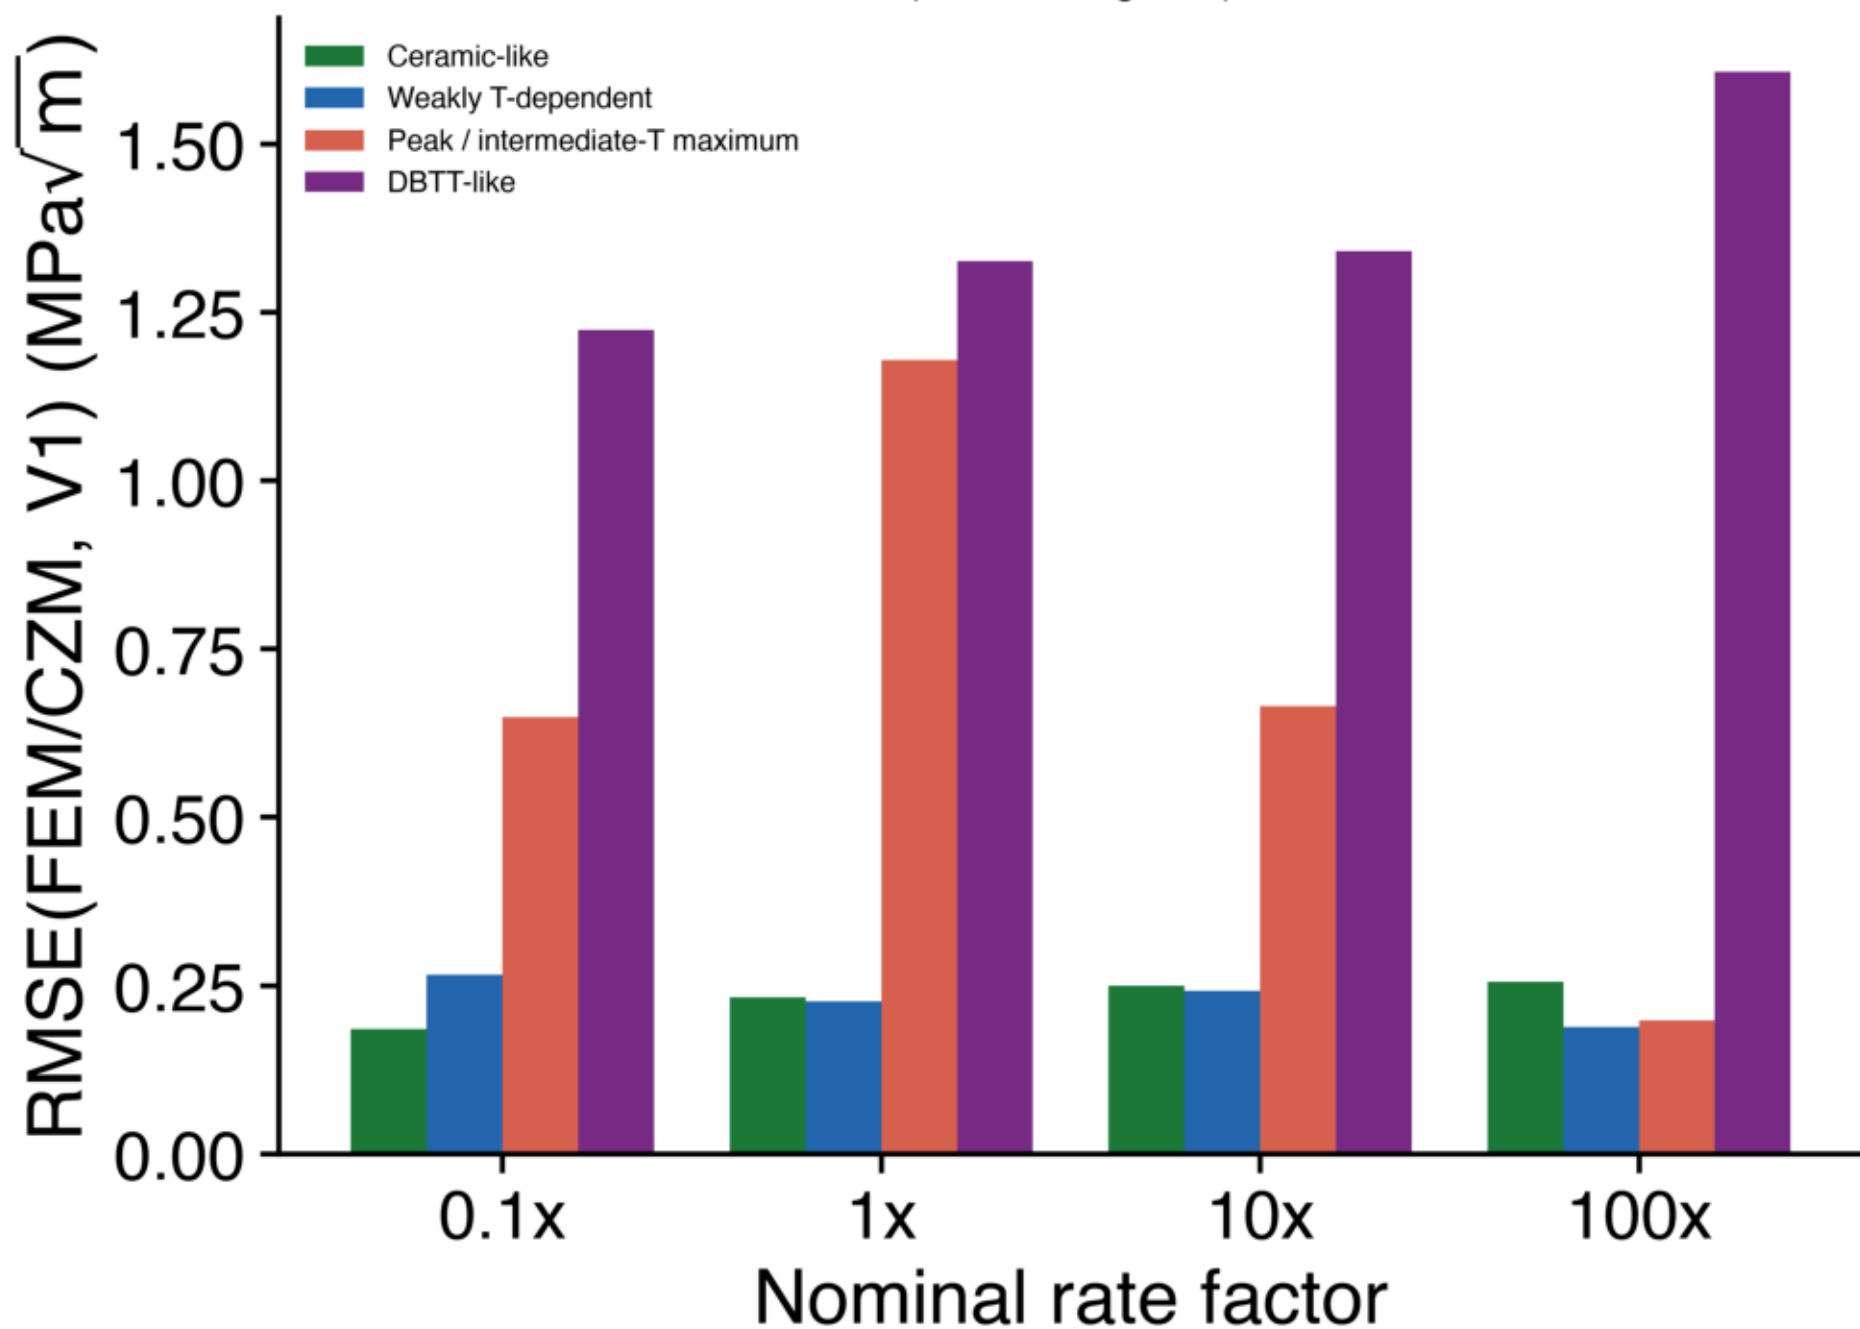


SI Figure 3. Saturation-fit residuals (class-mean curve minus  $K_R(\Delta a)$  fit), from an independent refit


SI Figure 4. Complete rate x class RMSE table  
(underlies Figure 4)

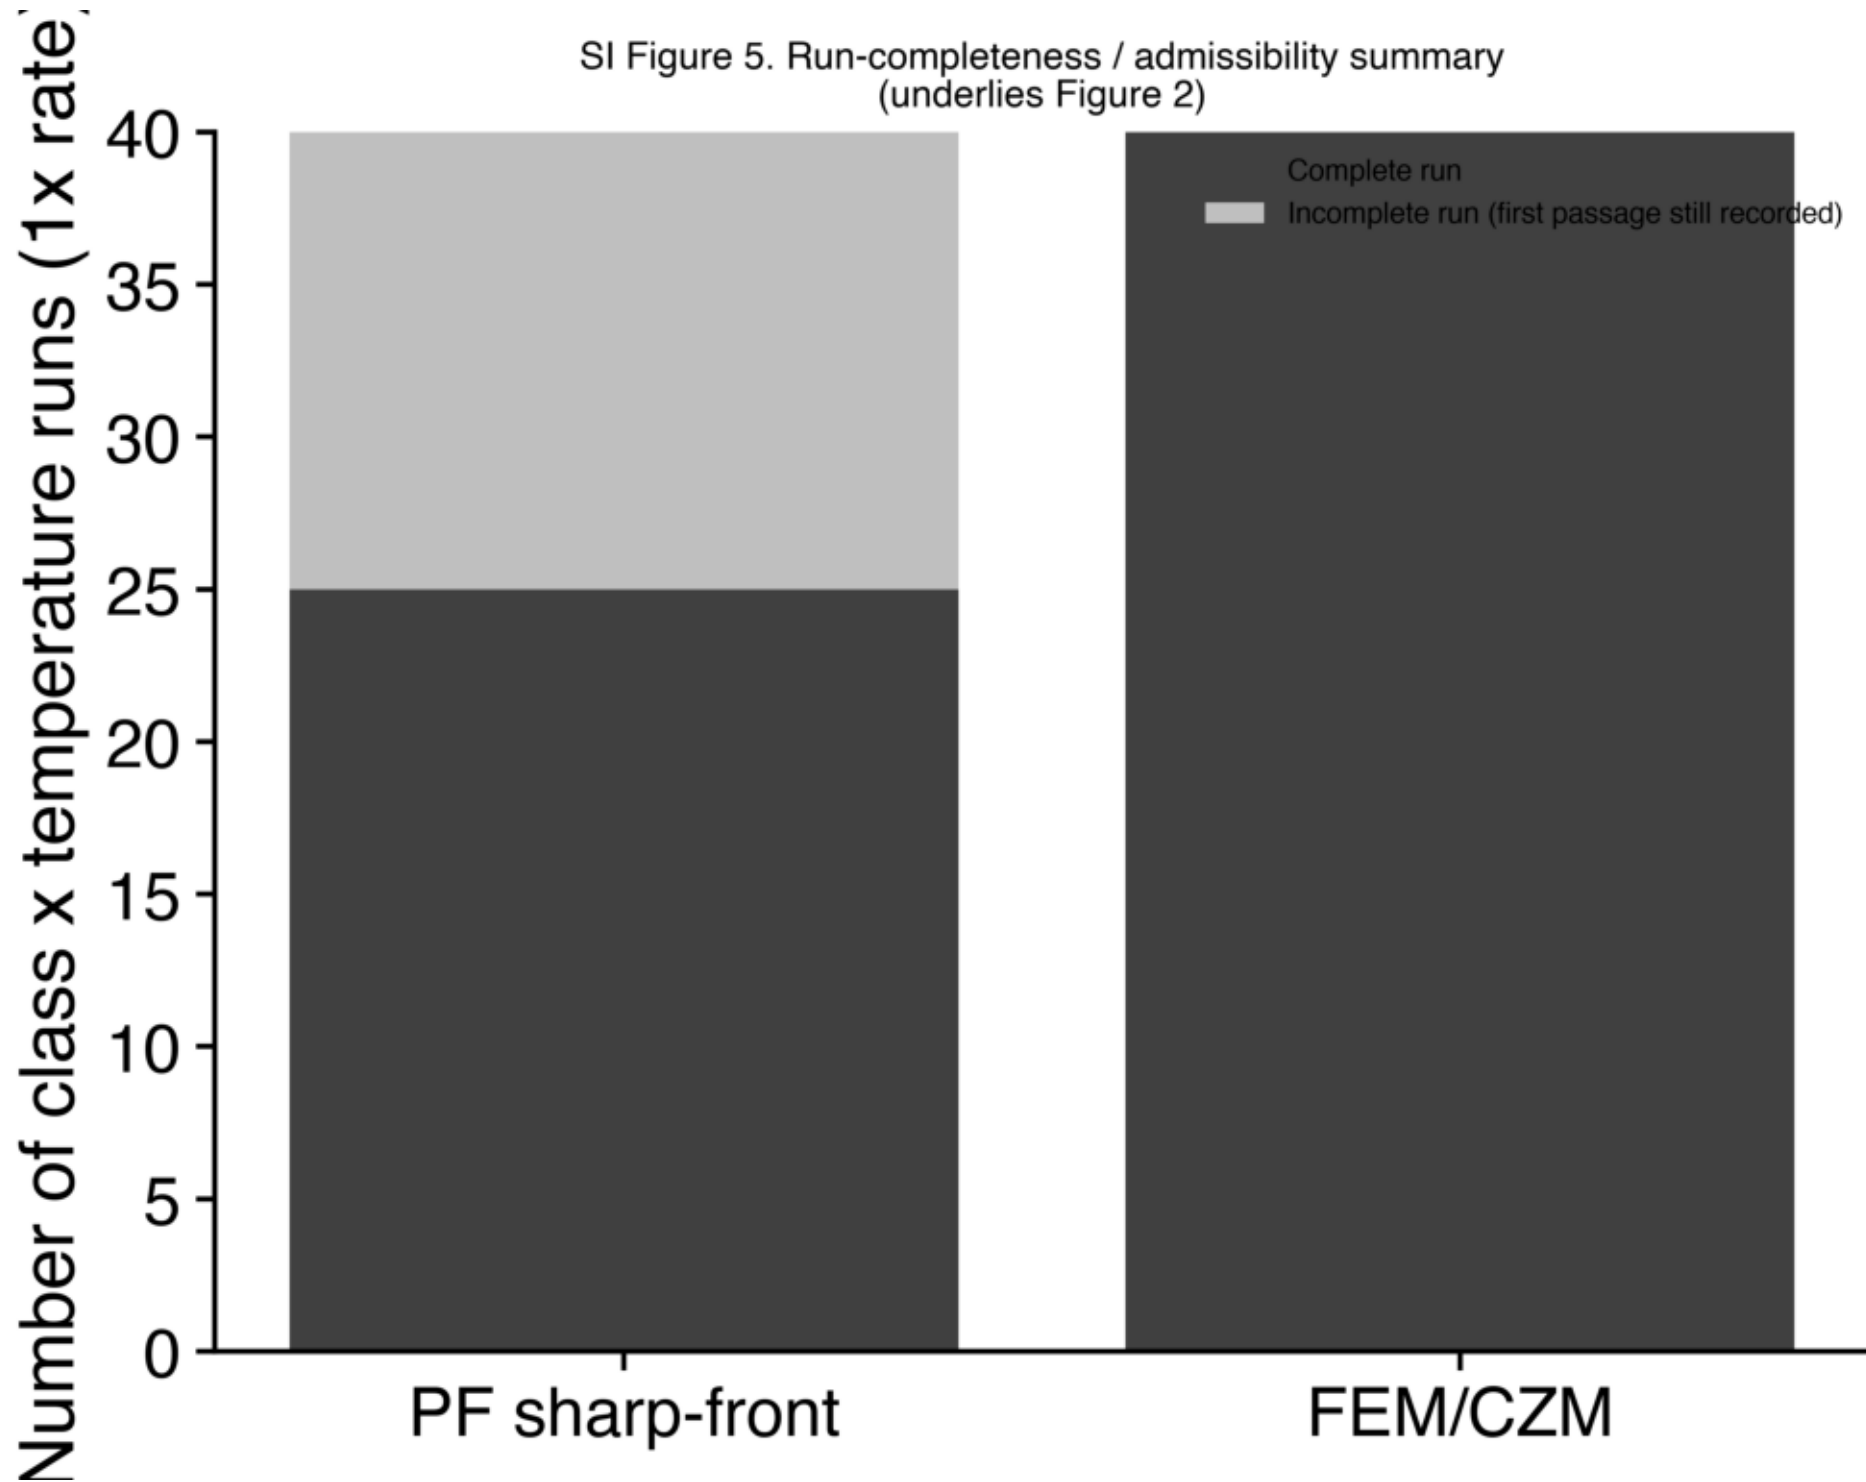


# SI: SI\_Fig6\_context\_specific\_Kc\_DKth\_fits

SI Figure 6. Six context-specific  $K_c$ - $\Delta K_{th}$  log-space fits (underlies Figure 6B)

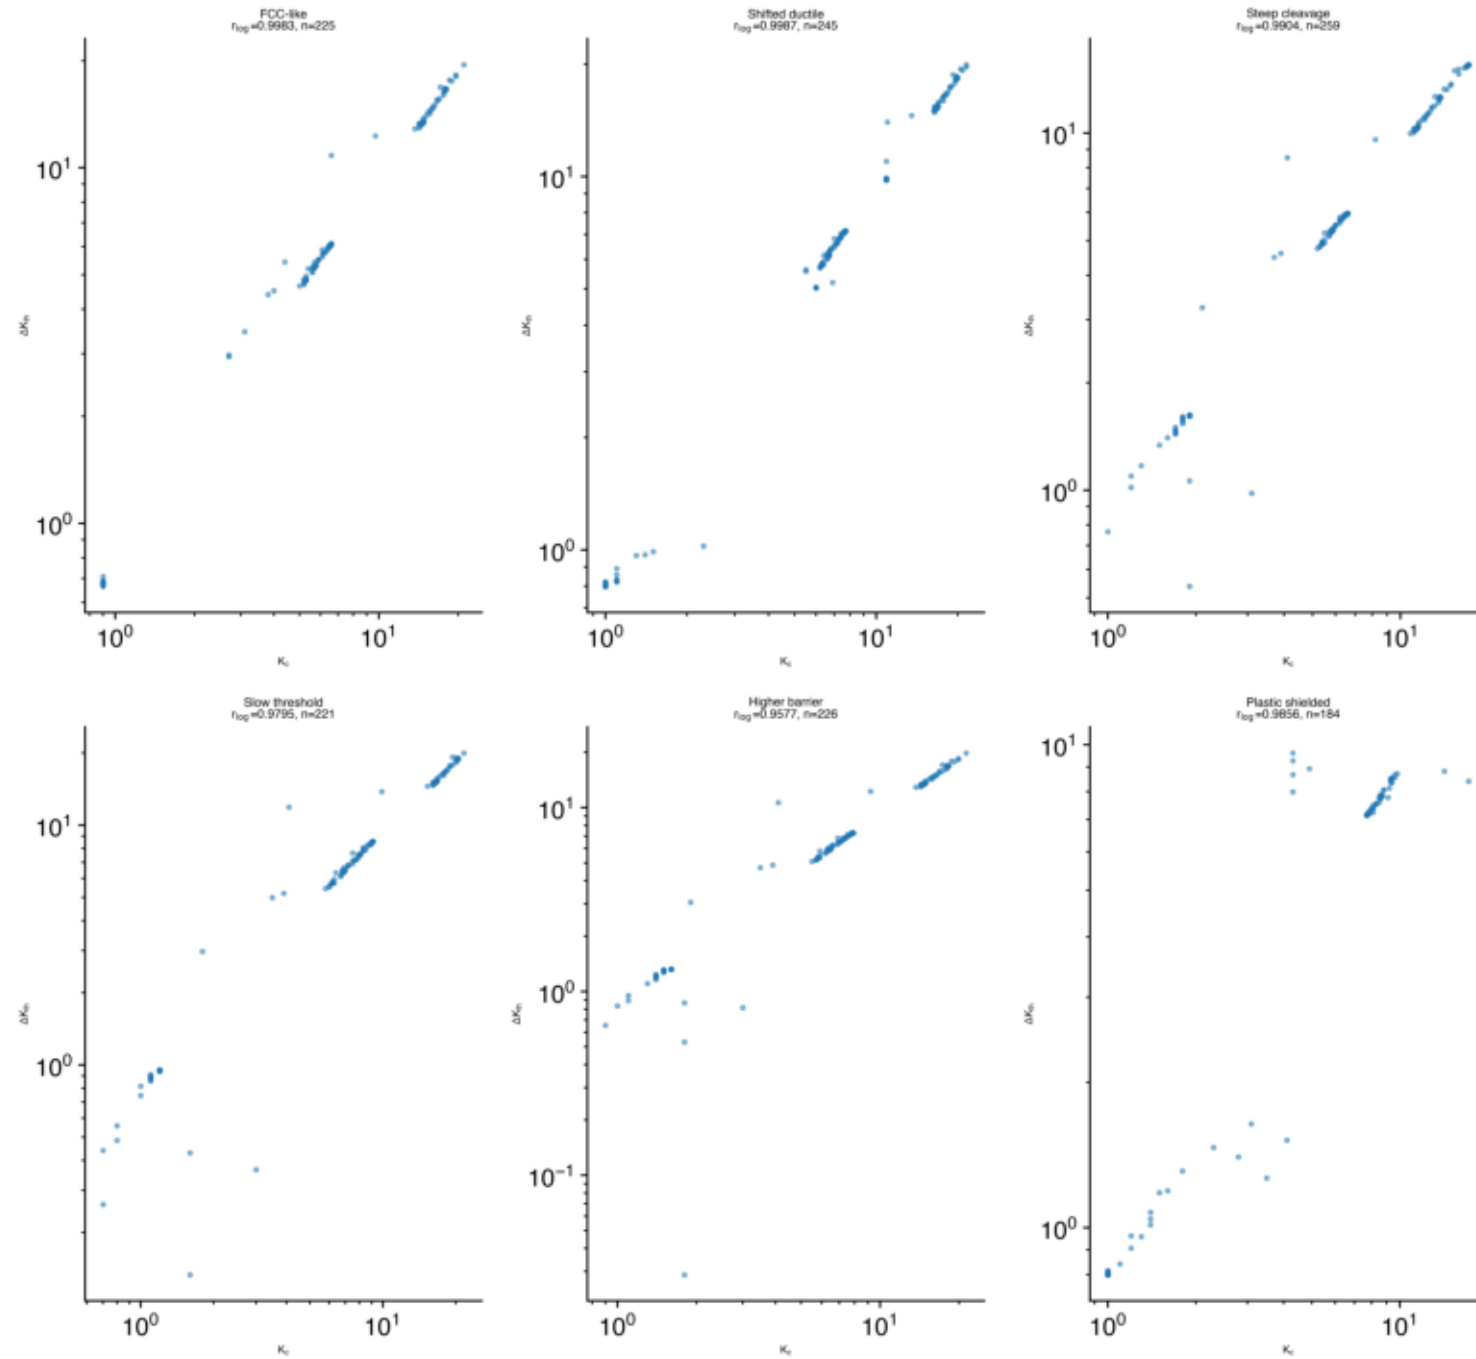

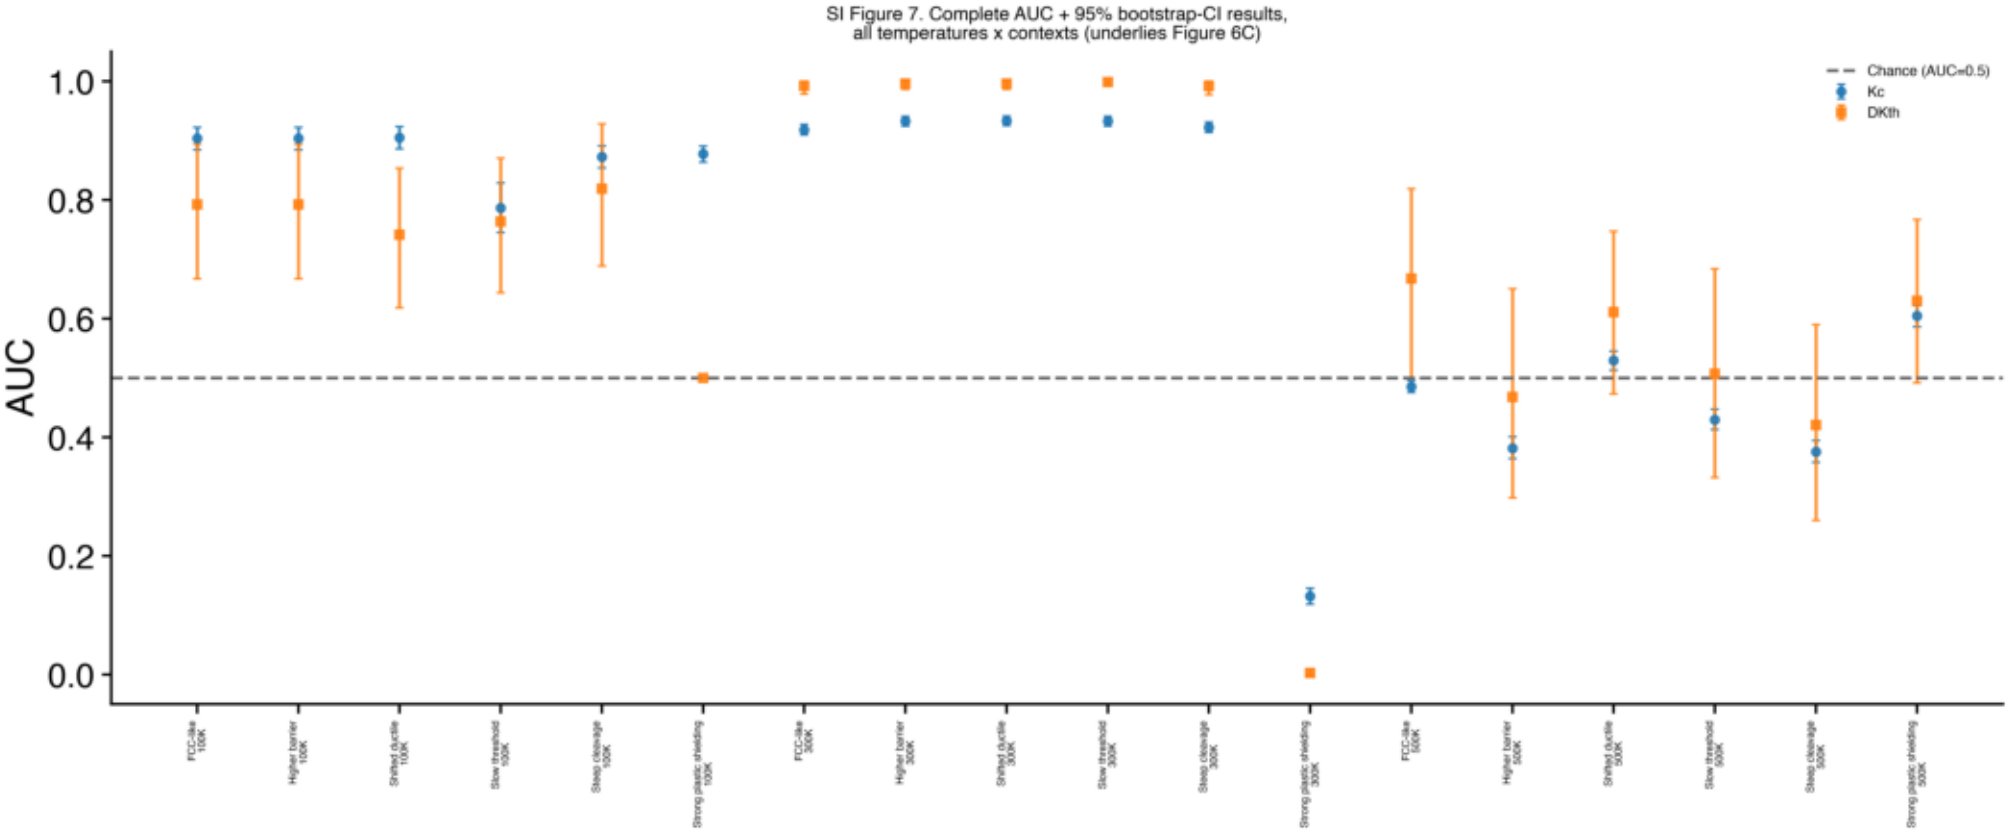

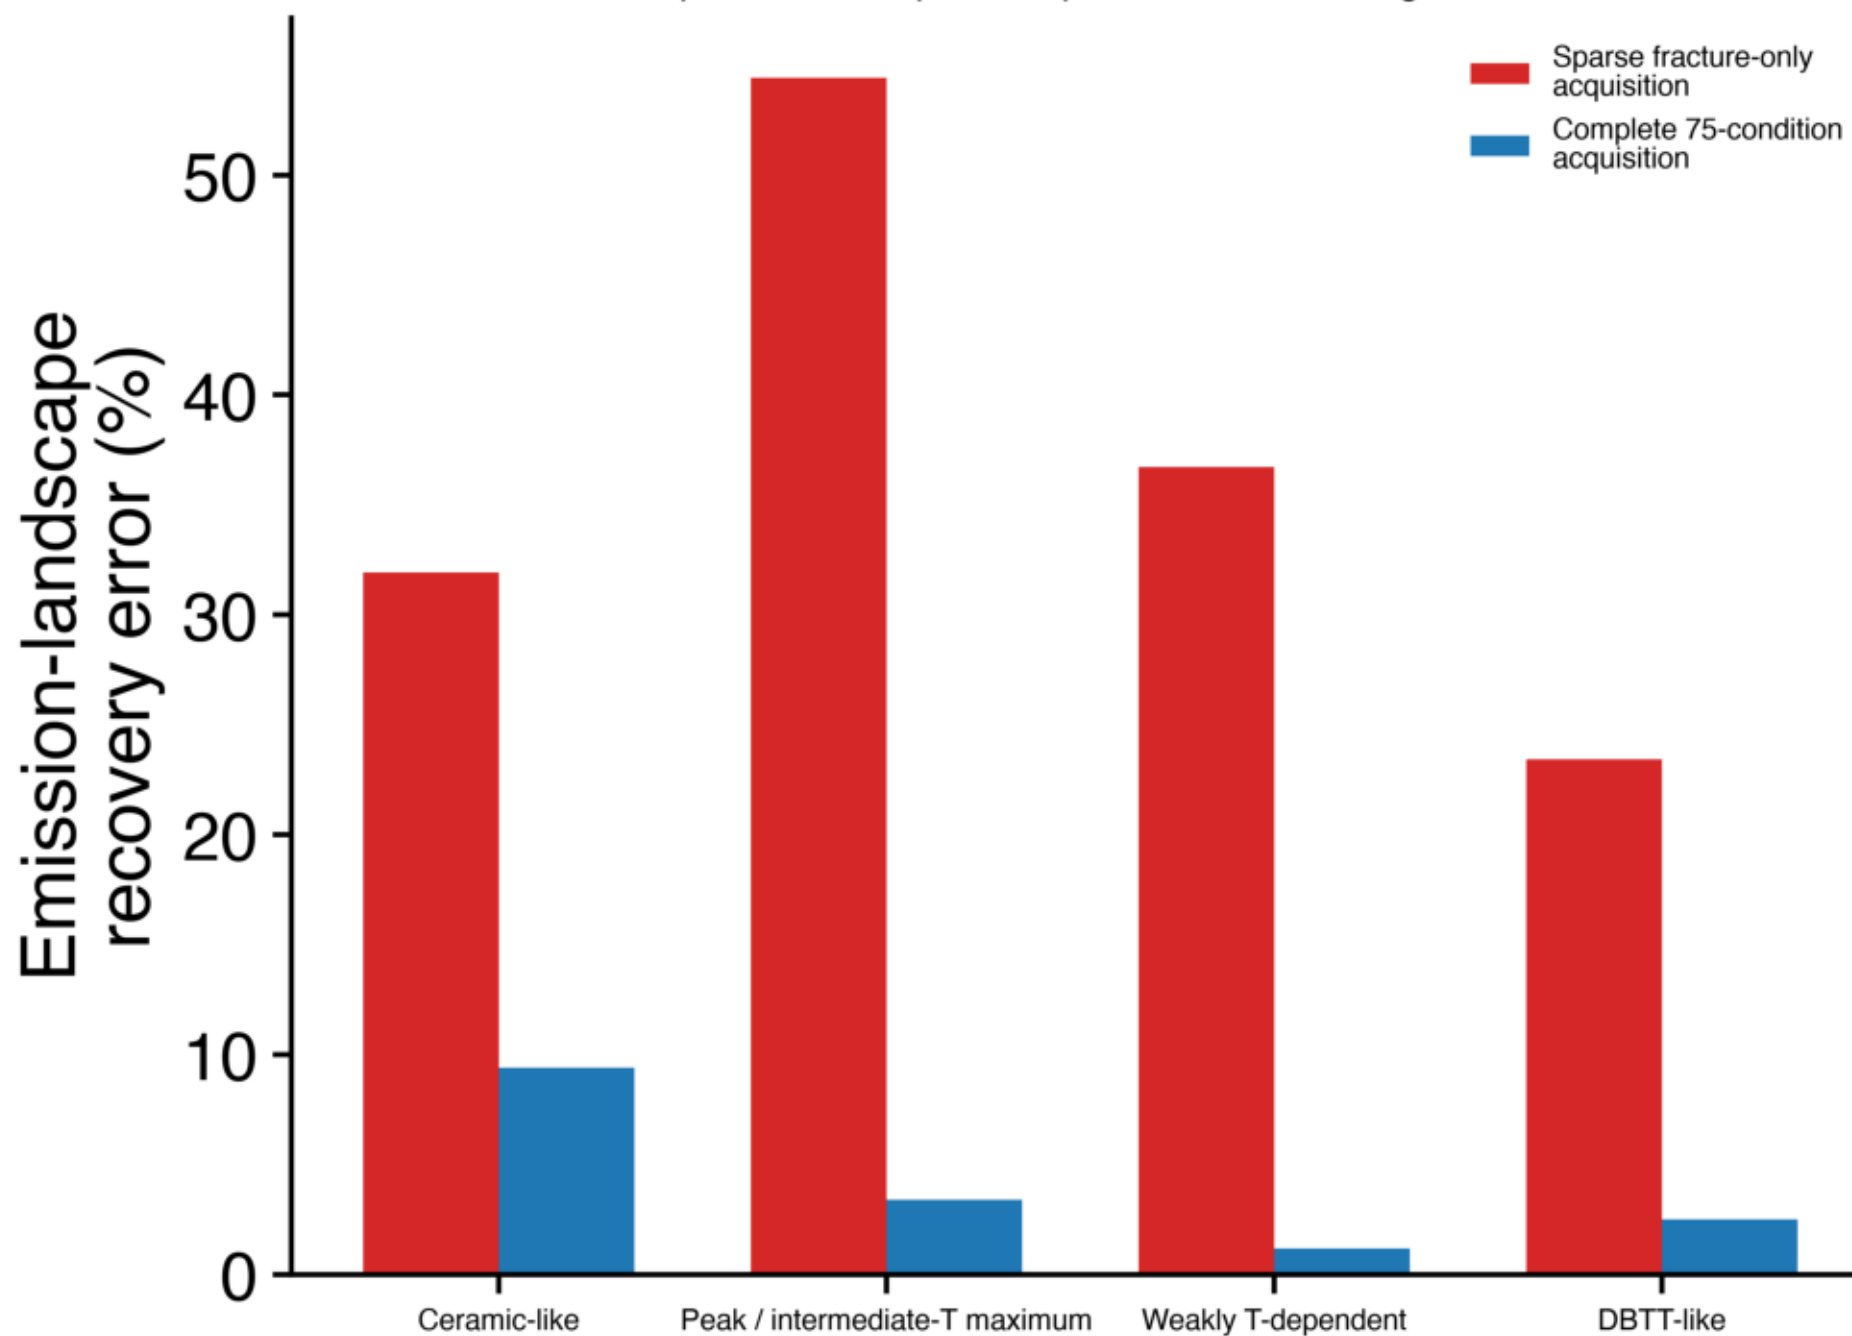SI Figure 8. Synthetic-identifiability recovery error:  
sparse vs. complete acquisition, 4 hidden regimes



SI Figure 9. Full V1 continuation-path parameter map  
(underlies Figure 1A/B)