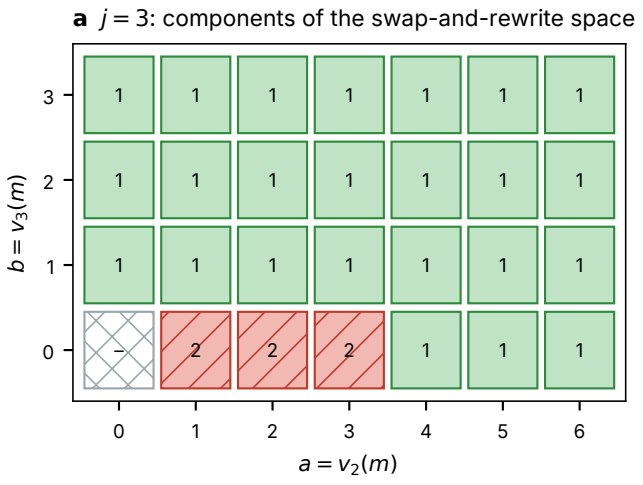
a j = 3: components of the swap-and-rewrite space
b the family F_j
$2^4\,3^j \leftrightarrow 1 \cdot 8^2\,3^j$
connected iff $b \geq 1$ or $a \geq 4$;
otherwise two components,
one swap class per content.
saturation bound: $P(C) = 2^6\,3^j$
true exposure threshold: 2^4 or 3
cells: "–" content not realisable; 1/2 = #components.
Checked here for $j \leq 6$ (183 cases);
proved for all j (B-T9).
$b = v_3(m)$
$a = v_2(m)$
0 1 2 3 4 5 6
0 1 2 3
– 2 2 2 1 1 1
1 1 1 1 1 1 1
1 1 1 1 1 1 1
1 1 1 1 1 1 1