1. 基础原理

贝叶斯多分类也用的贝叶斯公式：

与贝叶斯分类的不同之处在于贝叶斯多分类的类别较多，也就是上述公式中的A的值会有多个。

1.1 准备数据

三类散点，分别为“喜欢你”、“无所谓”、“讨厌你”，这里准备了共21个点作为数据，将其抽象成散点分布在二维坐标中，其分布如下图所示：

蓝色点的坐标分别为：[1.9, 1.2]，[1.5, 2.1]，[1.9, 0.5]，[1.5, 0.9]，[0.9, 1.2]，[1.1, 1.7]，[1.4, 1.1]。

红色点的坐标分别为：[3.2, 3.2]，[3.7, 2.9]，[3.2, 2.6]，[1.7, 3.3]，[3.4, 2.6]，[4.1, 2.3]，[3.0, 2.9]。

绿色点的坐标分别为：[3.3, 1.2]，[3.8, 0.9]，[3.3, 0.6]，[2.8, 1.3]，[3.5, 0.6]，[4.2, 0.3]，[3.1, 0.9]。

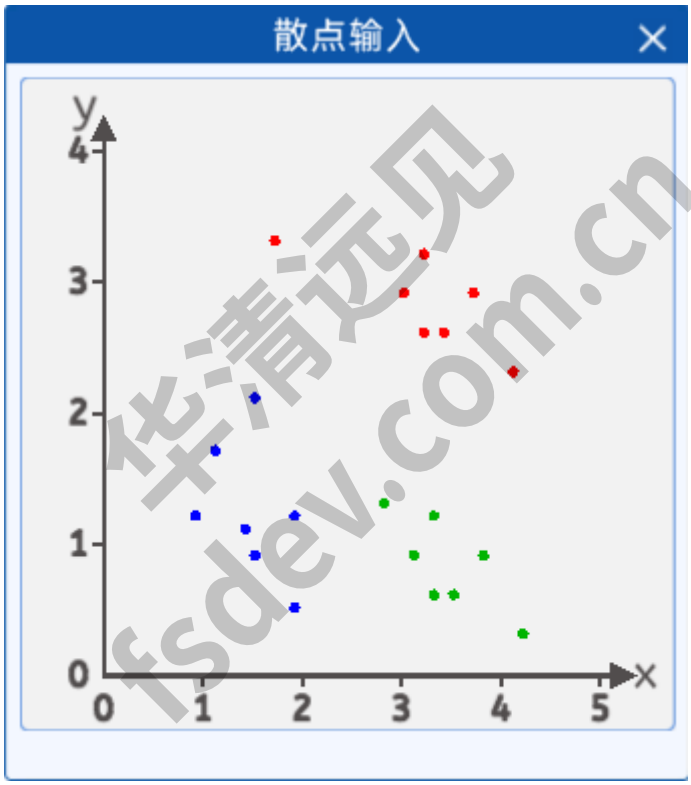

华清远见 fsdev.com.cn

1.2 计算先验概率

“红色点”的先验概率就是“红色点”的个数除以总个数；“蓝色点”的先验概率就是“蓝色点”的个数除以总个数；“绿色点”的先验概率就是“绿色点”的个数除以邮件的总个数。对应到散点图中，就是各类点的个数除以点的总个数。

1.3 计算概率密度函数值

由于设置其符合高斯多元分布，所以这里使用的是高斯分布概率密度函数。其公式为：

$$\rho(x) = \frac{1}{(2\pi)^{\frac{n}{2}}|\Sigma|^{\frac{1}{2}}} \cdot e^{-\frac{1}{2}(x-\mu)^T\Sigma^{-1}(x-\mu)}$$

其中，x 是n维随机向量；

μ 是长度为n的均值向量；

Σ 是n×n的协方差矩阵；

T 表示向量的转置；

将每一类的对应数据带入该公式中，即可求得对应每一类的概率密度值。

1.4 计算后验概率

有了先验概率和概率密度函数后，就可以求解后验概率了，通过将所有的点带入求得最大后验概率后，就可以在二维坐标中通过等高线绘制出分类边界了。

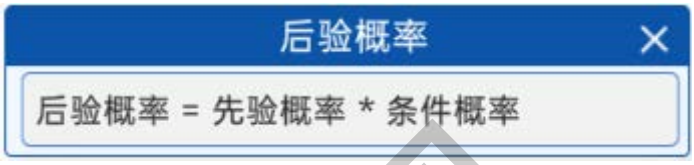

1.5 显示决策边界

决策边界是俯视图，三类点的标签分别是0、1、2，等高线的高度是0.5和1.5两条。

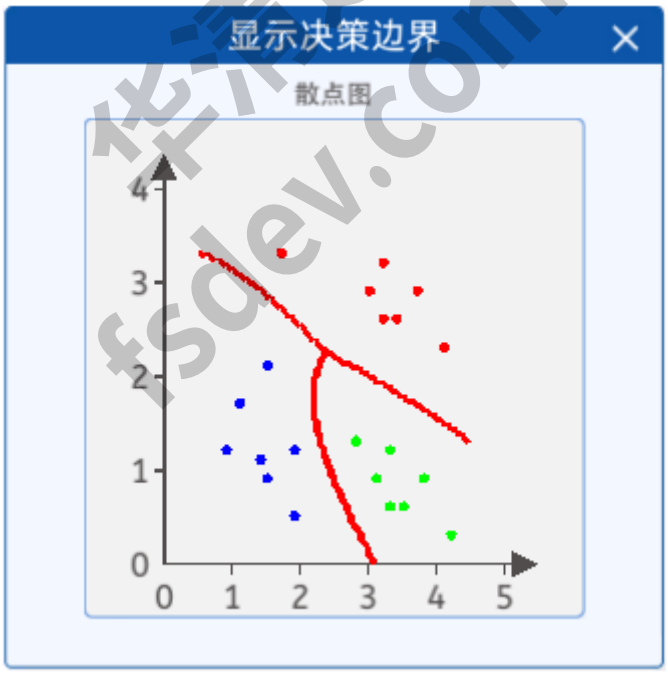

2. 编程实例与步骤

需要默认打开“华清远见人工智能虚拟仿真”和“华清远见人工智能虚拟仿真本地服务管理平台”。

2.1（可选）使用“华清远见人工智能虚拟仿真本地服务管理平台”启动服务。

服务启动一次之后就不需要再次启动了。

华清远见 fsdev.com.cn

单击贝叶斯分类实验进入

如果之前进入了某个实验，可以在实验面板的右上角点击“返回”回到主页即可。

2.2 拖出组件并连线

根据上述实验原理，将我们的逻辑抽象成组件之后，连线如下图所示。

华清远见 fsdev.com.cn

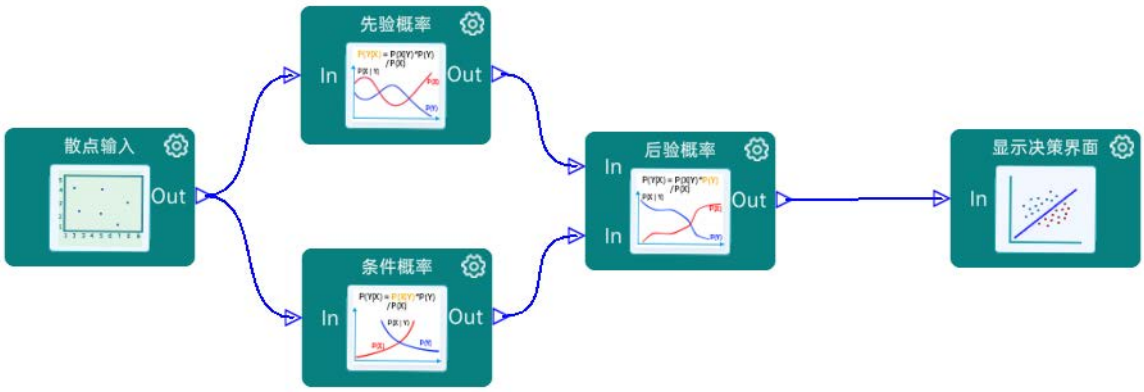

2.3 验证

点击验证，如显示校验成功，即代表逻辑无误，验证按钮与校验成功界面如下图所示。

华清远见 fsdev.com.cn

2.4 运行

点击运行，可以实现功能运行，并显示结果输出，如下图所示。

华清远见 HQYJ.COM

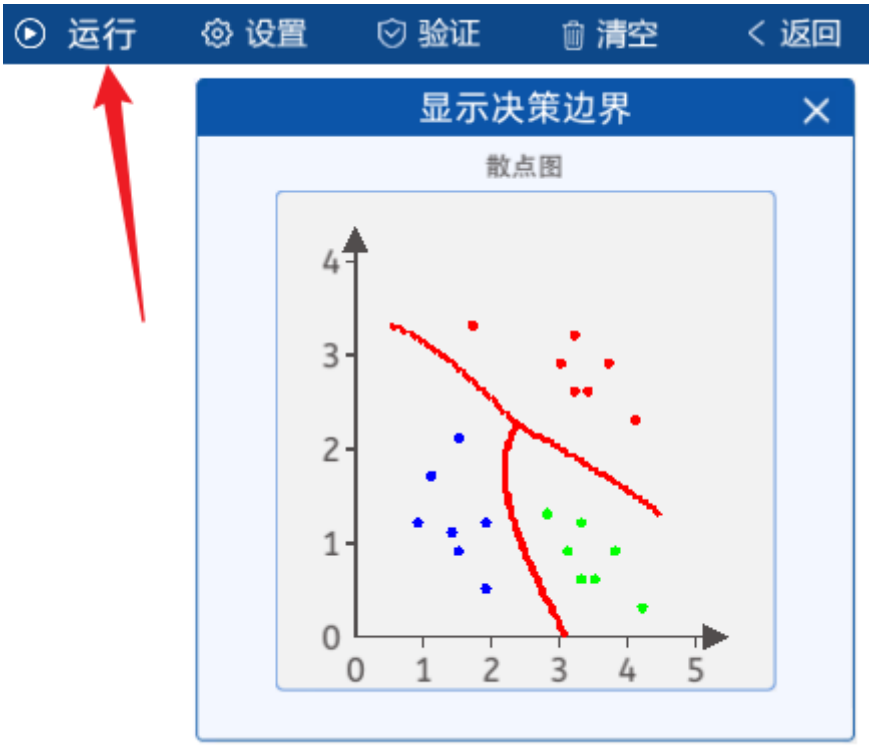

2.5 代码生成

点击界面左下角的生成代码按钮，可生成本实验的Python代码，生成代码按钮如下图所示。

点击后可以查看该实验代码，代码会根据界面所选参数进行适配，点击复制可以将其复制，并粘贴在其它地方。

这里我们可以粘贴到软件的Jupyter中运行，“华清远见人工智能虚拟仿真本地服务管理平台”打开Jupyter，第一次打开Jupyter需要点击“打开CMD命令”，打开Jupyter后无需再次打开CMD，如下图所示。

华清远见 fcdev.com.cn

在弹出的CMD命令行中，输入python -m jupyterlab --notebook-dir .\\learn，点击回车，浏览器会自动跳转打开Jupyter，如下图所示。

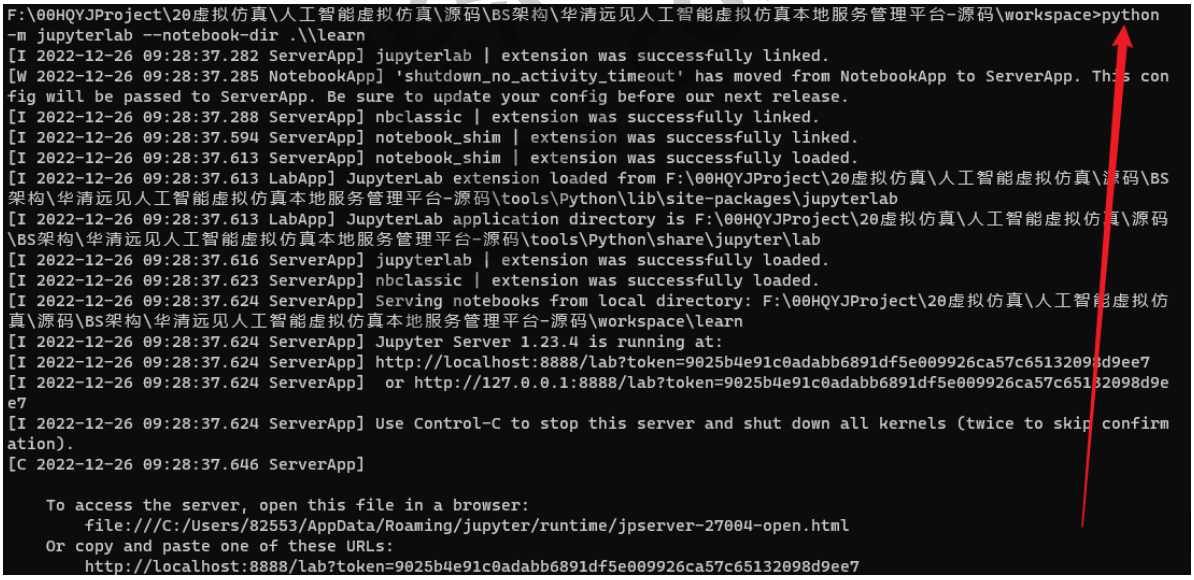

```
F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿真\源码\BS架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\workspace>python
-m jupyterlab --notebook-dir .\\learn
[I 2022-12-26 09:28:37.282 ServerApp] jupyterlab | extension was successfully linked.
[W 2022-12-26 09:28:37.285 NotebookApp] 'shutdown_no_activity_timeout' has moved from NotebookApp to ServerApp. This con
fig will be passed to ServerApp. Be sure to update your config before our next release.
[I 2022-12-26 09:28:37.288 ServerApp] nbclassic | extension was successfully linked.
[I 2022-12-26 09:28:37.594 ServerApp] notebook_shim | extension was successfully linked.
[I 2022-12-26 09:28:37.613 ServerApp] notebook_shim | extension was successfully loaded.
[I 2022-12-26 09:28:37.613 LabApp] JupyterLab extension loaded from F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿真\源码\BS
架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\tools\Python\lib\site-packages\jupyterlab
[I 2022-12-26 09:28:37.613 LabApp] JupyterLab application directory is F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿真\源码
\BS架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\tools\Python\share\jupyter\lab
[I 2022-12-26 09:28:37.616 ServerApp] jupyterlab | extension was successfully loaded.
[I 2022-12-26 09:28:37.623 ServerApp] nbclassic | extension was successfully loaded.
[I 2022-12-26 09:28:37.624 ServerApp] Serving notebooks from local directory: F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿
真\源码\BS架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\workspace\learn
[I 2022-12-26 09:28:37.624 ServerApp] Jupyter Server 1.23.4 is running at:
[I 2022-12-26 09:28:37.624 ServerApp] http://localhost:8888/lab?token=9025b4e91c0adabb6891df5e009926ca57c65132098d9ee7
[I 2022-12-26 09:28:37.624 ServerApp]  or http://127.0.0.1:8888/lab?token=9025b4e91c0adabb6891df5e009926ca57c65132098d9e
e7
[I 2022-12-26 09:28:37.624 ServerApp] Use Control-C to stop this server and shut down all kernels (twice to skip confirm
ation).
[C 2022-12-26 09:28:37.646 ServerApp]

    To access the server, open this file in a browser:
        file:///C:/Users/82553/AppData/Roaming/jupyter/runtime/jpserver-27004-open.html
    Or copy and paste one of these URLs:
        http://localhost:8888/lab?token=9025b4e91c0adabb6891df5e009926ca57c65132098d9ee7
```

如果没有自动跳转和打开浏览器，请输入下图中圈出的内容，每个人的该内容不一致，请复制自己的 弹出的。

```
F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿真\源码\BS架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\workspace>python
-m jupyterlab --notebook-dir .\\learn
[I 2022-12-26 09:28:37.282 ServerApp] jupyterlab | extension was successfully linked.
[W 2022-12-26 09:28:37.285 NotebookApp] 'shutdown_no_activity_timeout' has moved from NotebookApp to ServerApp. This con
fig will be passed to ServerApp. Be sure to update your config before our next release.
[I 2022-12-26 09:28:37.288 ServerApp] nbclassic | extension was successfully linked.
[I 2022-12-26 09:28:37.594 ServerApp] notebook_shim | extension was successfully linked.
[I 2022-12-26 09:28:37.613 ServerApp] notebook_shim | extension was successfully loaded.
[I 2022-12-26 09:28:37.613 LabApp] JupyterLab extension loaded from F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿真\源码\BS
架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\tools\Python\lib\site-packages\jupyterlab
[I 2022-12-26 09:28:37.613 LabApp] JupyterLab application directory is F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿真\源码
\BS架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\tools\Python\share\jupyter\lab
[I 2022-12-26 09:28:37.616 ServerApp] jupyterlab | extension was successfully loaded.
[I 2022-12-26 09:28:37.623 ServerApp] nbclassic | extension was successfully loaded.
[I 2022-12-26 09:28:37.624 ServerApp] Serving notebooks from local directory: F:\00HQYJProject\20虚拟仿真\人工智能虚拟仿
真\源码\BS架构\华清远见人工智能虚拟仿真本地服务管理平台-源码\workspace\learn
[I 2022-12-26 09:28:37.624 ServerApp] Jupyter Server 1.23.4 is running at:
[I 2022-12-26 09:28:37.624 ServerApp] http://localhost:8888/lab?token=9025b4e91c0adabb6891df5e009926ca57c65132098d9ee7
[I 2022-12-26 09:28:37.624 ServerApp]  or http://127.0.0.1:8888/lab?token=9025b4e91c0adabb6891df5e009926ca57c65132098d9e
e7
[I 2022-12-26 09:28:37.624 ServerApp] Use Control-C to stop this server and shut down all kernels (twice to skip confirm
ation).
[C 2022-12-26 09:28:37.646 ServerApp]

    To access the server, open this file in a browser:
        file:///C:/Users/82553/AppData/Roaming/jupyter/runtime/jpserver-27004-open.html
    Or copy and paste one of these URLs:
        http://localhost:8888/lab?token=9025b4e91c0adabb6891df5e009926ca57c65132098d9ee7
```

将代码输入到jupyter中，点击运行可以查看结果。

3. 实验现象
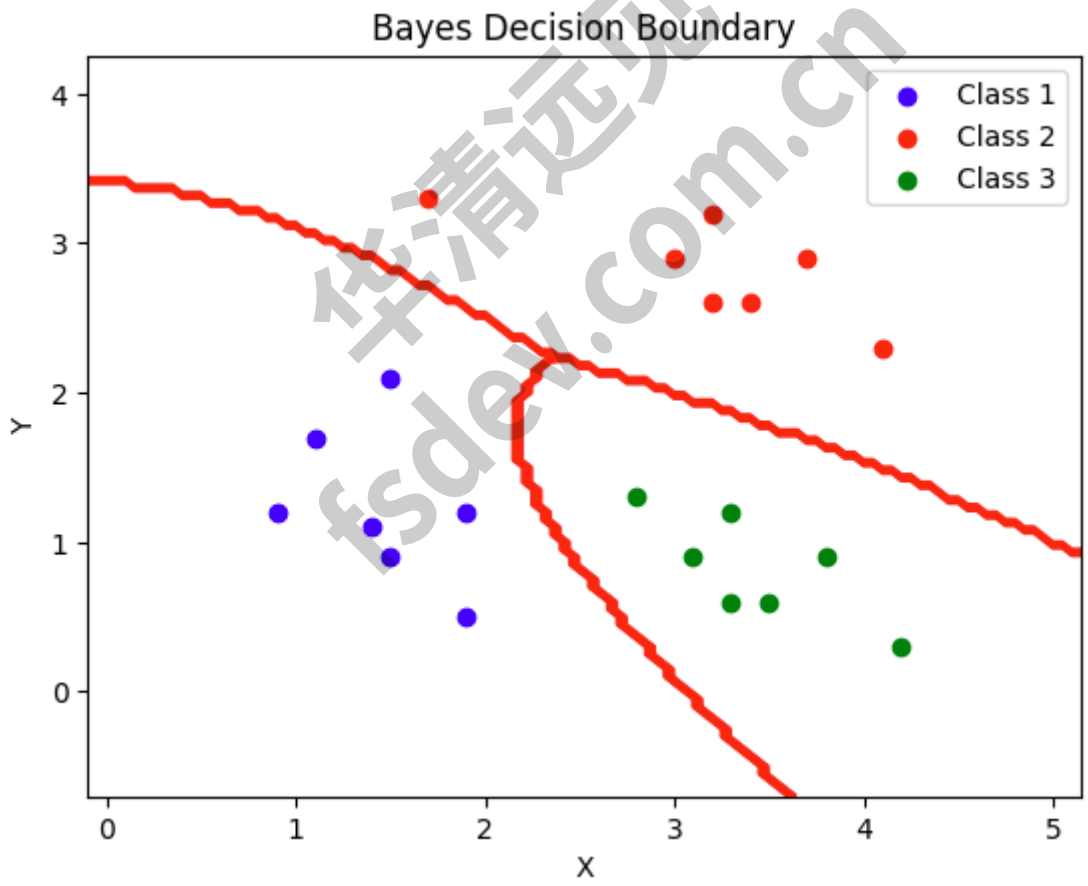
实验结果为：