



SPICY PIZZA



HOME

ABOUT

MORE

SQL SHOPS PIZZA PROJECT

MySQL

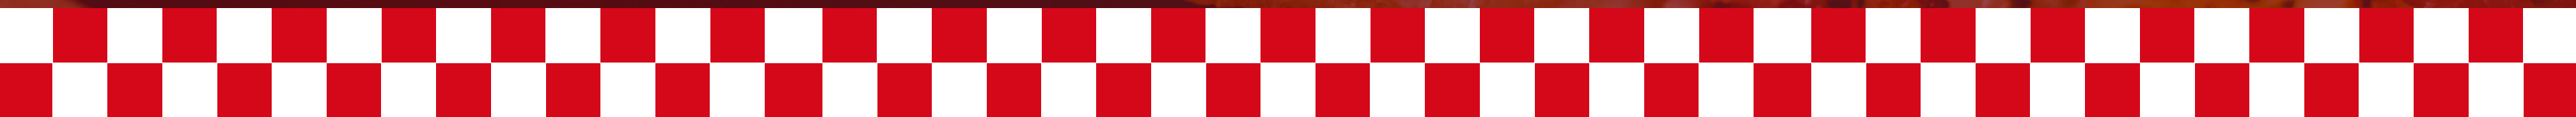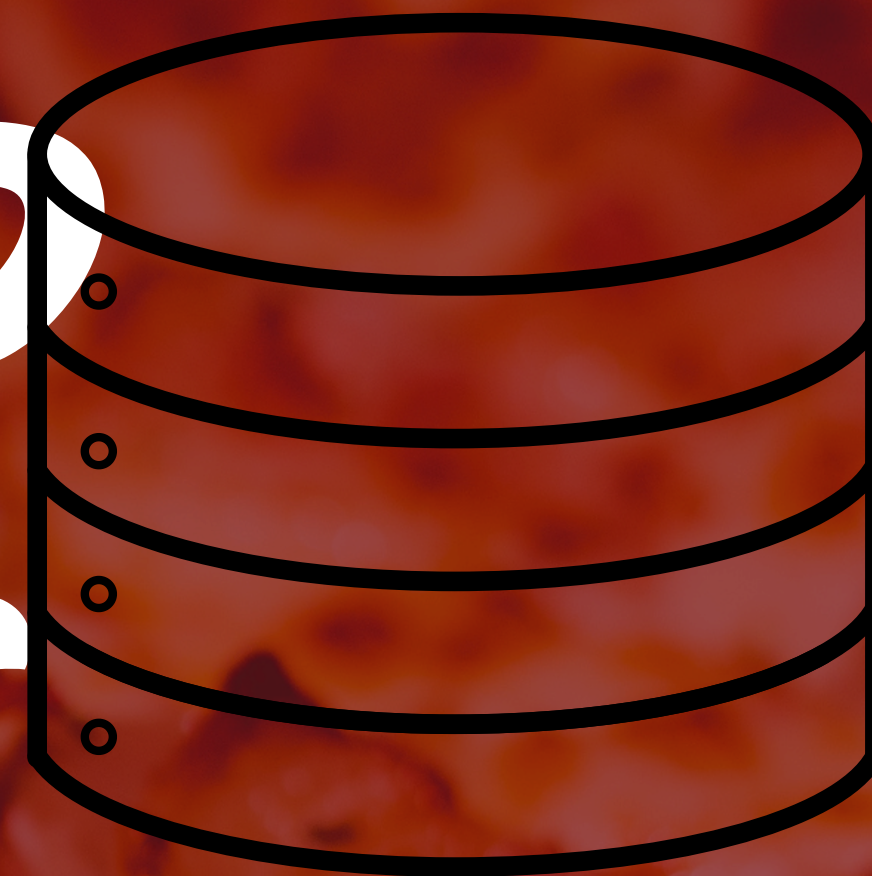



PIZZA STORE

HOME

ABOUT

MORE



My Introduction

My name is Umar. I am a philosophy graduate who is currently transitioning into the field of data analytics. I have been developing practical skills in SQL, Python, Power BI and Excel to analyze data and extract meaningful insights. In this project, I worked on a pizza shop dataset where I used SQL queries to explore sales patterns, customer behavior, and business performance.



PIZZA STORE

HOME

ABOUT

MORE

Project Objectives (Business Questions)

In this project, SQL was used to analyze a pizza shop sales dataset and answer key business questions related to sales performance, customer ordering behavior, and revenue generation.





3 Types of Business Questions were solved!



1. Basic Level Analysis

At this stage, simple SQL queries were used to understand the overall performance of the pizza shop, such as total orders, total revenue, most popular pizza sizes, and the most frequently ordered pizza types.



Intermediate Level Analysis

This level involved joining multiple tables and performing deeper analysis to explore ordering patterns, category-wise performance, and the average number of pizzas ordered per day.



Advanced Level Analysis

In the advanced stage, more complex queries were applied to generate strategic insights, such as revenue contribution of each pizza type, cumulative revenue over time, and the top-performing pizzas within each category.




PSPICY PIZZA

HOME

ABOUT

MORE

Basic Questions

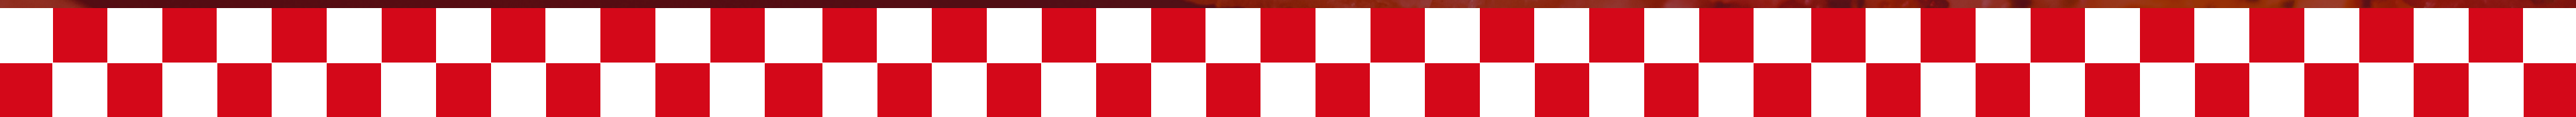



Retrieve the total number of orders placed.

```
• select count(order_id) from orders;
```



Calculate the total revenue generated from pizza sales.

SELECT

```
ROUND(SUM(pizzas.price * orders_details.quantity),  
2) AS total_revenue
```

FROM

orders_details

JOIN

pizzas **ON** orders_details.pizza_id = pizzas.pizza_id



Identify the highest-priced pizza

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
        pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```



Identify the most common pizza size ordered.

```
SELECT
    pizzas.size,
    COUNT(orders_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC LIMIT 1;
```



List the top 5 most ordered pizza types along with their quantities.

```
SELECT
    pizza_types.name,
    SUM(orders_details.quantity) AS order_quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY order_quantity DESC
LIMIT 5;
```




PSPICY PIZZA

HOME

ABOUT

MORE

Intermediate Questions

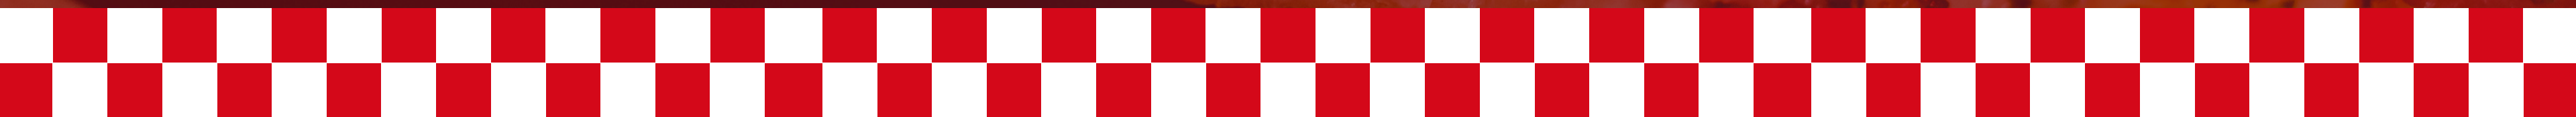



Join the necessary tables to find the total quantity of each pizza category ordered.

```
SELECT
    pizza_types.category,
    SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```



Determine the distribution of orders by hour of the day.

```
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```



Join relevant tables to find the category-wise distribution of pizzas.

```
SELECT  
    pizza_types.category, COUNT(pizza_types.name)  
FROM  
    pizza_types  
GROUP BY pizza_types.category
```



Group the orders by date and calculate the average number of pizzas ordered per day.

```
select orders.ordre_date , sum(orders_details.quantity) as avg_orders
from orders join orders_details
on orders.order_id = orders_details.order_id
group by orders.ordre_date
```



Determine the top 3 most ordered pizza types based on revenue.

```
SELECT
    pizza_types.name,
    SUM(orders_details.quantity * pizzas.price) AS revnue
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revnue DESC
LIMIT 3;
```



PSPICY PIZZA

HOME

ABOUT

MORE

Advance Questions



Calculate the percentage contribution of each pizza type to total revenue.

```
select pizza_types.category ,  
  
       round(sum(orders_details.quantity * pizzas.price) / (SELECT  
       ROUND(SUM(pizzas.price * orders_details.quantity),  
               2) AS total_revenue  
  
FROM  
  
       orders_details  
       JOIN  
       pizzas ON orders_details.pizza_id = pizzas.pizza_id)*100,2) as revenue  
  
from pizza_types join pizzas  
on pizza_types.pizza_type_id = pizzas.pizza_type_id  
join orders_details  
on orders_details.pizza_id = pizzas.pizza_id  
group by pizza_types.category order by revenue desc;
```



Analyze the cumulative revenue generated over time.

```
select orders.ordre_date,  
sum(revenue) over (order by ordre_date) as cum_revenue  
from  
(select orders.ordre_date,  
sum(orders_details.quantity * pizzas.price) as revenue  
from orders_details join pizzas  
on orders_details.pizza_id = pizzas.pizza_id  
join orders  
on orders.order_id = orders_details.order_id  
group by orders.ordre_date) as sales;
```



Determine the top 3 most ordered pizza types based on revenue for each pizza category.

```
select name, revenue
from
(select category, name, revenue, rank() over (partition by category order by revenue desc) as rn
from
(select pizza_types.category,
pizza_types.name,
sum(pizzas.price * orders_details.quantity) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join orders_details
on orders_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn<=3;
```



PIZZA STORE

HOME

ABOUT

MORE

Thank you!



UMAR-DATA-ANALYST

