

**LAPORAN TUGAS ALGORITMA PEMOGRAMAN
TENTANG BAHASA NATURAL, FLOWCHART, PSUDOCODE, JAVA
TUGAS PEKAN 8
GUI OERATOR LOGIKA**



disusun Oleh:

**UMAR ABDUL AZIZ
NIM 2511532012
KELAS IF B**

**DOSEN PENGAMPU :Dr.WAHYUDI S.T , M.T
ASISTEN LABORATORIUM: Muhammad Zaki Al Hafiz**


**DEPARTEMEN INFORMATIKA
FAKULTAS TEKNOLOGI INFORMASI
UNIVERSITAS ANDALAS**

PADANG , 2025

PSUDOCODE

Judul : Operator Logika GUI
Deklarasi : Boolean A1 Boolean A2
Pemograman : Input Boolean A1 Input Boolean A2 Konjungsi = A1 sama dengan A2 Disjungsi = A1 tidak sama dengan A2 Print

Flowchart

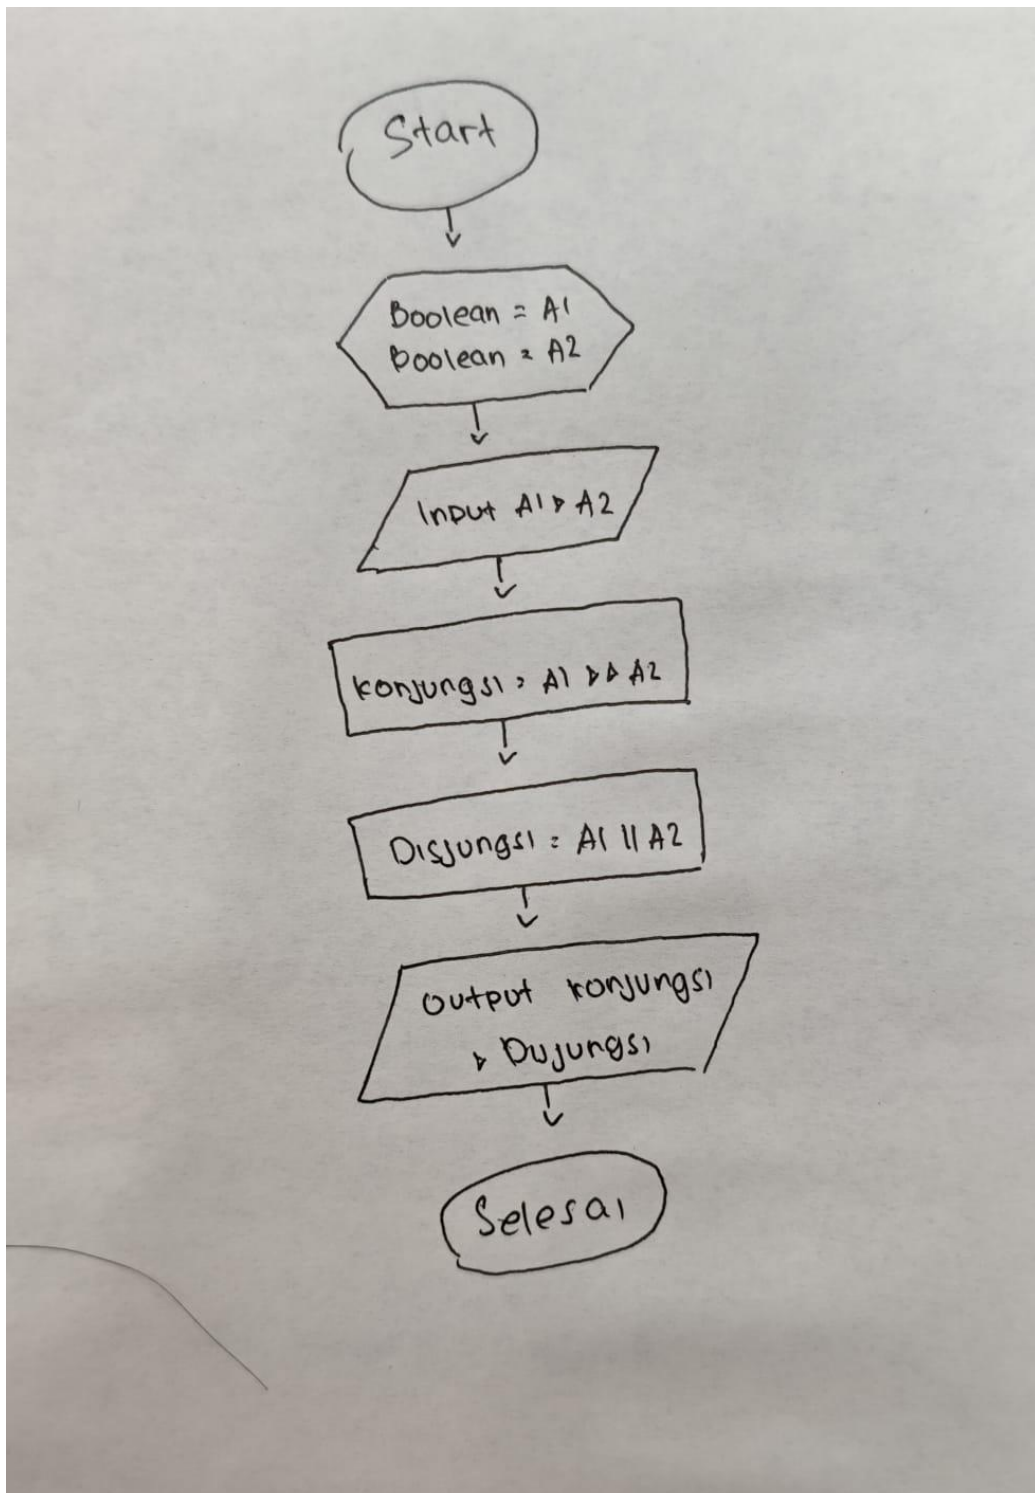

Java

```
package tugas_laprak;

import java.awt.EventQueue;

import javax.swing.JFrame;
import javax.swing.JPanel;
import javax.swing.border.EmptyBorder;
import javax.swing.JLabel;
import javax.swing.JButton;
import javax.swing.JTextField;
import java.awt.event.ActionListener;
import java.awt.event.ActionEvent;

public class OperatorLogika_2511532012 extends JFrame {

    private static final long serialVersionUID = 1L;
    private JPanel contentPane;
    private JTextField txtAngka1;
    private JTextField txtAngka2;
    private JTextField txtHasil1;
    private JTextField txtHasil2;

    /**
     * Launch the application.
     */
    public static void main(String[] args) {
        EventQueue.invokeLater(new Runnable() {
            public void run() {
                try {
                    OperatorLogika_2511532012 frame = new
OperatorLogika_2511532012();
                    frame.setVisible(true);
                } catch (Exception e) {
                    e.printStackTrace();
                }
            }
        });
    }

    /**
     * Create the frame.
     */
    public OperatorLogika_2511532012() {
        setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        setBounds(100, 100, 450, 300);
        contentPane = new JPanel();
        contentPane.setBorder(new EmptyBorder(5, 5, 5, 5));
        setContentPane(contentPane);
        contentPane.setLayout(null);

        JLabel lblNewLabel = new JLabel("New label");
        lblNewLabel.setBounds(193, 20, 45, 13);
        contentPane.add(lblNewLabel);

        JLabel lblNewLabel_1 = new JLabel("Boolean 1");
        lblNewLabel_1.setBounds(42, 64, 90, 13);
        contentPane.add(lblNewLabel_1);
    }
}
```

```

JLabel lblNewLabel_2 = new JLabel("Boolean 2");
lblNewLabel_2.setBounds(42, 87, 90, 13);
contentPane.add(lblNewLabel_2);

JLabel lblNewLabel_3 = new JLabel("Hasil Konjungsi");
lblNewLabel_3.setBounds(42, 150, 90, 13);
contentPane.add(lblNewLabel_3);

JLabel lblNewLabel_4 = new JLabel("Hasil Disjungsi");
lblNewLabel_4.setBounds(42, 173, 90, 13);
contentPane.add(lblNewLabel_4);

JButton btnNewButton = new JButton("Mulai");
btnNewButton.addActionListener(new ActionListener() {
    public void actionPerformed(ActionEvent e) {
        boolean A1 = Boolean.parseBoolean(txtAngka1.getText());
        boolean A2 = Boolean.parseBoolean(txtAngka2.getText());

        boolean konjungsi = A1 && A2;
        boolean disjungsi = A1 || A2;

        txtHasil1.setText(String.valueOf(konjungsi));
        txtHasil2.setText(String.valueOf(disjungsi));
    }
});
btnNewButton.setBounds(219, 210, 85, 21);
contentPane.add(btnNewButton);

txtAngka1 = new JTextField();
txtAngka1.setBounds(142, 61, 96, 19);
contentPane.add(txtAngka1);
txtAngka1.setColumns(10);


txtAngka2 = new JTextField();
txtAngka2.setBounds(142, 84, 96, 19);
contentPane.add(txtAngka2);
txtAngka2.setColumns(10);

txtHasil1 = new JTextField();
txtHasil1.setEditable(false);
txtHasil1.setBounds(142, 147, 96, 19);
contentPane.add(txtHasil1);
txtHasil1.setColumns(10);

txtHasil2 = new JTextField();
txtHasil2.setEditable(false);
txtHasil2.setBounds(142, 170, 96, 19);
contentPane.add(txtHasil2);
txtHasil2.setColumns(10);
}
}

```

Hasil

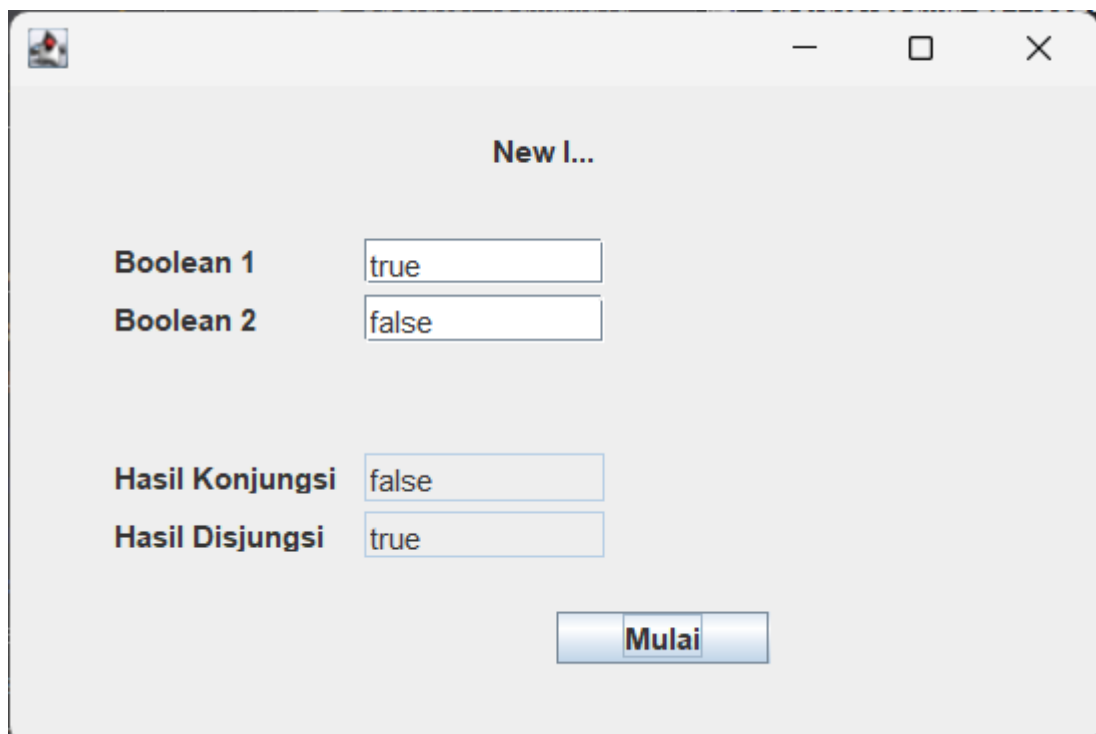

New I...

Boolean 1	true
Boolean 2	false
Hasil Konjungsi	false
Hasil Disjungsi	true