



HTML & CSS

Lecture 4





TABLE OF CONTENT


- ▶ Colors
- ▶ Shadows
- ▶ Radius
- ▶ Fonts





Colors 

Color types

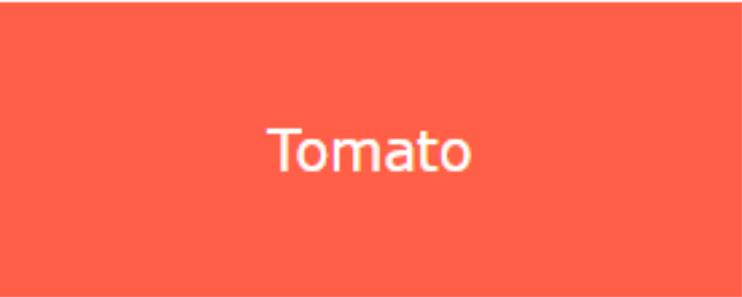

Tomato



Orange



Gray



SlateBlue



DodgerBlue



MediumSeaGreen



Violet




LightGray

HTML colors are specified with predefined color names, or with **RGB**, **HEX**, **HSL**, **RGBA**, or HSLA values.

Most used colors

Most used HTML colors are **RGB**, **HEX** and **color names**.

- **Name Colors**
- **HEX**
- **RGB**
- **RGBA**

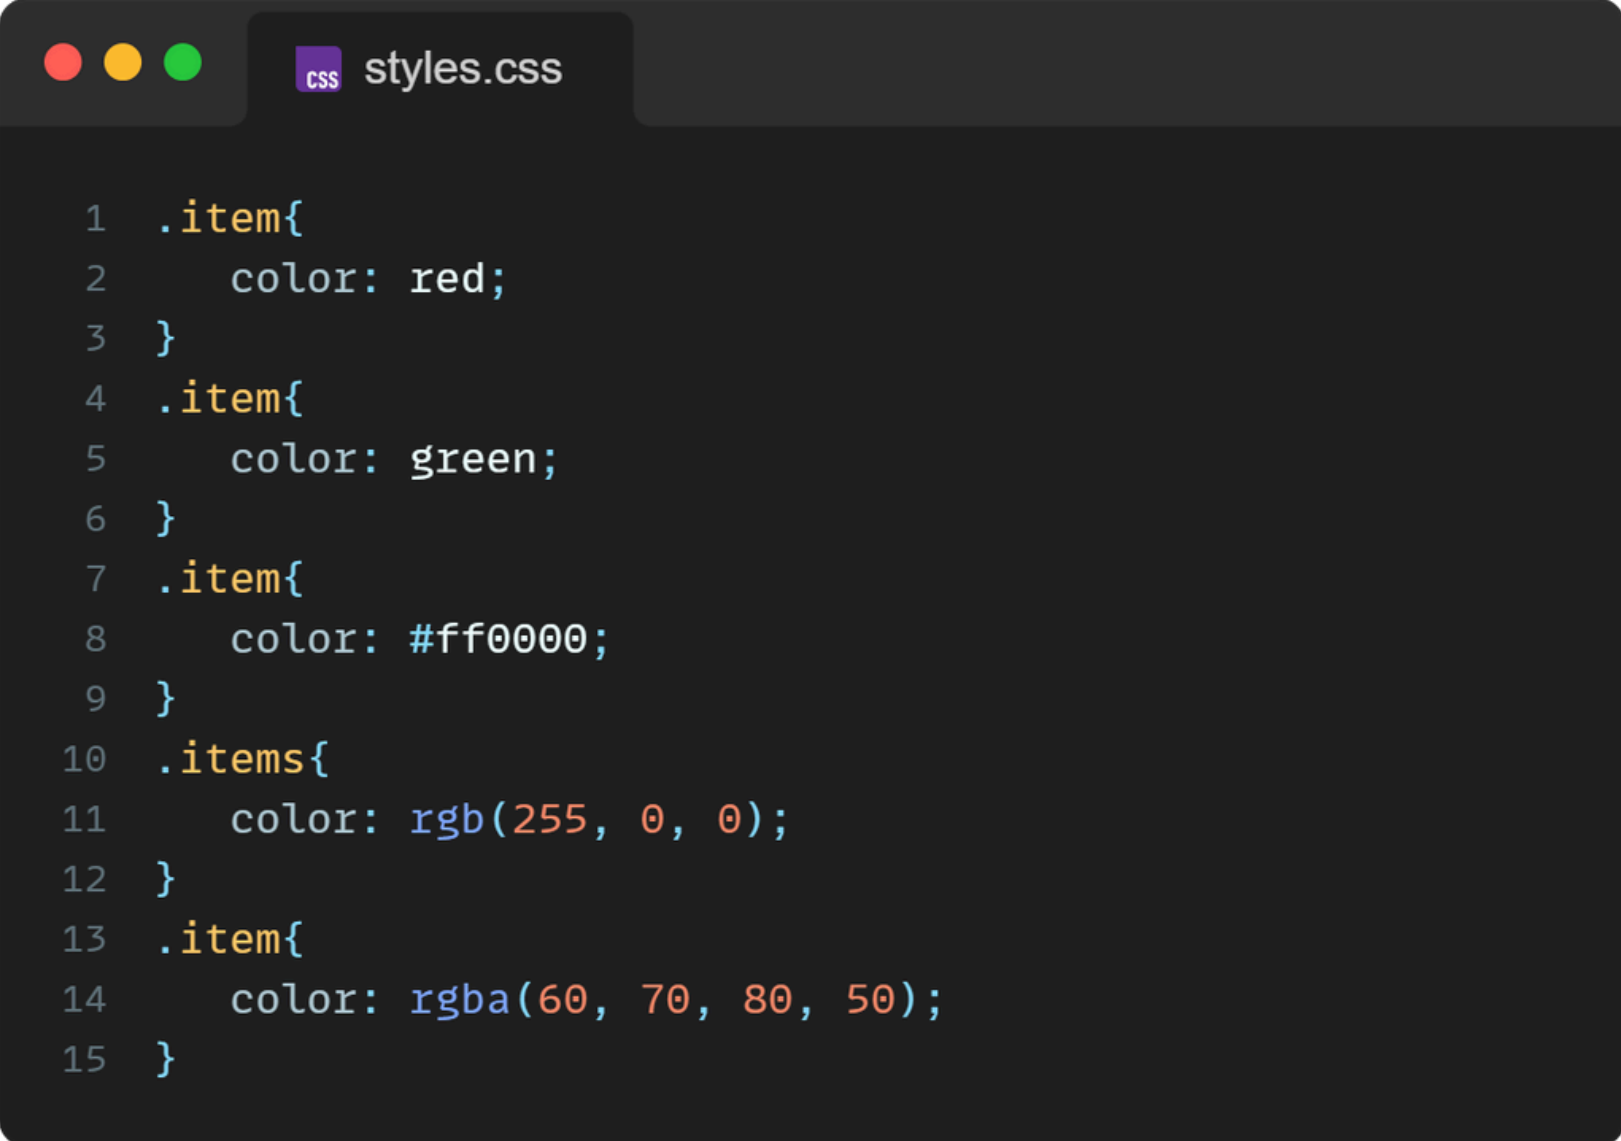

```
1  .item{
2    color: red;
3  }
4  .item{
5    color: green;
6  }
7  .item{
8    color: #ff0000;
9  }
10 .items{
11   color: rgb(255, 0, 0);
12 }
13 .item{
14   color: rgba(60, 70, 80, 50);
15 }
```



Code

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Document</title>
5   <style>
6     .item{
7       width: 200px;
8       height: 100px;
9       margin: 10px;
10    }
11    .item1{
12      background-color: rgb(29, 29, 217);
13    }
14    .item2{
15      background-color: rgba(172, 172, 16, 0.591);
16    }
17    .item3{
18      background-color: #ff0000;
19    }
20  </style>
21 </head>
22 <body>
23   <div class="item item1"></div>
24   <div class="item item2"></div>
25   <div class="item item3"></div>
26 </body>
27 </html>
```



Editor

Result

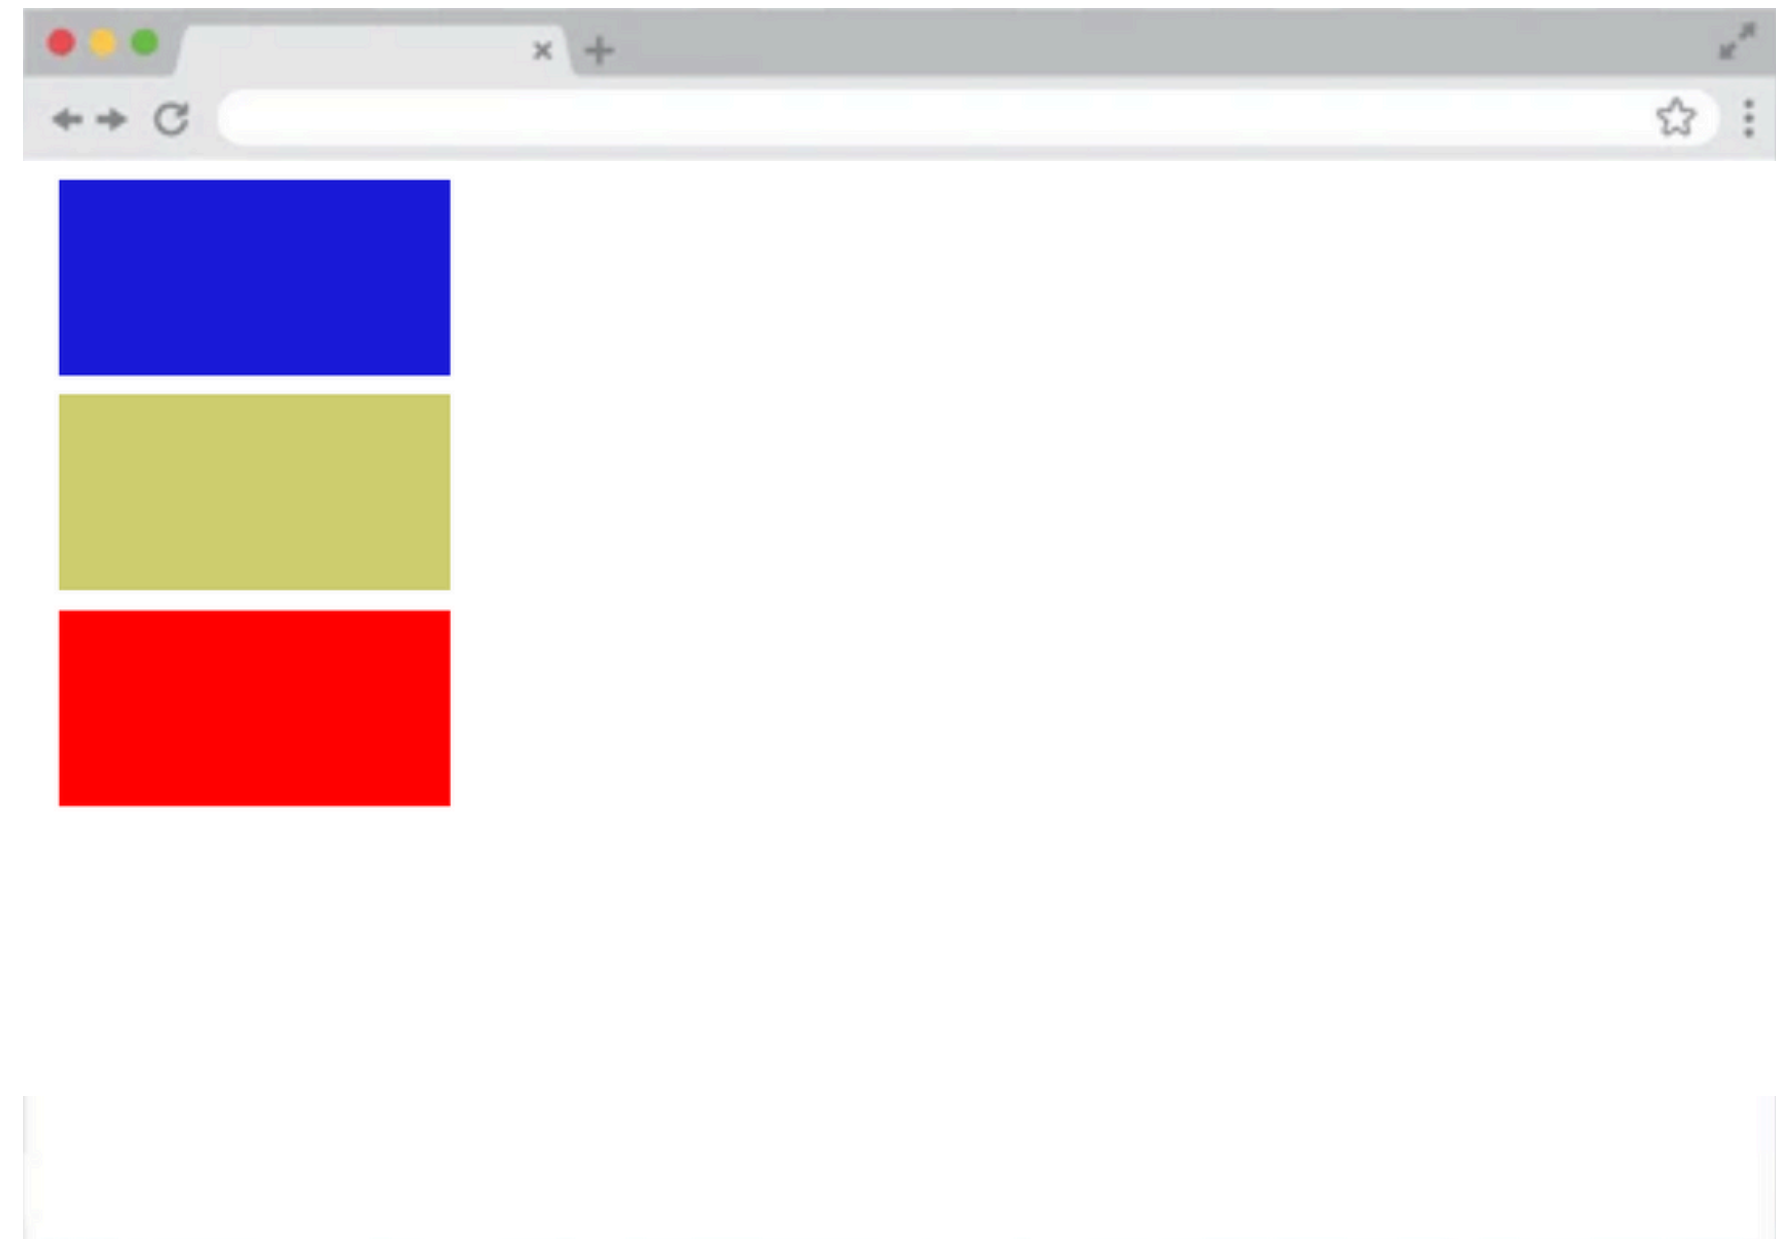

Browser






Shadows



Box-shadow property

The box-shadow property attaches one or more shadows to an element.

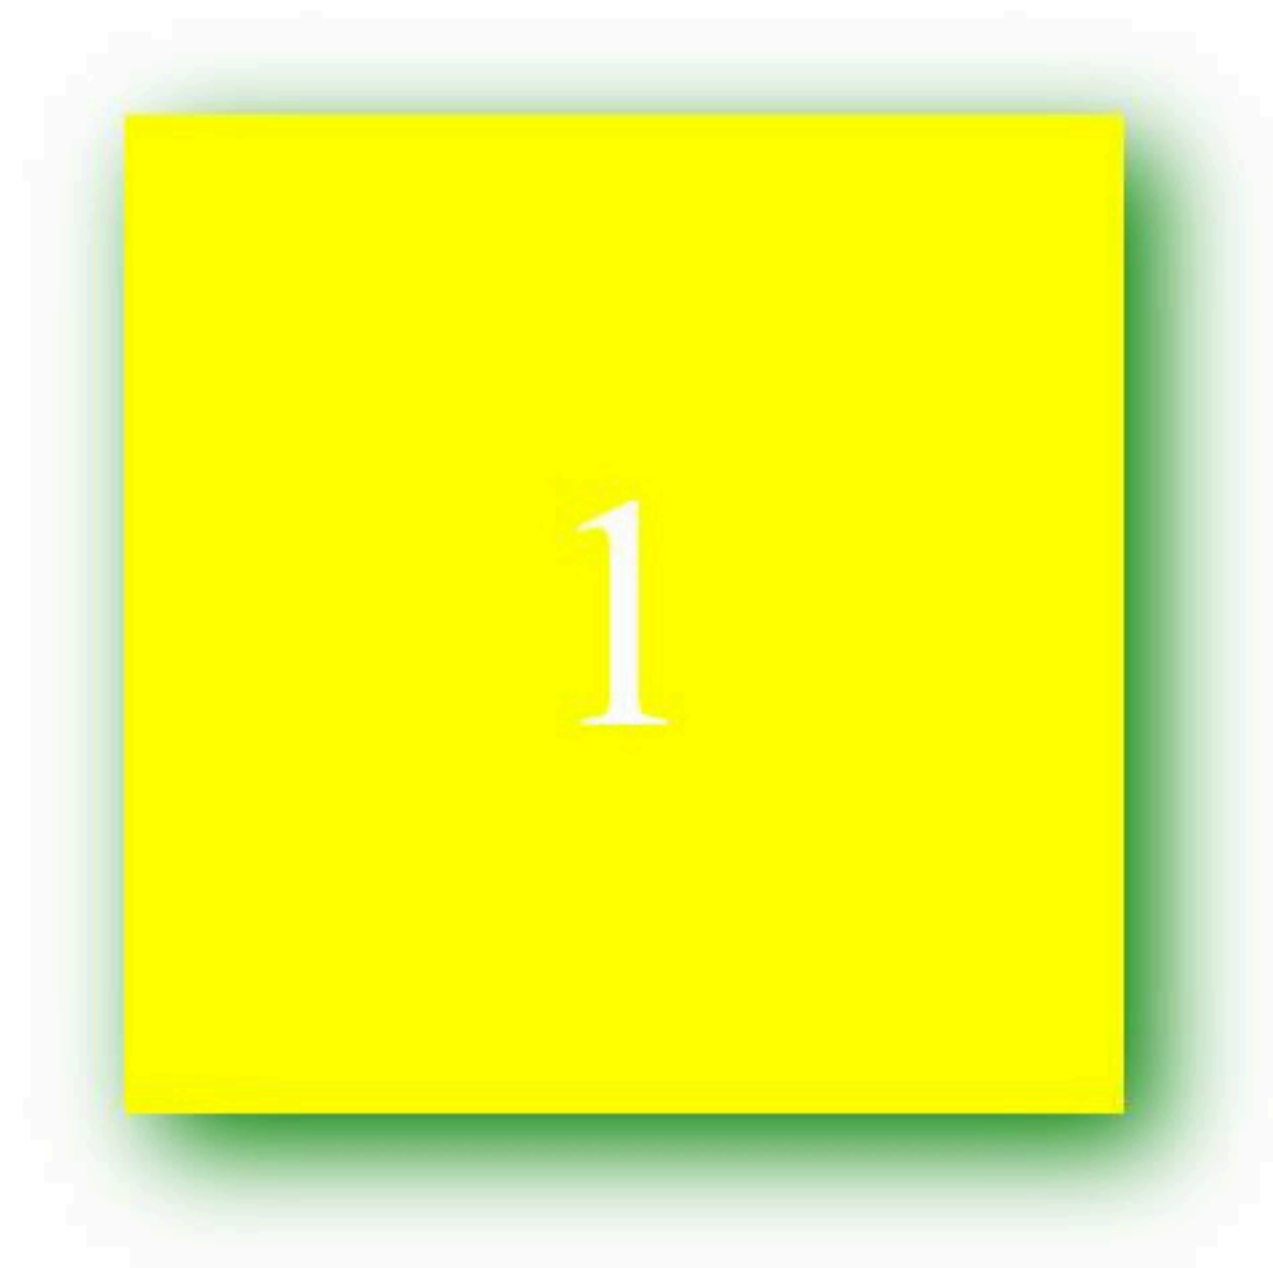

Box-shadow property

A code editor window with a dark background. The title bar shows three colored circles (red, yellow, green) and a tab labeled 'css styles.css'. The code is as follows:

```
1  .box{  
2    box-shadow: 5px 5px 10px black;  
3  }
```

1. First value is for shadow horizontally, it can be negative number.
2. Second value is for vertical shadow, here also can be negative number.
3. Third value is for blurring color,
4. After that we can give shadow color


Code

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Document</title>
5   <style>
6     .item{
7       width: 200px;
8       height: 100px;
9       margin: 10px;
10    }
11    .item1{
12      background-color: rgb(29, 29, 217);
13    }
14    .item2{
15      background-color: rgba(172, 172, 16, 0.591);
16    }
17    .item3{
18      background-color: #ff0000;
19    }
20  </style>
21 </head>
22 <body>
23   <div class="item item1"></div>
24   <div class="item item2"></div>
25   <div class="item item3"></div>
26 </body>
27 </html>
```



Editor

Result

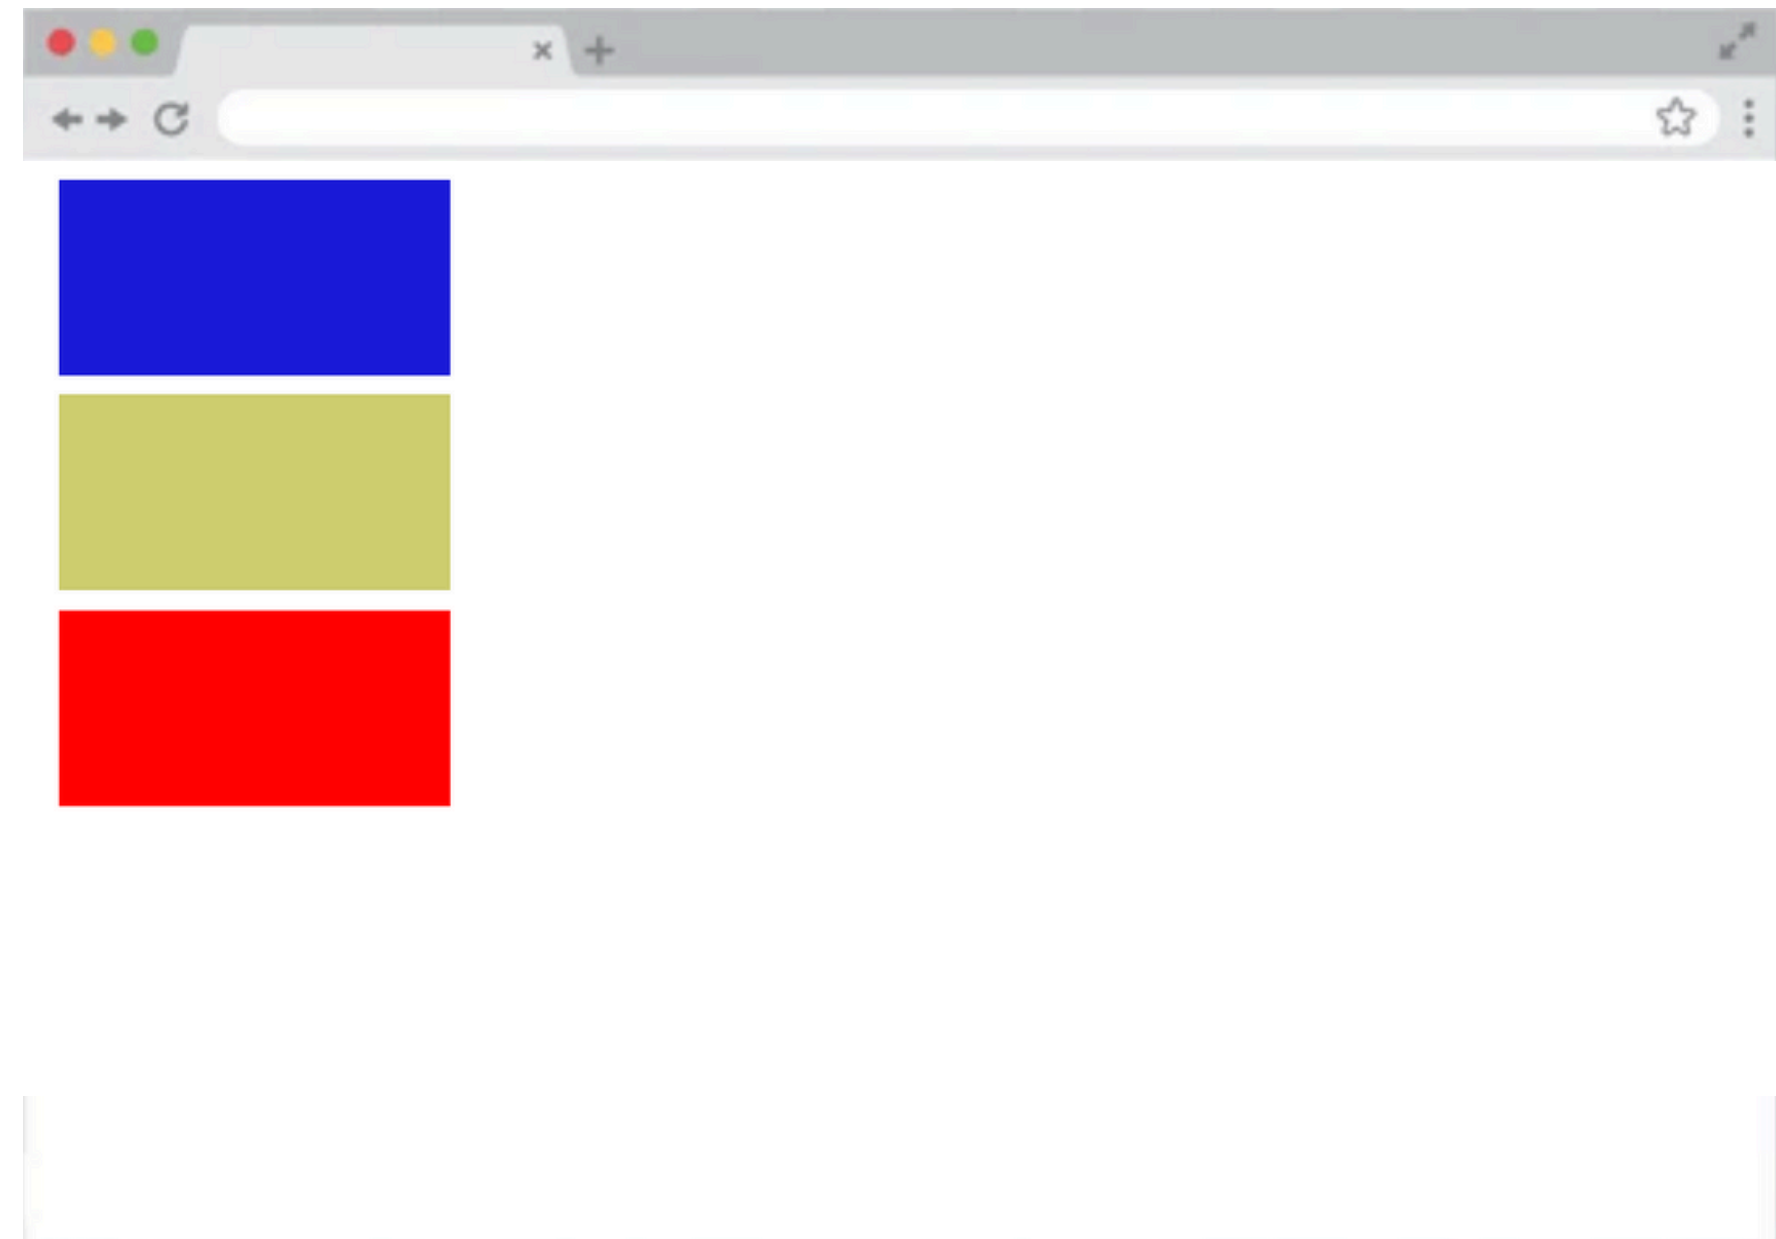


Browser



We can add multiply shadow in one element

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Document</title>
5   <style>
6     .box{
7       width: 200px;
8       height: 150px;
9       border-radius: 10px;
10      border: 3px solid blue;
11      box-shadow: 5px 5px 5px red,
12                  10px 10px 5px white,
13                  15px 15px 5px green;
14    }
15  </style>
16 </head>
17 <body>
18   <div class="box"></div>
19 </body>
20 </html>
```

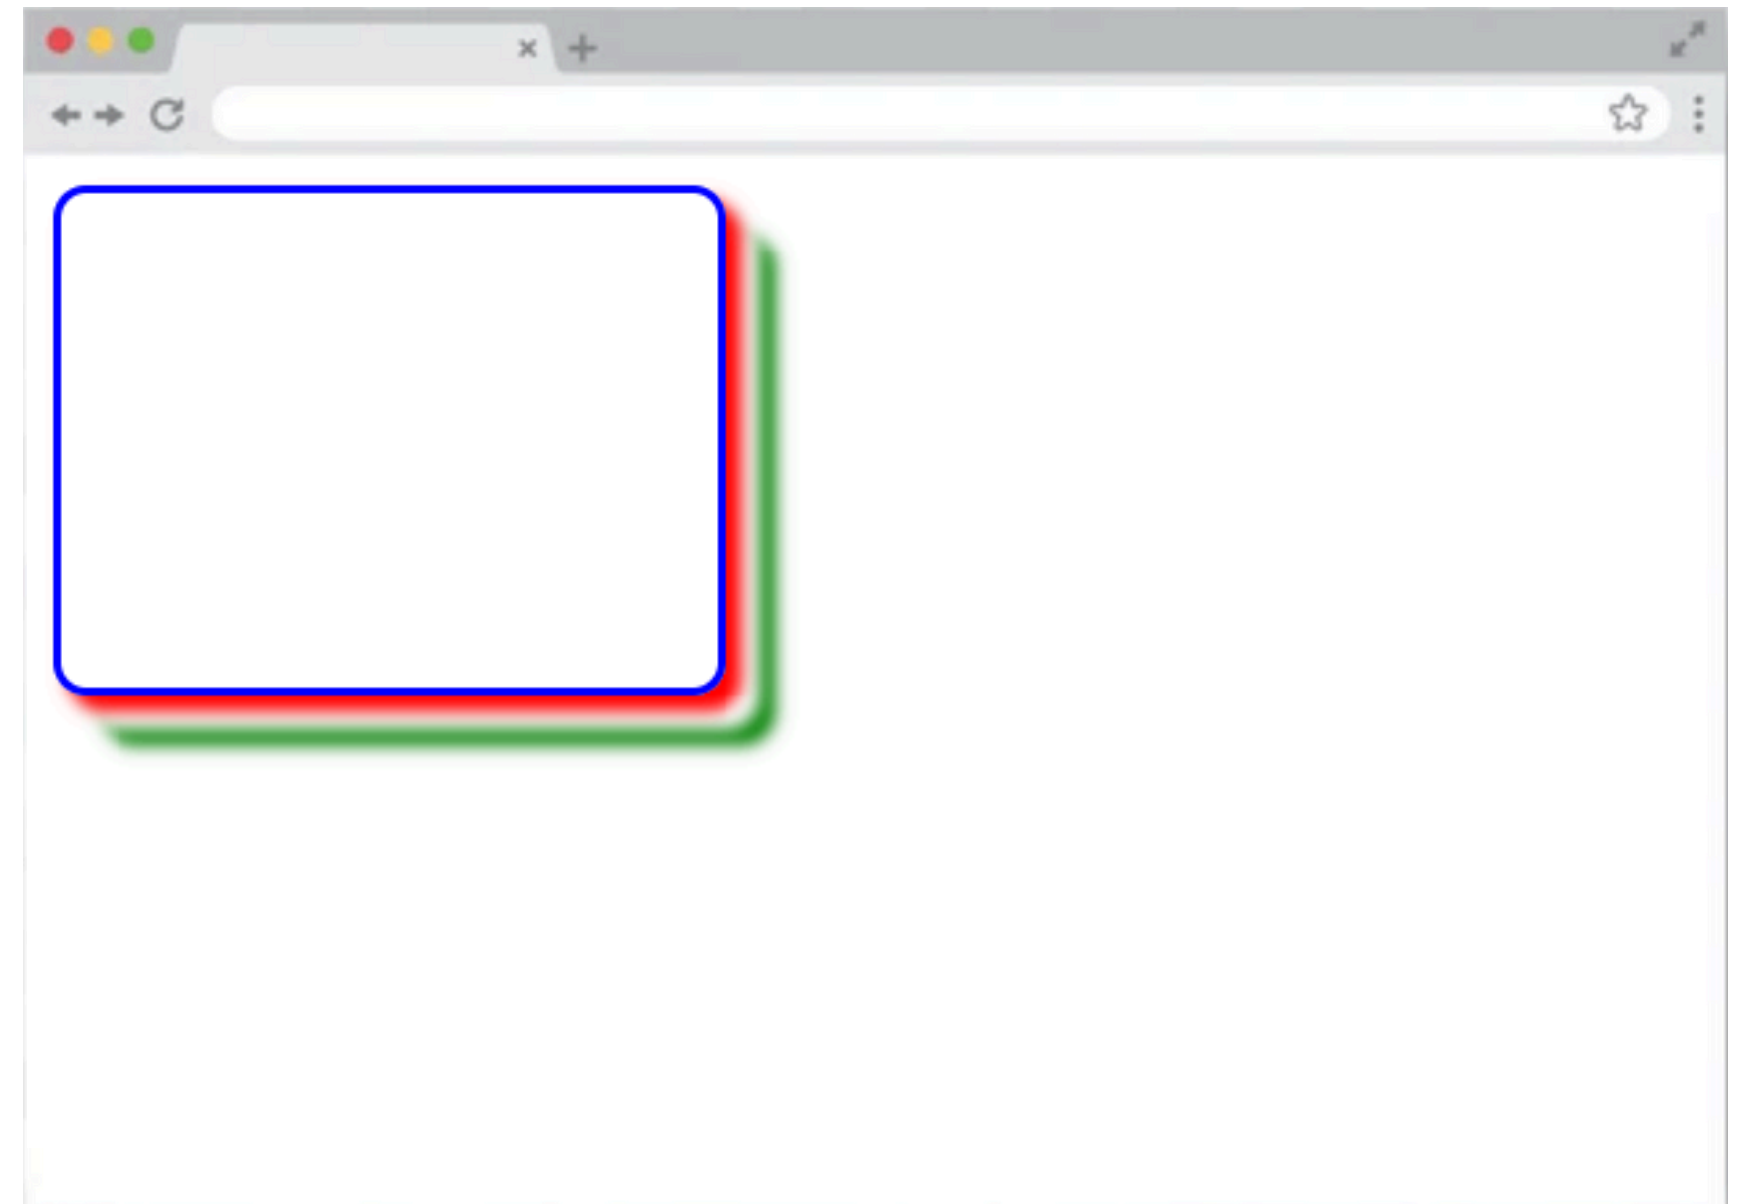

Editor

Browser





Radius

CSS border-radius property



```
1  .box{
2      border: 2px solid red;
3      border-radius: 20px;
4  }
```

The CSS border-radius property is used to set the rounded of an element.


Code

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Document</title>
5   <style>
6     .box{
7       width: 100px;
8       height: 100px;
9       border: 5px solid black;
10      margin: 20px;
11    }
12    .box2{
13      border-radius: 20px;
14    }
15    .box3{
16      border-radius: 50%;
17    }
18  </style>
19 </head>
20 <body>
21   <div class="box box1"></div>
22   <div class="box box2"></div>
23   <div class="box box3"></div>
24 </body>
25 </html>
```



Editor

Result

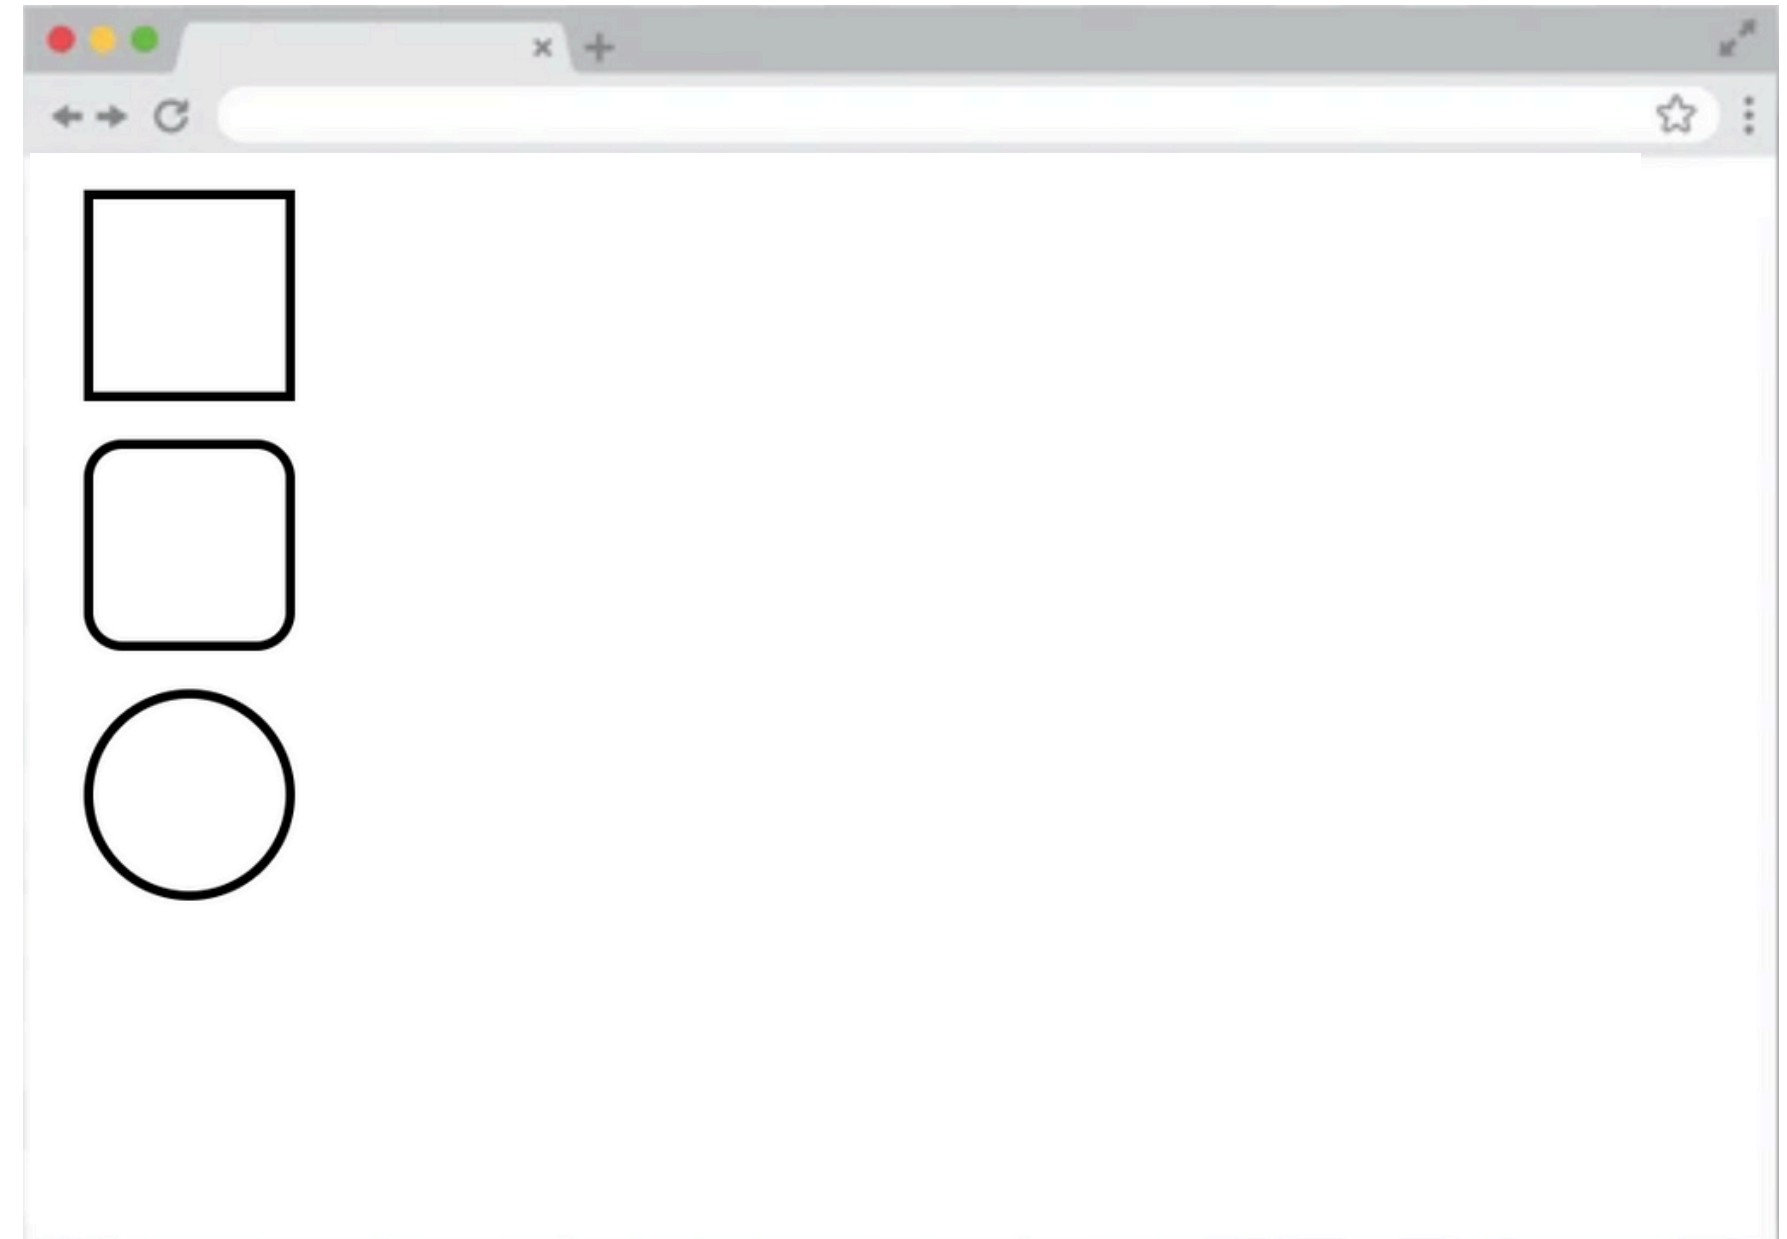

Browser






Fonts

Fonts in HTML

There are there font styles in HTML:

- font-size - is set to make the size of the text
- font-family - is set to style the font of text
- font-weight - is set ot style the weight of text

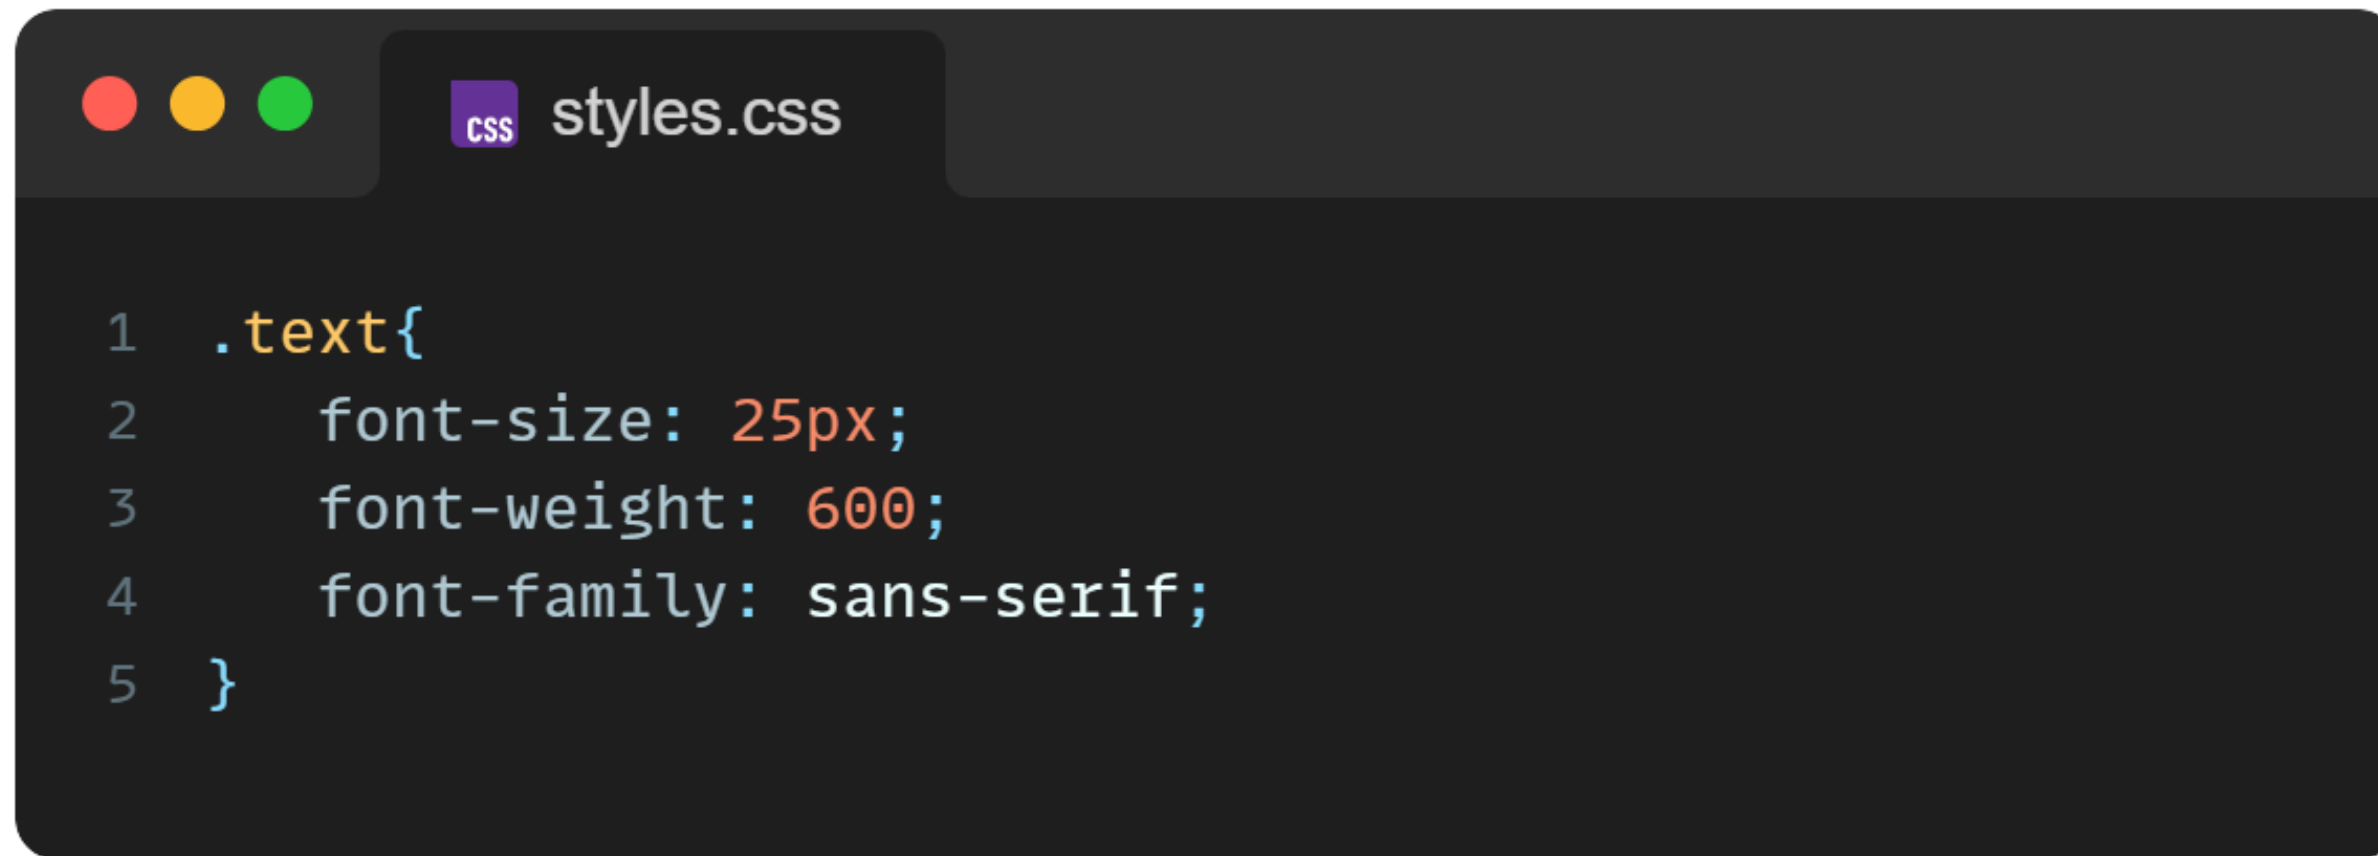A code editor window with a dark background. The title bar shows three colored circles (red, yellow, green) and a tab labeled 'css styles.css'. The code is as follows:

```
1  .text{
2      font-size: 25px;
3      font-weight: 600;
4      font-family: sans-serif;
5  }
```


Code

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Document</title>
5   <style>
6     .text1{
7       font-family: sans-serif;
8       font-weight: 500;
9     }
10    .text2{
11      font-family: 'Courier New', Courier, monospace;
12      font-weight: 700;
13    }
14    .text3{
15      font-family: Cambria, Cochin, Georgia, Times, 'Times New Roman', serif;
16      font-weight: 900;
17    }
18  </style>
19 </head>
20 <body>
21   <h1 class="text1">Hello World</h1>
22   <h1 class="text2">Hello World</h1>
23   <h1 class="text3">Hello World</h1>
24 </body>
25 </html>
```



Editor

Result



Hello World

Hello World

Hello World

Browser



THANK YOU!

“If you cannot do great things,
do small things in a great way”

