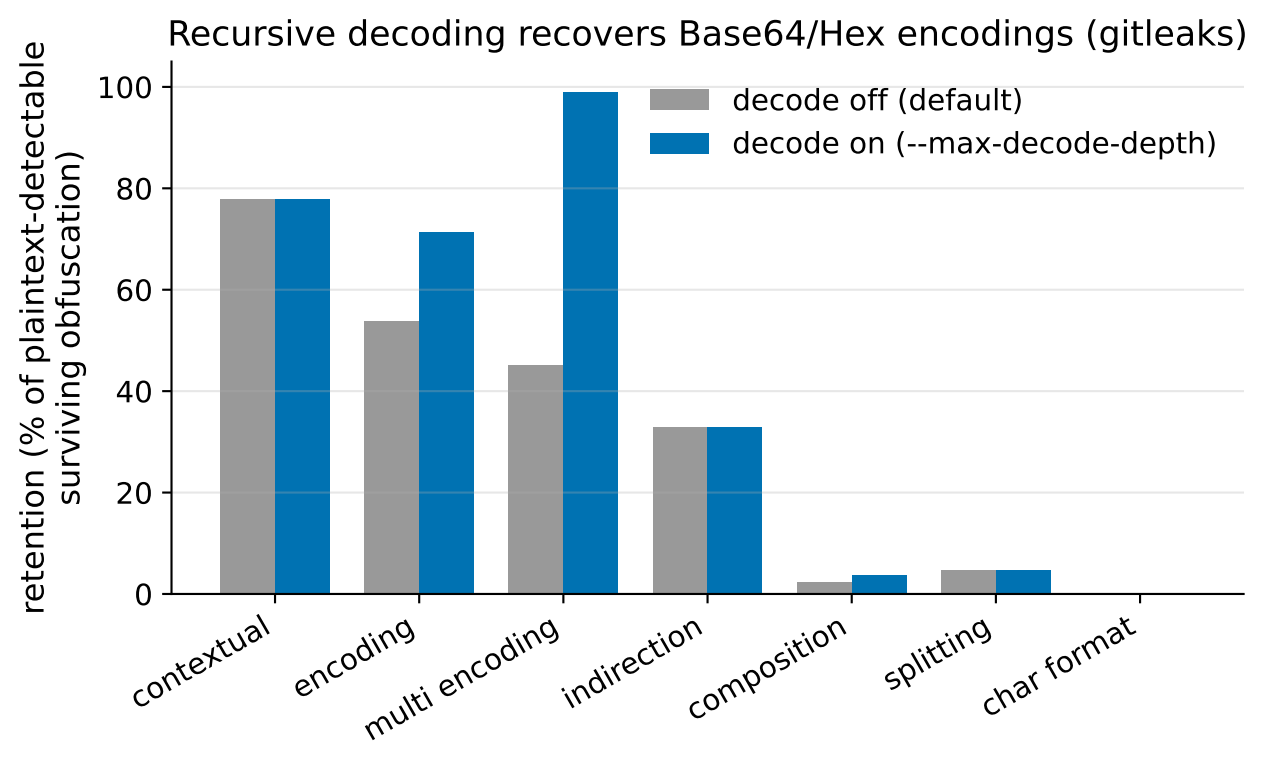
Recursive decoding recovers Base64/Hex encodings (gitleaks)
retention (% of plaintext-detectable surviving obfuscation)
100
80
60
40
20
0
decode off (default)
decode on (--max-decode-depth)
contextual
encoding
multi encoding
indirection
composition
splitting
char format