



Forschungsinstitut

umati Transformation Engine - API documentation

(Release Candidate, 2021-10-14)

| | |
|---|-----------|
| 1 Introduction | 1 |
| 1.1 Recommended Reading | 1 |
| 2 Initialization of a data client plugin | 3 |
| 3 Known issues | 5 |
| 3.1 API definition issues | 5 |
| 3.2 Documentation/Style issues | 5 |
| 4 Todo List | 7 |
| 5 Module Index | 9 |
| 5.1 Modules | 9 |
| 6 Data Structure Index | 11 |
| 6.1 Data Structures | 11 |
| 7 File Index | 13 |
| 7.1 File List | 13 |
| 8 Module Documentation | 15 |
| 8.1 Transformation Engine | 15 |
| 8.1.1 Detailed Description | 15 |
| 8.2 Data Client | 15 |
| 8.2.1 Detailed Description | 16 |
| 8.2.2 Data Structure Documentation | 16 |
| 8.2.2.1 struct tek_sa_data_client_capabilities | 16 |
| 8.2.3 Typedef Documentation | 17 |
| 8.2.3.1 tek_sa_data_client_handle | 17 |
| 8.2.3.2 tek_sa_load_plugin_fn | 17 |
| 8.2.4 Enumeration Type Documentation | 17 |
| 8.2.4.1 tek_sa_threading_model | 17 |
| 8.3 Common Definitions | 18 |
| 8.3.1 Detailed Description | 21 |
| 8.3.2 Data Structure Documentation | 21 |
| 8.3.2.1 struct tek_sa_additional_file | 21 |
| 8.3.2.2 struct tek_sa_data_client_configuration | 21 |
| 8.3.2.3 struct tek_sa_configuration | 21 |
| 8.3.2.4 struct tek_sa_guid | 22 |
| 8.3.2.5 struct tek_sa_byte_string | 22 |
| 8.3.2.6 struct tek_sa_string | 22 |
| 8.3.2.7 struct tek_sa_complex_data | 23 |
| 8.3.2.8 struct tek_sa_complex_data_array_item | 23 |
| 8.3.2.9 struct tek_sa_complex_data_array | 23 |
| 8.3.2.10 struct tek_sa_complex_data_matrix | 24 |

| | |
|---|----|
| 8.3.2.11 struct tek_sa_variant_array | 24 |
| 8.3.2.12 struct tek_sa_variant_matrix | 25 |
| 8.3.2.13 struct tek_sa_variant | 25 |
| 8.3.2.14 struct tek_sa_struct_field_type_definition | 25 |
| 8.3.2.15 struct tek_sa_struct_definition | 26 |
| 8.3.2.16 struct tek_sa_enum_item_definition | 26 |
| 8.3.2.17 struct tek_sa_enum_definition | 26 |
| 8.3.2.18 struct tek_sa_method_argument_description | 26 |
| 8.3.2.19 struct tek_sa_field_write_request | 27 |
| 8.3.2.20 struct tek_sa_write_result | 27 |
| 8.3.2.21 struct tek_sa_read_result | 27 |
| 8.3.2.22 struct tek_sa_event_parameter | 27 |
| 8.3.2.23 struct tek_sa_dc_event | 28 |
| 8.3.2.24 union tek_sa_variant_array.data | 29 |
| 8.3.2.25 union tek_sa_variant.data | 29 |
| 8.3.3 Macro Definition Documentation | 30 |
| 8.3.3.1 TEK_SA_ERR_SUCCESS | 30 |
| 8.3.3.2 TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE | 30 |
| 8.3.3.3 TEK_SA_ERR_OUT_OF_MEMORY | 30 |
| 8.3.3.4 TEK_SA_ERR_INVALID_PARAMETER | 30 |
| 8.3.3.5 TEK_SA_ERR_RETRY_LATER | 31 |
| 8.3.3.6 TEK_SA_READ_RESULT_STATUS_OK | 31 |
| 8.3.3.7 TEK_SA_READ_RESULT_STATUS_NOK | 31 |
| 8.3.3.8 TEK_SA_READ_RESULT_STATUS_TIMEOUT | 31 |
| 8.3.3.9 TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE | 31 |
| 8.3.3.10 TEK_SA_BLOCK_TRANSFER_END_OF_FILE | 32 |
| 8.3.3.11 TEK_SA_BLOCK_TRANSFER_ABORT | 32 |
| 8.3.3.12 TEK_SA_ERR_UNSPECIFIED | 32 |
| 8.3.4 Typedef Documentation | 32 |
| 8.3.4.1 tek_sa_type_handle | 32 |
| 8.3.4.2 tek_sa_type_handle_or_type_enum | 33 |
| 8.3.4.3 tek_sa_datetime | 33 |
| 8.3.4.4 tek_sa_field_value | 33 |
| 8.3.4.5 tek_sa_field_handle | 33 |
| 8.3.4.6 tek_sa_event_handle | 33 |
| 8.3.4.7 tek_sa_alarm_handle | 34 |
| 8.3.4.8 tek_sa_method_handle | 34 |
| 8.3.4.9 TEK_SA_RESULT | 34 |
| 8.3.5 Enumeration Type Documentation | 34 |
| 8.3.5.1 tek_sa_variant_type | 34 |
| 8.3.5.2 tek_sa_field_attributes | 35 |
| 8.3.5.3 tek_sa_log_level_t | 35 |

| | |
|---|-----------|
| 9 Data Structure Documentation | 37 |
| 9.1 tek_sa_data_client Struct Reference | 37 |
| 9.1.1 Detailed Description | 38 |
| 9.1.2 Field Documentation | 38 |
| 9.1.2.1 register_features | 38 |
| 9.1.2.2 connect | 38 |
| 9.1.2.3 free | 39 |
| 9.1.2.4 read_fields | 39 |
| 9.1.2.5 write_fields | 41 |
| 9.1.2.6 block_read | 41 |
| 9.1.2.7 block_write | 42 |
| 9.1.2.8 subscribe | 42 |
| 9.1.2.9 unsubscribe | 43 |
| 9.1.2.10 invoke | 43 |
| 9.1.2.11 acknowledge_alarm | 44 |
| 9.1.2.12 handle | 44 |
| 9.2 tek_sa_data_client_plugin Struct Reference | 44 |
| 9.2.1 Detailed Description | 45 |
| 9.2.2 Field Documentation | 45 |
| 9.2.2.1 plugin_context | 45 |
| 9.2.2.2 data_client_new | 45 |
| 9.2.2.3 free_context | 46 |
| 9.3 tek_sa_transformation_engine Struct Reference | 46 |
| 9.3.1 Detailed Description | 47 |
| 9.3.2 Field Documentation | 48 |
| 9.3.2.1 register_field | 48 |
| 9.3.2.2 register_method | 48 |
| 9.3.2.3 register_event | 49 |
| 9.3.2.4 register_alarm | 49 |
| 9.3.2.5 register_enum_type | 50 |
| 9.3.2.6 register_struct_type | 50 |
| 9.3.2.7 post_event | 51 |
| 9.3.2.8 set_alarm | 51 |
| 9.3.2.9 reset_alarm | 51 |
| 9.3.2.10 log | 52 |
| 9.3.2.11 get_global_event | 52 |
| 9.3.2.12 update_capabilities | 53 |
| 9.3.2.13 read_progress | 53 |
| 9.3.2.14 read_result | 54 |
| 9.3.2.15 notify_change | 54 |
| 9.3.2.16 write_result | 55 |
| 9.3.2.17 call_method_result | 55 |

| | |
|---|-----------|
| 9.3.2.18 block_read_data | 55 |
| 9.3.2.19 block_write_data | 56 |
| 9.3.2.20 block_write_result | 56 |
| 10 File Documentation | 59 |
| 10.1 include/south_api.h File Reference | 59 |
| 10.1.1 Detailed Description | 62 |
| 10.1.2 Macro Definition Documentation | 62 |
| 10.1.2.1 TEK_SA_API_VERSION_MAJOR | 63 |
| 10.1.2.2 TEK_SA_API_VERSION_MINOR | 63 |
| 10.1.2.3 TEK_SA_API_VERSION_PATCH | 63 |
| 10.1.2.4 TEK_SA_API_VERSION | 63 |
| 10.2 south_api.h | 63 |
| Index | 73 |

Chapter 1

Introduction

The [VDW-Forschungsinstitut e.V.](#) is currently working with partners and its members to create a specification of a TransformationEngine.

This documentation describes the interface between the umati Transformation Engine and its Data Clients.

Application Warning Notice

This DRAFT with date of issue 2021-10-01 is being submitted to the public for review and comment. Because the final API Specification may differ from this version, the application of this draft is subject to special agreement.

Comments are requested:

- preferably as a file by e-mail to g.goerisch@vdw.de
- or in paper form to VDW-Forschungsinstitut e.V., Lyoner Straße 18, 60528 Frankfurt

1.1 Recommended Reading

- Start with [Initialization of a data client plugin](#) to get an overview of the relation between transformation engine, shared library, data_client_plugin and data_client.
- Continue with the sections [Transformation Engine](#) and [Data Client](#) which contain the main components of the interface, namely [tek_sa_transformation_engine](#) and [tek_sa_data_client](#).

Chapter 2

Initialization of a data client plugin

Each data client shared library represents one plugin. One plugin may be responsible for multiple data client instances of (possibly) different type. Which type of data client is to be created is defined in the configuration. This configuration is passed to a call to [tek_sa_data_client_plugin::data_client_new](#).


After loading the shared library the TEK calls the main initialization function with the fixed name `load_plugin` and a signature of [tek_sa_load_plugin_fn](#) . This function creates a new singleton instance of [tek_sa_data_client_plugin](#) and is expected to save the given TEK api struct.

Using the created [tek_sa_data_client_plugin](#), the TEK calls its [tek_sa_data_client_plugin::data_client_new](#) method for each configuration.

Each data client then is initialized with calls to [tek_sa_data_client::register_features](#) and [tek_sa_data_client::connect](#).

[tek_sa_data_client::register_features](#) should do all registration tasks which are possible without a connection to the hardware.

[tek_sa_data_client::connect](#) should connect to the hardware and register all new fields, types etc. Additionally it may happen that the capabilities of the data client change after connecting because more information about the hardware are known. Therefore it is expected that a call to [tek_sa_transformation_engine::update_capabilities](#) will happen.

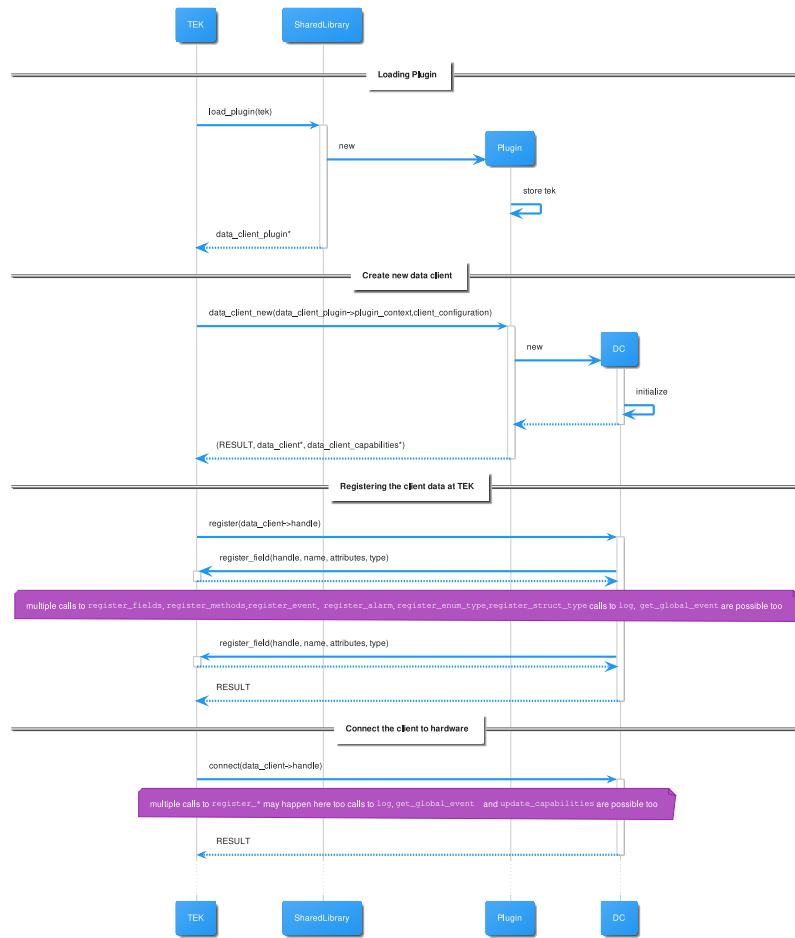

Chapter 3

Known issues

3.1 API definition issues

This sections contains a list of yet unresolved issues concerning the definition of the API which do not relate directly to specific structs or functions.

Todo [D] A possibility to unregister fields, methods, events etc. is needed.

Todo [D] A possibility to define the sampling interval of subscribed fields is needed.

Todo [D, TEAM] We need a mechanism to transfer metadata from the controller/DC to the TEK see Teams/↔
Allgemein 15.9.2021

3.2 Documentation/Style issues

Todo [C, MIG] mkdocs/doxybook2 output can not handle union

Todo [C, MIG] mkdocs/doxybook2 output can not handle typedefs

Todo [C, MIG] mkdocs/doxybook2 output can not handle function pointers

Chapter 4

Todo List

Page **Known issues**

[D] A possibility to unregister fields, methods, events etc. is needed.

[D] A possibility to define the sampling interval of subscribed fields is needed.

[D, TEAM] We need a mechanism to transfer metadata from the controller/DC to the TEK see Teams/Allgemein 15.9.2021

[C, MIG] mkdocs/doxybook2 output can not handle union

[C, MIG] mkdocs/doxybook2 output can not handle typedefs

[C, MIG] mkdocs/doxybook2 output can not handle function pointers

Global **tek_sa_data_client::read_fields**)(tek_sa_data_client_handle dc, uint64_t request_id, const tek_sa_↵
_field_handle items_to_read[], uint32_t number_of_items, bool do_not_block)

[B, TEAM] define error values of read function

Global **tek_sa_data_client::subscribe**)(tek_sa_data_client_handle dc, const tek_sa_field_handle items_↵
to_subscribe[], uint32_t number_of_items)

[D, TEAM] add sampling rate parameter

Global **tek_sa_data_client::write_fields**)(tek_sa_data_client_handle dc, uint64_t request_id, const struct
tek_sa_field_write_request items_to_write[], uint32_t number_of_items, bool do_not_block)

[B, TEAM] should the data client call a progress function if the operation needs more time?

Global **tek_sa_dc_event::event_type**

[A] Depending on the decision about the concept of invalid handles, this has to be removed.

Global **tek_sa_dc_event::source**

[A] At this point the concept of invalid handle is used but that concept was dropped

Global **tek_sa_transformation_engine::get_global_event**)(const char *name)

[C, TEAM] define the predefined events

[C, TEAM] define return value when event with given name does not exist?

Global **tek_sa_transformation_engine::read_progress**)(tek_sa_data_client_handle dc, uint64_t request_id,
uint64_t progress)

[B, TEAM] when should a data client report progress?

[B, TEAM] when can the TEK stop the client (after progress was not reported)?

Global **tek_sa_transformation_engine::set_alarm**)(tek_sa_data_client_handle dc, const tek_sa_alarm_↵
handle alarm)

[C, TEAM] called by data_client after connect, regardless of "acknowledge" calls during previous connection?

Chapter 5

Module Index

5.1 Modules

Here is a list of all modules:

| | |
|---------------------------------|----|
| Transformation Engine | 15 |
| Data Client | 15 |
| Common Definitions | 18 |

Chapter 6

Data Structure Index

6.1 Data Structures

Here are the data structures with brief descriptions:

| | |
|--|----|
| tek_sa_data_client | |
| The interface of one instance of a data client | 37 |
| tek_sa_data_client_plugin | |
| Interface of the data client plugin | 44 |
| tek_sa_transformation_engine | |
| Interface of the Transformation Engine | 46 |

Chapter 7

File Index

7.1 File List

Here is a list of all files with brief descriptions:

| | |
|--------------------------------------|--|
| include/ south_api.h | Definition of the interface between Data Clients (DC) and the Transformation Engine (TEK) . . . 59 |
|--------------------------------------|--|

Chapter 8

Module Documentation

8.1 Transformation Engine

Data Structures

- struct [tek_sa_transformation_engine](#)
Interface of the Transformation Engine.

8.1.1 Detailed Description

The module **Transformation Engine** contains the main API the transformation engine provides to data clients.

A client can interact the Transformation Engine API by accessing the *api* pointer which is given to the `load_plugin` function. (see the [tek_sa_load_plugin_fn](#) description)

Structs and definitions which are used in both the transformation engine and the data client API are described in the section [Common Definitions](#) .

8.2 Data Client

Data Structures

- struct [tek_sa_data_client_capabilities](#)
capabilities of the data client. These capabilities are applied to the complete data client as well as to each instance (device connection). [More...](#)
- struct [tek_sa_data_client](#)
The interface of one instance of a data client.
- struct [tek_sa_data_client_plugin](#)
Interface of the data client plugin.

Typedefs

- typedef void * [tek_sa_data_client_handle](#)
The type of the data client handle.
- typedef [TEK_SA_RESULT](#)(* [tek_sa_load_plugin_fn](#)) (struct [tek_sa_transformation_engine](#) *api, const struct [tek_sa_data_client_configuration](#) *plugin_configuration, struct [tek_sa_data_client_plugin](#) *plugin, struct [tek_sa_configuration](#) *tek_configuration)
Signature for the load plugin function.

Enumerations

- enum [tek_sa_threading_model](#) { [TEK_SA_THREADING_MODEL_SAME_THREAD](#) = 0x0 , [TEK_SA_THREADING_MODEL_SAME_THREAD](#) = 0x1 , [TEK_SA_THREADING_MODEL_PARALLEL](#) = 0x2 }
- Describes the threading model of a data client instance of a data client plugin.

8.2.1 Detailed Description

The module **Data Client** contains the API a data client has to implement. Optional parts of the interface are marked accordingly.

Structs and definitions which are used in both the transformation engine and the data client API are described in the section [Common Definitions](#) .

8.2.2 Data Structure Documentation

8.2.2.1 struct [tek_sa_data_client_capabilities](#)

capabilities of the data client. These capabilities are applied to the complete data client as well as to each instance (device connection).

Remarks

As these capabilities are extended in the specification process it may be necessary to split the capabilities of the data client and the instance into different structs.

Definition at line 1031 of file [south_api.h](#).

Data Fields

| | | |
|---|--|---|
| uint32_t | number_of_inflight_calls | <p>Number of uncompleted async api calls. Unlimited number of uncompleted calls are signaled using 0 A blocking client uses 1 to signal that the TEK must wait for each result before requesting the next operation.</p> <p>Remarks</p> <p>This information may be dependent on the physical device and therefore available only after the connection was established.</p> |
| enum tek_sa_threading_model | threading_model | <p>Requirements for the thread calling any communication function in the data client API.</p> |

8.2.3 Typedef Documentation

8.2.3.1 tek_sa_data_client_handle

```
typedef void* tek_sa_data_client_handle
```

The type of the data client handle.

An opaque handle for data client plugins. Internal structure of the data_client implementation of a specific plugin is hidden behind this pointer.

Definition at line 235 of file [south_api.h](#).

8.2.3.2 tek_sa_load_plugin_fn

```
typedef TEK_SA_RESULT(* tek_sa_load_plugin_fn) (struct tek_sa_transformation_engine *api, const
struct tek_sa_data_client_configuration *plugin_configuration, struct tek_sa_data_client_plugin
*plugin, struct tek_sa_configuration *tek_configuration)
```

Signature for the load plugin function.

The shared library of the data client will export the function 'load_plugin' that fills a struct data_client_plugin.

Parameters

| | |
|-----------------------------|--|
| <i>api</i> | The TEK api. |
| <i>plugin_configuration</i> | Additional configuration files, e.g. licensing information, for the plugin itself. |
| <i>plugin</i> | The result of the initialized plugin. |
| <i>tek_configuration</i> | global configuration of properties used for data_clients |

Returns

Success or failure code.

Definition at line 1846 of file [south_api.h](#).

8.2.4 Enumeration Type Documentation

8.2.4.1 tek_sa_threading_model

```
enum tek_sa_threading_model
```

Describes the threading model of a data client instance of a data client plugin.

Enumerator

| | |
|------------------------------------|---|
| TEK_SA_THREADING_MODEL_SAME_THREAD | The same thread must always be used to call the data client instance. |
| TEK_SA_THREADING_MODEL_SEQUENTIAL | Only one thread of a thread pool is doing a single call at a time at the data client instance. |
| TEK_SA_THREADING_MODEL_PARALLEL | DLL is thread safe, multiple parallel calls are allowed. Remarks If the number of parallel tasks in the data client is reached, the API call may return ASYNC_RESULT_RETRY_LATER. |

Definition at line 1001 of file [south_api.h](#).

8.3 Common Definitions

Data Structures

- struct [tek_sa_additional_file](#)
Configuration class which describes an additional file which is passed to the data client. [More...](#)
- struct [tek_sa_data_client_configuration](#)
Configuration object containing the contents of the configuration files for the [tek_sa_data_client_plugin](#) or [tek_sa_data_client](#) instances. [More...](#)
- struct [tek_sa_configuration](#)
Configuration struct that contains generic properties and settings for TEK instance. [More...](#)
- struct [tek_sa_guid](#)
The representation of a GUID when used as a field type. [More...](#)
- struct [tek_sa_byte_string](#)
The representation of a byte array with variable length when used as a field type. [More...](#)
- struct [tek_sa_string](#)
The representation of a string with variable length when used as a field type. [More...](#)
- struct [tek_sa_complex_data](#)
The representation of a field value which has a type which is not a predefined type. [More...](#)
- struct [tek_sa_complex_data_array_item](#)
The representation of the items of an array of complex data values with exactly one dimension. [More...](#)
- struct [tek_sa_complex_data_array](#)
The representation of an array of complex data with exactly one dimension. [More...](#)
- struct [tek_sa_complex_data_matrix](#)
The representation of array of complex data with more than one dimension. [More...](#)
- struct [tek_sa_variant_array](#)
The representation of a one dimensional array of the supported base types. [More...](#)
- struct [tek_sa_variant_matrix](#)
The representation of an array with more than one dimension of the supported base types. [More...](#)
- struct [tek_sa_variant](#)
The representation of a single value (which may be of array type too). [More...](#)
- struct [tek_sa_struct_field_type_definition](#)
The type definition of a record field in a user defined struct type. [More...](#)
- struct [tek_sa_struct_definition](#)

- The type definition of a user defined record type. [More...](#)*

 - struct [tek_sa_enum_item_definition](#)
- The definition of an enum item which is defined in a user defined enum type. [More...](#)*

 - struct [tek_sa_enum_definition](#)
- The type definition of a user defined enum type. [More...](#)*

 - struct [tek_sa_method_argument_description](#)
- The description of a method parameter. [More...](#)*

 - struct [tek_sa_field_write_request](#)
- Structure to encapsulate the parameters of a write field request. [More...](#)*

 - struct [tek_sa_write_result](#)
- Structure to encapsulate the result of a write field request. [More...](#)*

 - struct [tek_sa_read_result](#)
- Structure to encapsulate the result of a read operation of a single field. [More...](#)*

 - struct [tek_sa_event_parameter](#)
- Structure to encapsulate an event parameter. [More...](#)*

 - struct [tek_sa_dc_event](#)
- An event which may be sent from the data client to [tek_sa_transformation_engine::post_event](#). [More...](#)*

 - union [tek_sa_variant_array.data](#)
- The array values. [More...](#)*

 - union [tek_sa_variant.data](#)
- The value. [More...](#)*

Macros

- #define [TEK_SA_ERR_UNSPECIFIED](#) 1000
unspecified error to be used when no more specific error is available.

Typedefs

- typedef int64_t [tek_sa_type_handle](#)
The type of a handle which is returned for user defined types.
- typedef int64_t [tek_sa_type_handle_or_type_enum](#)
The type for a reference handle which references either a user defined type (see [tek_sa_type_handle](#)) or a predefined type (See [tek_sa_variant_type](#).)
- typedef int64_t [tek_sa_datetime](#)
The type of date and time values wen used as a field type.
- typedef struct [tek_sa_variant tek_sa_field_value](#)
Type of data client field values.
- typedef uint32_t [tek_sa_field_handle](#)
Handle type for a field definition.
- typedef uint32_t [tek_sa_event_handle](#)
Handle type for an event definition.
- typedef uint32_t [tek_sa_alarm_handle](#)
Handle type for an alarm definition.
- typedef uint32_t [tek_sa_method_handle](#)
Handle type for a method definition.

Enumerations

- enum `tek_sa_variant_type` {
`TEK_SA_VARIANT_TYPE_NULL` = 0x0 , `TEK_SA_VARIANT_TYPE_BOOL` = 0x1 , `TEK_SA_VARIANT_TYPE_UINT8_T`
= 0x2 , `TEK_SA_VARIANT_TYPE_INT8_T` = 0x3 ,
`TEK_SA_VARIANT_TYPE_UINT16_T` = 0x4 , `TEK_SA_VARIANT_TYPE_INT16_T` = 0x5 , `TEK_SA_VARIANT_TYPE_UINT32_T`
= 0x6 , `TEK_SA_VARIANT_TYPE_INT32_T` = 0x7 ,
`TEK_SA_VARIANT_TYPE_UINT64_T` = 0x8 , `TEK_SA_VARIANT_TYPE_INT64_T` = 0x9 , `TEK_SA_VARIANT_TYPE_FLOAT`
= 0xa , `TEK_SA_VARIANT_TYPE_DOUBLE` = 0xb ,
`TEK_SA_VARIANT_TYPE_DATETIME` = 0xc , `TEK_SA_VARIANT_TYPE_STRING` = 0xd , `TEK_SA_VARIANT_TYPE_GUID`
= 0xe , `TEK_SA_VARIANT_TYPE_BYTE_STRING` = 0xf ,
`TEK_SA_VARIANT_TYPE_COMPLEX` = 0x20 , `TEK_SA_VARIANT_TYPE_FLAG_ARRAY` = 0x40 ,
`TEK_SA_VARIANT_TYPE_FLAG_MATRIX` = 0x80 }

The predefined types which can be processed in the TE.

- enum `tek_sa_field_attributes` { `TEK_SA_FIELD_ATTRIBUTES_WRITABLE` = 0x1 , `TEK_SA_FIELD_ATTRIBUTES_READABLE`
= 0x2 , `TEK_SA_FIELD_ATTRIBUTES_SUBSCRIBABLE` = 0x4 }

Flags type which contains the attributes of a data client field.

- enum `tek_sa_log_level_t` {
`TEK_SA_LOG_LEVEL_TRACE` = 0x0 , `TEK_SA_LOG_LEVEL_DEBUG` = 0x1 , `TEK_SA_LOG_LEVEL_INFO`
= 0x2 , `TEK_SA_LOG_LEVEL_WARNING` = 0x3 ,
`TEK_SA_LOG_LEVEL_ERROR` = 0x4 , `TEK_SA_LOG_LEVEL_CRITICAL` = 0x5 }

Definition of the possible logging levels which can be used in `tek_sa_transformation_engine::log`.

StatusCodes

- typedef int `TEK_SA_RESULT`
The return value type of all interface functions (which need to return information about success of the operation).
- #define `TEK_SA_ERR_SUCCESS` 0
An operation was completed successfully.
- #define `TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE` 10
A data client function was called in an asynchronous manner while the implementation can not use multiple threads.
- #define `TEK_SA_ERR_OUT_OF_MEMORY` 11
The data client or the Transformation Engine can not process a request because it has no more system resources.
- #define `TEK_SA_ERR_INVALID_PARAMETER` 12
The parameters passed to the function are invalid.
- #define `TEK_SA_ERR_RETRY_LATER` 0xffffffff
A data client function was called in an asynchronous manner while the number of inflight calls is already active.
- #define `TEK_SA_READ_RESULT_STATUS_OK` 0
A read operation completed successfully.
- #define `TEK_SA_READ_RESULT_STATUS_NOK` 1
A read operation failed.
- #define `TEK_SA_READ_RESULT_STATUS_TIMEOUT` 2
A read operation did not complete within the specified time limit.
- #define `TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE` 3
The read operation failed because the passed field handle was invalid.
- #define `TEK_SA_BLOCK_TRANSFER_END_OF_FILE` 26
The read operation read until the end of file.
- #define `TEK_SA_BLOCK_TRANSFER_ABORT` 24
The block read or write operation should be stopped.

8.3.1 Detailed Description

The module **Common Definitions** contains functions, structs and typedefs which are used by the [Data Client](#) as well as the [Transformation Engine](#).

8.3.2 Data Structure Documentation

8.3.2.1 struct tek_sa_additional_file

Configuration class which describes an additional file which is passed to the data client.

Definition at line 245 of file [south_api.h](#).

Data Fields

| | | |
|--------|---------|--|
| char * | name | The name of the additional file as written in the configuration. |
| char * | content | The content of additional file. |

8.3.2.2 struct tek_sa_data_client_configuration

Configuration object containing the contents of the configuration files for the [tek_sa_data_client_plugin](#) or [tek_sa_data_client](#) instances.

Definition at line 260 of file [south_api.h](#).

Data Fields

| | | |
|---|------------------------|---|
| char * | config | The configuration file as UTF-8 encoded JSON string |
| struct tek_sa_additional_file * | additional_files | The additional files which are referenced in the configuration. |
| uint32_t | additional_files_count | The number of additional files |

8.3.2.3 struct tek_sa_configuration

Configuration struct that contains generic properties and settings for TEK instance.

Definition at line 278 of file [south_api.h](#).

Data Fields

| | | |
|----------|--------------------|---|
| uint32_t | request_timeout_ms | generic definition for timeouts with linkage to communication to connected dataclients (e.g. requests), value is given in milli-seconds |
|----------|--------------------|---|

8.3.2.4 struct tek_sa_guid

The representation of a GUID when used as a field type.

See also <https://reference.opcfoundation.org/v104/Core/docs/Part6/5.1.3/>

Definition at line 310 of file [south_api.h](#).

Data Fields

| | | |
|----------|----------|------------------|
| uint32_t | data1 | The Data1 field. |
| uint16_t | data2 | The Data2 field. |
| uint16_t | data3 | The Data3 field. |
| uint8_t | data4[8] | The Data4 field. |

8.3.2.5 struct tek_sa_byte_string

The representation of a byte array with variable length when used as a field type.

See <https://reference.opcfoundation.org/Core/docs/Part6/5.2.2/#5.2.2.7>

Definition at line 335 of file [south_api.h](#).

Data Fields

| | | |
|-----------------|--------|--------------------------------|
| int32_t | length | The length of the byte string. |
| unsigned char * | data | The bytes of the byte string |

8.3.2.6 struct tek_sa_string

The representation of a string with variable length when used as a field type.

See <https://reference.opcfoundation.org/Core/docs/Part6/5.2.2/#5.2.2.4>

Attention

The string encoding is always UTF-8.

Definition at line 353 of file [south_api.h](#).

Data Fields

| | | |
|-----------------|--------|---|
| int32_t | length | The length of the byte string. |
| unsigned char * | data | The UTF-8 encoded characters of the string. |

8.3.2.7 struct tek_sa_complex_data

The representation of a field value which has a type which is not a predefined type.

A value with a complex data type which was registered at the tek by calling [tek_sa_transformation_engine::register_struct_type](#).

Definition at line 378 of file [south_api.h](#).

Data Fields

| | | |
|------------------------------------|-------------|---|
| tek_sa_type_handle | type | The type handle of the registered data type. |
| uint32_t | data_length | The number of bytes in the <code>data</code> field. This is needed because the encoded length may differ for items of the same type. |
| unsigned char * | data | The bytes of the serialized value. The serialization is compatible with the binary OPC UA encoding of structures as described in https://reference.opcfoundation.org/v104/Core/docs/Part6/5.2.6/ . |

8.3.2.8 struct tek_sa_complex_data_array_item

The representation of the items of an array of complex data values with exactly one dimension.

See also [tek_sa_complex_data_array](#)

Definition at line 408 of file [south_api.h](#).

Data Fields

| | | |
|-----------------|-------------|---|
| uint32_t | data_length | The number of bytes in the <code>data</code> field. This is needed because the encoded length may differ for items of the same type. |
| unsigned char * | data | The bytes of the serialized value. See also tek_sa_complex_data::data |

8.3.2.9 struct tek_sa_complex_data_array

The representation of an array of complex data with exactly one dimension.

A one-dimensional array of values which are of a complex data type.

Definition at line 434 of file [south_api.h](#).

Data Fields

| | | |
|---|-----------------|--|
| tek_sa_type_handle | type | The type handle of the registered type of the array items. |
| uint32_t | number_of_items | The number of items in the array. |
| struct tek_sa_complex_data_array_item * | data | The array data, which consists of the concatenation of all serialized items. |

8.3.2.10 struct tek_sa_complex_data_matrix

The representation of array of complex data with more than one dimension.

A multi-dimensional array of values which are of a complex data type.

Definition at line 456 of file [south_api.h](#).

Data Fields

| | | |
|---|------------------|---|
| tek_sa_type_handle | type | The type handle of the registered type of the array items. |
| uint32_t | dimension_length | <p>The number of dimensions in the array.</p> <p>Remarks</p> <p>As an explicit number of dimensions is always required, this value can not be less or equal to 0 (unlike the ValueRank in the OPC UA specification).</p> |
| uint32_t * | dimensions | <p>The array dimensions.</p> <p>Multi-dimensional arrays are encoded as a one-dimensional array and this field specifies the dimensions of the array. The original array can be reconstructed using this information. Higher rank dimensions are serialized first. For example, an array with dimensions [2,2,2] is written in this order: [0,0,0], [0,0,1], [0,1,0], [0,1,1], [1,0,0], [1,0,1], [1,1,0], [1,1,1]</p> <p>This is compatible with the encoding used by OPC UA array types: https://reference.opcfoundation.org/v104/Core/docs/Part6/5.2.2/#5.2.2.16</p> |
| struct tek_sa_complex_data_array_item * | data | The array data, which consists of the concatenation of all serialized items. |

8.3.2.11 struct tek_sa_variant_array

The representation of a one dimensional array of the supported base types.

Definition at line 564 of file [south_api.h](#).

Data Fields

| | | |
|---|--------|--------------------------------------|
| uint32_t | length | The number of elements in the array. |
| union tek_sa_variant_array.data | data | The array values. |

8.3.2.12 struct tek_sa_variant_matrix

The representation of an array with more than one dimension of the supported base types.

Definition at line 592 of file [south_api.h](#).

Data Fields

| | | |
|---|------------------|--|
| uint32_t | dimension_length | The number of array dimensions. |
| uint32_t * | dimensions | The array dimensions. Multi-dimensional arrays are encoded as a one-dimensional array and this field specifies the dimensions of the array. The original array can be reconstructed using this information. Higher rank dimensions are serialized first. For example, an array with dimensions [2,2,2] is written in this order: [0,0,0], [0,0,1], [0,1,0], [0,1,1], [1,0,0], [1,0,1], [1,1,0], [1,1,1] This is compatible with the encoding used by OPC UA array types: https://reference.opcfoundation.org/v104/Core/docs/Part6/5.2.2/#5.2.2.16 |
| struct tek_sa_variant_array | data | The array values. |

8.3.2.13 struct tek_sa_variant

The representation of a single value (which may be of array type too).

The built-in types (bool, (u)int_{8,16,32,64}_t, strings, guids, datetime correspond to a subset of the types defined at <https://reference.opcfoundation.org/Core/docs/Part6/5.1.2/> and are encoded as described in <https://reference.opcfoundation.org/Core/docs/Part6/5.2.2/>.

Definition at line 624 of file [south_api.h](#).

Data Fields

| | | |
|---|------|--|
| uint8_t | type | The type of the value. Must be one of the values described in tek_sa_variant_type . |
| union tek_sa_variant.data | data | The value. |

8.3.2.14 struct tek_sa_struct_field_type_definition

The type definition of a record field in a user defined struct type.

Definition at line 669 of file [south_api.h](#).

Data Fields

| | | |
|---|------|---|
| char * | name | The name of the data field. |
| tek_sa_type_handle_or_type_enum | type | The type of the field, represented as type_handle or type_enum. |

8.3.2.15 struct tek_sa_struct_definition

The type definition of a user defined record type.

Definition at line 682 of file [south_api.h](#).

Data Fields

| | | |
|--|------------|--|
| char * | name | The name of the type. |
| struct tek_sa_struct_field_type_definition * | items | The definition of the record fields. |
| uint32_t | item_count | The number of fields in the record type. |

8.3.2.16 struct tek_sa_enum_item_definition

The definition of an enum item which is defined in a user defined enum type.

Definition at line 700 of file [south_api.h](#).

Data Fields

| | | |
|---------|-------|-------------------------------------|
| char * | name | The name of the enum item. |
| int32_t | value | The numeric value of the enum item. |

8.3.2.17 struct tek_sa_enum_definition

The type definition of a user defined enum type.

Definition at line 713 of file [south_api.h](#).

Data Fields

| | | |
|--|------------|---------------------------------------|
| char * | name | The name of the type. |
| struct tek_sa_enum_item_definition * | items | The defined enum values of this type. |
| uint32_t | item_count | The number of defined enum values. |

8.3.2.18 struct tek_sa_method_argument_description

The description of a method parameter.

See [tek_sa_transformation_engine::register_method](#)

Definition at line 732 of file [south_api.h](#).

Data Fields

| | | |
|--|------|-----------------------------------|
| char const * | name | The name of the method parameter. |
| enum tek_sa_variant_type | type | The type of the method parameter. |

8.3.2.19 struct tek_sa_field_write_request

Structure to encapsulate the parameters of a write field request.

Definition at line 859 of file [south_api.h](#).

Data Fields

| | | |
|-------------------------------------|--------|--|
| tek_sa_field_handle | handle | The field handle as returned from tek_sa_transformation_engine::register_field . |
| tek_sa_field_value | value | The value to be written to the field. |

8.3.2.20 struct tek_sa_write_result

Structure to encapsulate the result of a write field request.

Definition at line 871 of file [south_api.h](#).

Data Fields

| | | |
|-------------------------------------|--------|----------------------------------|
| TEK_SA_RESULT | status | The write operation result. |
| tek_sa_field_handle | handle | The handle of the field written. |

8.3.2.21 struct tek_sa_read_result

Structure to encapsulate the result of a read operation of a single field.

Definition at line 883 of file [south_api.h](#).

Data Fields

| | | |
|-------------------------------------|--------|--|
| TEK_SA_RESULT | status | The read operation result. |
| tek_sa_field_handle | handle | The handle of the read field. |
| tek_sa_field_value | value | The read value. Attention Must not be accessed if the <code>status</code> is not TEK_SA_ERR_SUCCESS |

8.3.2.22 struct tek_sa_event_parameter

Structure to encapsulate an event parameter.

Definition at line 903 of file [south_api.h](#).

Data Fields

| | | |
|------------------------------------|-------|-----------------------------------|
| <code>char const *</code> | name | The name of the parameter. |
| tek_sa_field_value | value | The value of the event parameter. |

8.3.2.23 struct tek_sa_dc_event

An event which may be sent from the data client to `tek_sa_transformation_engine::post_event`.

Definition at line 915 of file `south_api.h`.

Data Fields

| | | |
|--|----------------------|--|
| <code>tek_sa_datetime</code> | timestamp | <p>The Timestamp of the event.</p> <p>Remarks</p> <p>This should be the a value as close as possible to the actual occurrence of the event.</p> |
| <code>int16_t</code> | severity | <p>The severity level of the event.</p> <p>The severity is defined as in https://reference.opcfoundation.org/v104/Core/docs/Part5/6.4.2/ which is cited here:</p> <p>Severity is an indication of the urgency of the Event. This is also commonly called “priority”. Values will range from 1 to 1 000, with 1 being the lowest severity and 1 000 being the highest. Typically, a severity of 1 would indicate an Event which is informational in nature, while a value of 1 000 would indicate an Event of catastrophic nature, which could potentially result in severe financial loss or loss of life.</p> |
| <code>tek_sa_event_handle</code> | event_type | <p>The event type handle as returned by the call to <code>tek_sa_transformation_engine::register_event</code>.</p> <p>Attention</p> <p>This field must not be <code>TEK_SA_EVENT_HANDLE_INVALID</code></p> <p>Todo [A] Depending on the decision about the concept of invalid handles, this has to be removed.</p> |
| <code>tek_sa_field_handle</code> | source | <p>The handle of the source of the event.</p> <p>The source of the event is a field in the data client. As not all events have a source, this field may be equal to <code>TEK_SA_FIELD_HANDLE_INVALID</code>.</p> <p>Todo [A] At this point the concept of invalid handle is used but that concept was dropped</p> |
| <code>uint32_t</code> | number_of_parameters | The number of event parameters. |
| struct <code>tek_sa_event_parameter</code> * | parameters | The event parameters. |

8.3.2.24 union tek_sa_variant_array.data

The array values.

Definition at line 569 of file [south_api.h](#).

Data Fields

| | | |
|---|------|--|
| bool * | b | |
| uint8_t * | ui8 | |
| int8_t * | i8 | |
| uint16_t * | ui16 | |
| int16_t * | i16 | |
| uint32_t * | ui32 | |
| int32_t * | i32 | |
| uint64_t * | ui64 | |
| int64_t * | i64 | |
| float * | f | |
| double * | d | |
| tek_sa_datetime * | dt | |
| struct tek_sa_string * | s | |
| struct tek_sa_guid * | guid | |
| struct tek_sa_byte_string * | bs | |

8.3.2.25 union tek_sa_variant.data

The value.

Definition at line 633 of file [south_api.h](#).

Data Fields

| | | |
|---|----------------|--|
| bool | b | |
| uint8_t | ui8 | |
| int8_t | i8 | |
| uint16_t | ui16 | |
| int16_t | i16 | |
| uint32_t | ui32 | |
| int32_t | i32 | |
| uint64_t | ui64 | |
| int64_t | i64 | |
| float | f | |
| double | d | |
| tek_sa_datetime | dt | |
| struct tek_sa_string | s | |
| struct tek_sa_guid | guid | |
| struct tek_sa_byte_string | bs | |
| struct tek_sa_variant_array | array | |
| struct tek_sa_variant_matrix | matrix | |
| struct tek_sa_complex_data | complex | |
| struct tek_sa_complex_data_array | complex_array | |
| struct tek_sa_complex_data_matrix | complex_matrix | |

8.3.3 Macro Definition Documentation

8.3.3.1 TEK_SA_ERR_SUCCESS

```
#define TEK_SA_ERR_SUCCESS 0
```

An operation was completed successfully.

Definition at line 784 of file [south_api.h](#).

8.3.3.2 TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE

```
#define TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE 10
```

A data client function was called in an asynchronous manner while the implementation can not use multiple threads.

The TEK will call the function in a synchronous manner again.

See [Asynchronous Data Client calls](#) and [tek_sa_data_client_capabilities](#)

Definition at line 795 of file [south_api.h](#).

8.3.3.3 TEK_SA_ERR_OUT_OF_MEMORY

```
#define TEK_SA_ERR_OUT_OF_MEMORY 11
```

The data client or the Transformation Engine can not process a request because it has no more system resources.

Definition at line 801 of file [south_api.h](#).

8.3.3.4 TEK_SA_ERR_INVALID_PARAMETER

```
#define TEK_SA_ERR_INVALID_PARAMETER 12
```

The parameters passed to the function are invalid.

Definition at line 804 of file [south_api.h](#).

8.3.3.5 TEK_SA_ERR_RETRY_LATER

```
#define TEK_SA_ERR_RETRY_LATER 0xffffffff
```

A data client function was called in an asynchronous manner while the number of inflight calls is already active.

The TEK will call the function again at a later time.

See [Asynchronous Data Client calls](#) and [tek_sa_data_client_capabilities](#)

Definition at line 816 of file [south_api.h](#).

8.3.3.6 TEK_SA_READ_RESULT_STATUS_OK

```
#define TEK_SA_READ_RESULT_STATUS_OK 0
```

A read operation completed successfully.

Definition at line 819 of file [south_api.h](#).

8.3.3.7 TEK_SA_READ_RESULT_STATUS_NOK

```
#define TEK_SA_READ_RESULT_STATUS_NOK 1
```

A read operation failed.

Definition at line 822 of file [south_api.h](#).

8.3.3.8 TEK_SA_READ_RESULT_STATUS_TIMEOUT

```
#define TEK_SA_READ_RESULT_STATUS_TIMEOUT 2
```

A read operation did not complete within the specified time limit.

Definition at line 825 of file [south_api.h](#).

8.3.3.9 TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE

```
#define TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE 3
```

The read operation failed because the passed field handle was invalid.

Definition at line 829 of file [south_api.h](#).

8.3.3.10 TEK_SA_BLOCK_TRANSFER_END_OF_FILE

```
#define TEK_SA_BLOCK_TRANSFER_END_OF_FILE 26
```

The read operation read until the end of file.

This result value applies to the [tek_sa_transformation_engine::block_read_data](#) callback.

Definition at line 837 of file [south_api.h](#).

8.3.3.11 TEK_SA_BLOCK_TRANSFER_ABORT

```
#define TEK_SA_BLOCK_TRANSFER_ABORT 24
```

The block read or write operation should be stopped.

This result value applies to the [tek_sa_transformation_engine::block_read_data](#) and the [tek_sa_transformation_engine::block_write_data](#) callback.

Definition at line 846 of file [south_api.h](#).

8.3.3.12 TEK_SA_ERR_UNSPECIFIED

```
#define TEK_SA_ERR_UNSPECIFIED 1000
```

unspecified error to be used when no more specific error is available.

Definition at line 852 of file [south_api.h](#).

8.3.4 Typedef Documentation

8.3.4.1 tek_sa_type_handle

```
typedef int64_t tek_sa_type_handle
```

The type of a handle which is returned for user defined types.

The TEK creates a unique type handle for every type registered with a call to [tek_sa_transformation_engine::register_struct_type](#) or [tek_sa_transformation_engine::register_enum_type](#). The TEK also ensures that the value range of these handles does not overlap with [tek_sa_variant_type](#).

Definition at line 298 of file [south_api.h](#).

8.3.4.2 tek_sa_type_handle_or_type_enum

```
typedef int64_t tek_sa_type_handle_or_type_enum
```

The type for a reference handle which references either a user defined type (see `tek_sa_type_handle`) or a predefined type (See `tek_sa_variant_type`.)

Definition at line 304 of file `south_api.h`.

8.3.4.3 tek_sa_datetime

```
typedef int64_t tek_sa_datetime
```

The type of date and time values wen used as a field type.

The definition is based on OPC UA DateTime (see <https://reference.opcfoundation.org/Core/docs/Part6/5.2.2/#5.2.2.5>)

Definition at line 369 of file `south_api.h`.

8.3.4.4 tek_sa_field_value

```
typedef struct tek_sa_variant tek_sa_field_value
```

Type of data client field values.

Definition at line 660 of file `south_api.h`.

8.3.4.5 tek_sa_field_handle

```
typedef uint32_t tek_sa_field_handle
```

Handle type for a field definition.

Definition at line 759 of file `south_api.h`.

8.3.4.6 tek_sa_event_handle

```
typedef uint32_t tek_sa_event_handle
```

Handle type for an event definition.

Definition at line 762 of file `south_api.h`.

8.3.4.7 tek_sa_alarm_handle

```
typedef uint32_t tek_sa_alarm_handle
```

Handle type for an alarm definition.

Definition at line 765 of file [south_api.h](#).

8.3.4.8 tek_sa_method_handle

```
typedef uint32_t tek_sa_method_handle
```

Handle type for a method definition.

Definition at line 768 of file [south_api.h](#).

8.3.4.9 TEK_SA_RESULT

```
typedef int TEK_SA_RESULT
```

The return value type of all interface functions (which need to return information about success of the operation).

Definition at line 781 of file [south_api.h](#).

8.3.5 Enumeration Type Documentation

8.3.5.1 tek_sa_variant_type

```
enum tek_sa_variant_type
```

The predefined types which can be processed in the TE.

This enum type is a composition of enum and flag values. Each enum value (the ones *not* starting with "TEK_SA_VARIANT_TYPE_FLAG") may be combined with zero or one flags (the ones starting with "TEK_SA_VARIANT_TYPE_FLAG").

Enumerator

| | |
|------------------------------|---|
| TEK_SA_VARIANT_TYPE_NULL | The invalid type id. |
| TEK_SA_VARIANT_TYPE_BOOL | The type id of a bool value. |
| TEK_SA_VARIANT_TYPE_UINT8_T | The type id of an unsigned byte value. |
| TEK_SA_VARIANT_TYPE_INT8_T | The type id of a signed byte value. |
| TEK_SA_VARIANT_TYPE_UINT16_T | The type id of an unsigned short value. |
| TEK_SA_VARIANT_TYPE_INT16_T | The type id of a signed short value. |

Enumerator

| | |
|---------------------------------|---|
| TEK_SA_VARIANT_TYPE_UINT32_T | The type id of an unsigned 32bit integer value. |
| TEK_SA_VARIANT_TYPE_INT32_T | The type id of a signed 32bit integer value value. |
| TEK_SA_VARIANT_TYPE_UINT64_T | The type id of an unsigned 64bit integer value. |
| TEK_SA_VARIANT_TYPE_INT64_T | The type id of a signed 64bit integer value. |
| TEK_SA_VARIANT_TYPE_FLOAT | The type id of a 32bit floating point value. |
| TEK_SA_VARIANT_TYPE_DOUBLE | The type id of a 64bit floating point value. |
| TEK_SA_VARIANT_TYPE_DATETIME | The type id of a date and time value. See tek_sa_datetime . |
| TEK_SA_VARIANT_TYPE_STRING | The type id of a string value. See tek_sa_string . |
| TEK_SA_VARIANT_TYPE_GUID | The type id of a GUID value. See tek_sa_guid . |
| TEK_SA_VARIANT_TYPE_BYTE_STRING | The type id of a byte string value. See tek_sa_byte_string . |
| TEK_SA_VARIANT_TYPE_COMPLEX | The type id of a value with a complex data type. See tek_sa_transformation_engine::register_struct_type . |
| TEK_SA_VARIANT_TYPE_FLAG_ARRAY | The flag which is set to declare an array with one dimension of the base type. |
| TEK_SA_VARIANT_TYPE_FLAG_MATRIX | The flag which is set to declare an array with more than one dimension of the base type. |

Definition at line 500 of file [south_api.h](#).

8.3.5.2 tek_sa_field_attributes

```
enum tek_sa_field_attributes
```

Flags type which contains the attributes of a data client field.

Enumerator

| | |
|--------------------------------------|---|
| TEK_SA_FIELD_ATTRIBUTES_WRITABLE | The attribute to mark a field as writeable. |
| TEK_SA_FIELD_ATTRIBUTES_READABLE | The attribute to mark a field as readable. |
| TEK_SA_FIELD_ATTRIBUTES_SUBSCRIBABLE | The attribute to mark a field which can be subscribed to. |

Definition at line 747 of file [south_api.h](#).

8.3.5.3 tek_sa_log_level_t

```
enum tek_sa_log_level_t
```

Definition of the possible logging levels which can be used in [tek_sa_transformation_engine::log](#).

Enumerator

| | |
|------------------------|--|
| TEK_SA_LOG_LEVEL_TRACE | |
| TEK_SA_LOG_LEVEL_DEBUG | |

Enumerator

| | |
|---------------------------|--|
| TEK_SA_LOG_LEVEL_INFO | |
| TEK_SA_LOG_LEVEL_WARNING | |
| TEK_SA_LOG_LEVEL_ERROR | |
| TEK_SA_LOG_LEVEL_CRITICAL | |

Definition at line [978](#) of file [south_api.h](#).

Chapter 9

Data Structure Documentation

9.1 tek_sa_data_client Struct Reference

The interface of one instance of a data client.

```
#include <south_api.h>
```

Data Fields

Lifecycle functions

- [TEK_SA_RESULT\(* register_features\)](#)([tek_sa_data_client_handle](#) dc)
Register all known features of the data client.
- [TEK_SA_RESULT\(* connect\)](#)([tek_sa_data_client_handle](#) dc)
Connect the data client to the data source.
- [void\(* free\)](#)([tek_sa_data_client_handle](#) dc)
Frees the data client and releases all its resources.

Data client functions

- [TEK_SA_RESULT\(* read_fields\)](#)([tek_sa_data_client_handle](#) dc, [uint64_t](#) request_id, const [tek_sa_field_handle](#) items_to_read[], [uint32_t](#) number_of_items, bool do_not_block)
Function to read one or more fields from the data client. The call may be executed in a synchronous or asynchronous manner (See parameter [do_not_block](#)).
- [TEK_SA_RESULT\(* write_fields\)](#)([tek_sa_data_client_handle](#) dc, [uint64_t](#) request_id, const struct [tek_sa_field_write_request](#) items_to_write[], [uint32_t](#) number_of_items, bool do_not_block)
Function to write values to data client fields.
- [TEK_SA_RESULT\(* block_read\)](#)(const [tek_sa_data_client_handle](#) dc, [uint64_t](#) request_id, const char *filepath, [uint64_t](#) offset, [int64_t](#) length, bool do_not_block, [int64_t](#) *filesize)
Starts a block transfer from the client to the TEK.
- [TEK_SA_RESULT\(* block_write\)](#)(const [tek_sa_data_client_handle](#) dc, [uint64_t](#) request_id, const char *filepath, [uint64_t](#) offset, [int64_t](#) length, bool do_not_block)
Start a block transfer from the TEK to the data client.
- [TEK_SA_RESULT\(* subscribe\)](#)([tek_sa_data_client_handle](#) dc, const [tek_sa_field_handle](#) items_to_subscribe[], [uint32_t](#) number_of_items)
Subscribe to changes of one ore more data client fields.
- [TEK_SA_RESULT\(* unsubscribe\)](#)([tek_sa_data_client_handle](#) dc, const [tek_sa_field_handle](#) items_to_unsubscribe[], [uint32_t](#) number_of_items)
Unsubscribe to changes of one ore more data client fields.

- `TEK_SA_RESULT(* invoke)(const tek_sa_data_client_handle dc, const tek_sa_method_handle method, uint64_t request_id, const tek_sa_field_value parameters[], const uint32_t number_of_parameters)`
Invoke a method on the data client.
- `TEK_SA_RESULT(* acknowledge_alarm)(tek_sa_data_client_handle dc, const tek_sa_alarm_handle alarm)`
Acknowledge an alarm in the data client.

Data fields

- `tek_sa_data_client_handle handle`
The handle that is passed as first parameter in all functions of this interface.

9.1.1 Detailed Description

The interface of one instance of a data client.

Definition at line 1057 of file `south_api.h`.

9.1.2 Field Documentation

9.1.2.1 register_features

```
TEK_SA_RESULT(* tek_sa_data_client::register_features) (tek_sa_data_client_handle dc)
```

Register all known features of the data client.

Parameters

| | |
|-----------|--|
| <i>dc</i> | data client handle features are registered for |
|-----------|--|

This method is called from the TEK after the data client was created and before is will be connected. See also [Initialization of a data client plugin](#)

A data client implementation should evaluate the configuration (passed to `tek_sa_data_client_plugin::data_client_new`) and register all known types fields, events, methods and alarms.

A connection to the controller must not be established.

Definition at line 1075 of file `south_api.h`.

9.1.2.2 connect

```
TEK_SA_RESULT(* tek_sa_data_client::connect) (tek_sa_data_client_handle dc)
```

Connect the data client to the data source.

This method is called from the TEK after the data client has registered its features. See also [Initialization of a data client plugin](#).

A data client implementation should connect to the data source and register additional features and capabilities.

If the data client can not connect to the data source it should keep trying to connect after the method call completed but it should not block.

Definition at line 1089 of file [south_api.h](#).

9.1.2.3 free

```
void(* tek_sa_data_client::free) (tek_sa_data_client_handle dc)
```

Frees the data client and releases all its resources.

Should be called by the TEK.

Definition at line 1096 of file [south_api.h](#).

9.1.2.4 read_fields

```
TEK_SA_RESULT(* tek_sa_data_client::read_fields) (tek_sa_data_client_handle dc, uint64_t request_id, const tek_sa_field_handle items_to_read[], uint32_t number_of_items, bool do_not_block)
```

Function to read one or more fields from the data client. The call may be executed in a synchronous or asynchronous manner (See parameter `do_not_block`).

The values of the requested fields are sent by calling the [tek_sa_transformation_engine::read_result](#) callback function. The data client must preserve the order of the fields in the results that are provided in [tek_sa_transformation_engine::read_result](#) callback.

If the time needed to retrieve the values is larger than half the global timeout value a data client must call the [vde_sa_tek_ap::read_progress](#) callback function.

Parameters

| | |
|------------------------|---|
| <i>dc</i> | The handle of the data client as returned from tek_sa_data_client_plugin::data_client_new . |
| <i>request_id</i> | A unique request identifier which is created by the TEK and must be passed to call to tek_sa_transformation_engine::read_result and tek_sa_transformation_engine::read_progress . |
| <i>items_to_read</i> | An array of field handles which describes the values the data client should read. See also function tek_sa_transformation_engine::register_field . |
| <i>number_of_items</i> | The number of handles in the parameter <code>items_to_read</code> . |
| <i>do_not_block</i> | A boolean flag that, when set to <i>true</i> , tells the data client that it should return immediately and return the read field values later in another thread. |

Returns

[TEK_SA_ERR_SUCCESS](#) when the call succeeded.

[TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE](#) if `do_not_block` is set to `true` and the called data client is not able to do nonblocking calls. The TEK will retry with `do_not_block` set to `false`

[TEK_SA_ERR_OUT_OF_MEMORY](#) when the data client can not allocate the data structures and resources to read the fields.

any other error which applies to the read function

Todo [B, TEAM] define error values of read function

Attention

It is mandatory that the data client does not block when called with parameter `do_not_block` set to `true`.

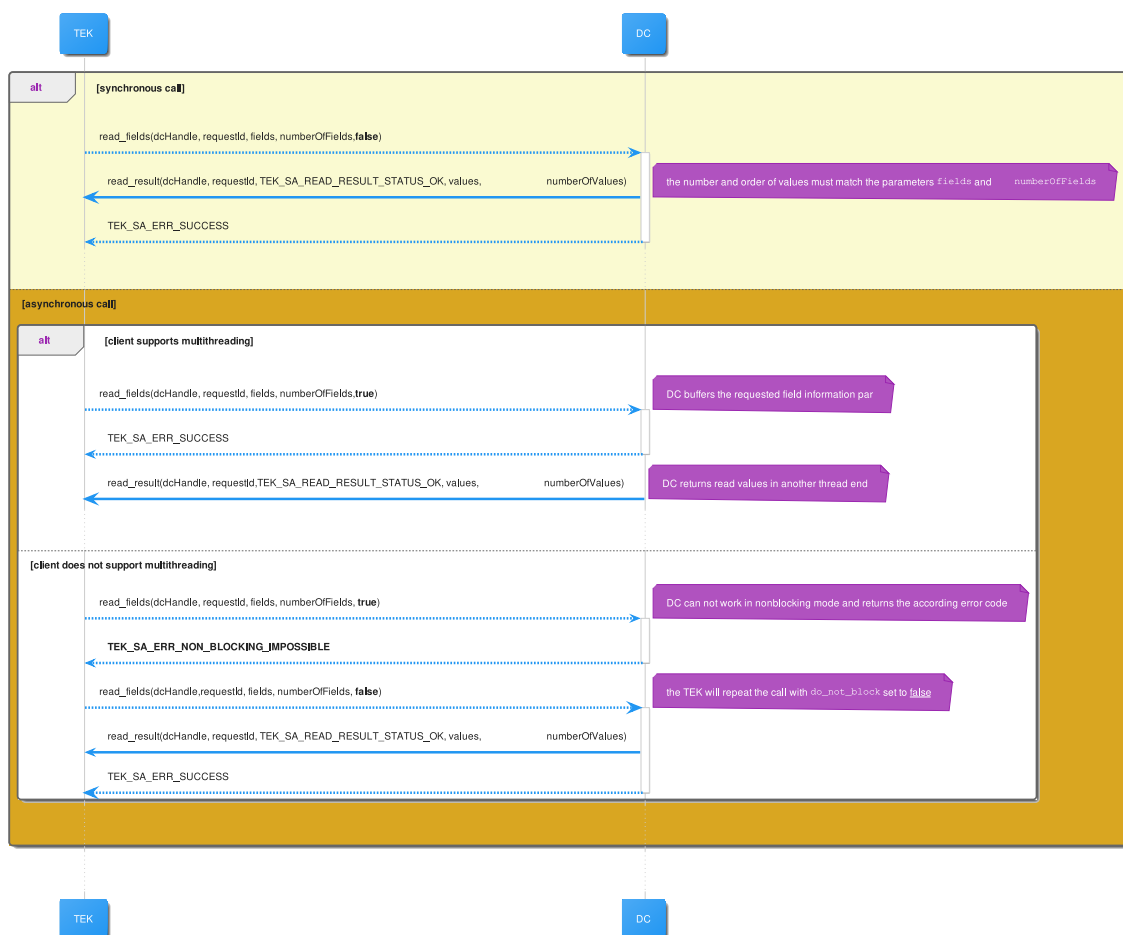
Usage of the Parameter `do_not_block`

Figure 9.1 Possible call sequences

Definition at line 1194 of file [south_api.h](#).

9.1.2.5 write_fields

```
TEK_SA_RESULT(* tek_sa_data_client::write_fields) (tek_sa_data_client_handle dc, uint64_t request_id, const struct tek_sa_field_write_request items_to_write[], uint32_t number_of_items, bool do_not_block)
```

Function to write values to data client fields.

Parameters

| | |
|------------------------|--|
| <i>dc</i> | The handle of the data client as returned from tek_sa_data_client_plugin::data_client_new . |
| <i>request_id</i> | A unique request identifier which is created by the TEK and must be passed to call to tek_sa_transformation_engine::write_result . |
| <i>items_to_write</i> | An array of field handles and their values which describes the values the data client should write. |
| <i>number_of_items</i> | The number of handles in the parameter <i>items_to_write</i> . |
| <i>do_not_block</i> | A boolean flag that, when set to <i>true</i> , tells the data client that it should return immediately and write the values in the background. See also Usage in read_fields |

Todo [B, TEAM] should the data client call a progress function if the operation needs more time?

Definition at line 1218 of file [south_api.h](#).

9.1.2.6 block_read

```
TEK_SA_RESULT(* tek_sa_data_client::block_read) (const tek_sa_data_client_handle dc, uint64_t request_id, const char *filepath, uint64_t offset, int64_t length, bool do_not_block, int64_t *filesize)
```

Starts a block transfer from the client to the TEK.

For example, read a file from the device.

Parameters

| | |
|---------------------|--|
| <i>dc</i> | The data client handle |
| <i>request_id</i> | The request id for the TEK API callbacks |
| <i>filepath</i> | The file or address of the block to be read. The format is data client specific. The pointer must be in utf-8. |
| <i>offset</i> | The offset in the data |
| <i>length</i> | A specific length, or -1 for the whole data |
| <i>do_not_block</i> | See Usage in read_fields |
| <i>filesize</i> | The file size will be written by the data client, or -1 if not known at the call |

Returns

An information about the success or failure of the operation.

The data is not yet passed to this method directly but sent from the data client in chunks to the [tek_sa_transformation_engine::block_read_data](#) callback.

Definition at line 1245 of file [south_api.h](#).

9.1.2.7 block_write

```
TEK_SA_RESULT(* tek_sa_data_client::block_write) (const tek\_sa\_data\_client\_handle dc, uint64_t request_id, const char *filepath, uint64_t offset, int64_t length, bool do_not_block)
```

Start a block transfer from the TEK to the data client.

Parameters

| | |
|---------------------|---|
| <i>dc</i> | The handle of the data client as returned from tek_sa_data_client_plugin::data_client_new . |
| <i>request_id</i> | A unique request identifier which is created by the TEK and must be passed to call to tek_sa_transformation_engine::block_write_result and tek_sa_transformation_engine::block_write_data . |
| <i>offset</i> | The offset in the data |
| <i>length</i> | A specific length, or -1 for the whole data |
| <i>do_not_block</i> | See Usage in read_fields |

Returns

An information about the success or failure of the operation.

The data is not yet passed to this method directly but requested from the data client in chunks from the [tek_sa_transformation_engine::block_write_data](#) callback.

Definition at line 1272 of file [south_api.h](#).

9.1.2.8 subscribe

```
TEK_SA_RESULT(* tek_sa_data_client::subscribe) (tek\_sa\_data\_client\_handle dc, const tek\_sa\_field\_handle items_to_subscribe[], uint32_t number_of_items)
```

Subscribe to changes of one ore more data client fields.

Parameters

| | |
|---------------------------|---|
| <i>dc</i> | The handle of the data client as returned from tek_sa_data_client_plugin::data_client_new . |
| <i>items_to_subscribe</i> | The fields for which change events will be received. |
| <i>number_of_items</i> | The number of elements in the <i>items_to_subscribe</i> parameter. |

Todo [D, TEAM] add sampling rate parameter

The subscription mechanism is very easy compared to that of the OPC UA specification. The TEK can subscribe to each field only once and all changes are signaled by a call to the `tek_sa_data_transformation_engine::notify_↔` change callback.

Definition at line 1296 of file `south_api.h`.

9.1.2.9 unsubscribe

```
TEK_SA_RESULT(* tek_sa_data_client::unsubscribe) (tek_sa_data_client_handle dc, const tek_sa_field_handle
items_to_unsubscribe[], uint32_t number_of_items)
```

Unsubscribe to changes of one ore more data client fields.

Parameters

| | |
|-----------------------------|---|
| <i>dc</i> | The handle of the data client as returned from tek_sa_data_client_plugin::data_client_new . |
| <i>items_to_unsubscribe</i> | The fields for which no more change events will be received. |
| <i>number_of_items</i> | The number of elements in the <code>items_to_unsubscribe</code> parameter. |

Definition at line 1310 of file `south_api.h`.

9.1.2.10 invoke

```
TEK_SA_RESULT(* tek_sa_data_client::invoke) (const tek_sa_data_client_handle dc, const tek_sa_method_handle
method, uint64_t request_id, const tek_sa_field_value parameters[], const uint32_t number_of↔
_parameters)
```

Invoke a method on the data client.

Providing this function ins optional

Parameters

| | |
|-----------------------------|---|
| <i>dc</i> | The handle of the data client as returned from tek_sa_data_client_plugin::data_client_new . |
| <i>method</i> | The method handle which is returned from the <code>tek_sa_data_transformation_engine::register_method</code> method. |
| <i>request_id</i> | A unique request identifier which is created by the TEK and must be passed to call to tek_sa_transformation_engine::block_write_result and tek_sa_transformation_engine::block_write_data . |
| <i>parameters</i> | The parameters of the method. Number and type must match the method registration. |
| <i>number_of_parameters</i> | The number of parameters in the <code>parameters</code> array. |

The outcome of the message call is returned in the [tek_sa_transformation_engine::call_method_result](#) callback.

Definition at line 1337 of file [south_api.h](#).

9.1.2.11 acknowledge_alarm

```
TEK_SA_RESULT(* tek_sa_data_client::acknowledge_alarm) (tek_sa_data_client_handle dc, const
tek_sa_alarm_handle alarm)
```

Acknowledge an alarm in the data client.

Parameters

| | |
|--------------|---|
| <i>dc</i> | The handle of the data client as returned from tek_sa_data_client_plugin::data_client_new . |
| <i>alarm</i> | An alarm handle which is returned from the method tek_sa_transformation_engine::register_alarm . |

Called by TEK to signal triggered alarm has acknowledged by TEK consumer. The alarm may or may not be raised before with a call to [tek_sa_transformation_engine::set_alarm](#). When the alarm condition is not true anymore, then the data client implementation has to reset the alarm and call [tek_sa_transformation_engine::reset_alarm](#)

Definition at line 1358 of file [south_api.h](#).

9.1.2.12 handle

```
tek_sa_data_client_handle tek_sa_data_client::handle
```

The handle that is passed as first parameter in all functions of this interface.

Definition at line 1369 of file [south_api.h](#).

The documentation for this struct was generated from the following file:

- [include/south_api.h](#)

9.2 tek_sa_data_client_plugin Struct Reference

Interface of the data client plugin.

```
#include <south_api.h>
```

Data Fields

- void * [plugin_context](#)
The (private) plugin context. Must be freed using free_context on unloading the plugin.
- [TEK_SA_RESULT](#)(* [data_client_new](#))(void *[plugin_context](#), const struct [tek_sa_data_client_configuration](#) *config, struct [tek_sa_data_client](#) *created_client, struct [tek_sa_data_client_capabilities](#) *capabilities)
Allocates and initializes the data client with a configuration. Prepare callbacks in data_client.
- void(* [free_context](#))(void *[plugin_context](#))
Frees the private context of the plugin.

9.2.1 Detailed Description

Interface of the data client plugin.

The data client plugin is created once as result of a call to the `load_plugin` method();

Definition at line 1393 of file [south_api.h](#).

9.2.2 Field Documentation

9.2.2.1 plugin_context

```
void* tek_sa_data_client_plugin::plugin_context
```

The (private) plugin context. Must be freed using `free_context` on unloading the plugin.

Definition at line 1398 of file [south_api.h](#).

9.2.2.2 data_client_new

```
TEK\_SA\_RESULT(* tek\_sa\_data\_client\_plugin::data\_client\_new) (void *plugin\_context, const struct tek\_sa\_data\_client\_configuration *config, struct tek\_sa\_data\_client *created_client, struct tek\_sa\_data\_client\_capabilities *capabilities)
```

Allocates and initializes the data client with a configuration. Prepare callbacks in `data_client`.

Does not perform any actions like connecting to the data source or register information at the TEK.

Parameters

| | |
|-----------------------|---|
| <i>plugin_context</i> | |
| <i>config</i> | |
| <i>created_client</i> | |
| <i>capabilities</i> | The data client capabilities (known before connect), e.g. the threading model of the data client. Capabilities can be updated by the client using the TEK API, if additional information are retrieved later in the lifecycle of the data client. |

Returns

failure code or success

Definition at line 1416 of file [south_api.h](#).

9.2.2.3 free_context

```
void(* tek_sa_data_client_plugin::free_context) (void *plugin_context)
```

Frees the private context of the plugin.

Definition at line 1424 of file [south_api.h](#).

The documentation for this struct was generated from the following file:

- [include/south_api.h](#)

9.3 tek_sa_transformation_engine Struct Reference

Interface of the Transformation Engine.

```
#include <south_api.h>
```

Data Fields**Registration functions for data client operations and data fields**

- [TEK_SA_RESULT](#)(* [register_field](#))([tek_sa_data_client_handle](#) dc, const char *name, enum [tek_sa_field_attributes](#) attributes, enum [tek_sa_variant_type](#) type, [tek_sa_field_handle](#) *new_field_handle)
Registers a new field of a data client with a name inside the TEK.
- [TEK_SA_RESULT](#)(* [register_method](#))([tek_sa_data_client_handle](#) dc, const char *name, struct [tek_sa_method_argument_description](#) input_parameter[], uint32_t number_of_input_parameters, struct [tek_sa_method_argument_description](#) output_parameter[], uint32_t number_of_output_parameters, [tek_sa_method_handle](#) *new_method_handle)
Registers a new method at the TEK.
- [TEK_SA_RESULT](#)(* [register_event](#))([tek_sa_data_client_handle](#) dc, const char *name, [tek_sa_event_handle](#) *new_event_handle)
Registers a new Event that a data client might raise.
- [TEK_SA_RESULT](#)(* [register_alarm](#))([tek_sa_data_client_handle](#) dc, const char *name, const int16_t severity, const [tek_sa_field_handle](#) source, [tek_sa_alarm_handle](#) *new_alarm_handle)
Registers an alarm at the TEK.

Registration functions for extended types

- [TEK_SA_RESULT](#)(* [register_enum_type](#))([tek_sa_data_client_handle](#) dc, struct [tek_sa_enum_definition](#) const *type_definition, [tek_sa_type_handle](#) *new_type_handle)
Register a user defined enum type.
- [TEK_SA_RESULT](#)(* [register_struct_type](#))([tek_sa_data_client_handle](#) dc, struct [tek_sa_struct_definition](#) const *type_definition, [tek_sa_type_handle](#) *new_type_handle)

Register a user defined struct type.

Alarm and Event functions

- `TEK_SA_RESULT(* post_event)(tek_sa_data_client_handle dc, struct tek_sa_dc_event const *event)`
Post an event which was declared with a call to either [get_global_event](#) or [register_event](#).
- `TEK_SA_RESULT(* set_alarm)(tek_sa_data_client_handle dc, const tek_sa_alarm_handle alarm)`
Sets an alarm.
- `TEK_SA_RESULT(* reset_alarm)(tek_sa_data_client_handle dc, const tek_sa_alarm_handle alarm)`
Clears/resets an alarm.

Miscellaneous functions

- `TEK_SA_RESULT(* log)(tek_sa_data_client_handle source, enum tek_sa_log_level_t lvl, const char *format, va_list args)`
Logging function for data clients.
- `tek_sa_event_handle(* get_global_event)(const char *name)`
Get a handle of a globally defined event.
- `TEK_SA_RESULT(* update_capabilities)(tek_sa_data_client_handle dc, struct tek_sa_data_client_capabilities const *capabilities)`
Notifies the TEK of the change of the client's capabilities.

Data client callbacks

- `TEK_SA_RESULT(* read_progress)(tek_sa_data_client_handle dc, uint64_t request_id, uint64_t progress)`
Callback to signal progress of a read operation to the TEK.
- `TEK_SA_RESULT(* read_result)(tek_sa_data_client_handle dc, uint64_t request_id, TEK_SA_RESULT result, const struct tek_sa_read_result results[], uint32_t number_of_results)`
Callback of the data client read operation.
- `TEK_SA_RESULT(* notify_change)(tek_sa_data_client_handle dc, const struct tek_sa_read_result changes[], uint32_t number_of_changes)`
Callback to notify about a change of subscribed data fields.
- `TEK_SA_RESULT(* write_result)(tek_sa_data_client_handle dc, uint64_t request_id, TEK_SA_RESULT result, const struct tek_sa_write_result results[], uint32_t number_of_results)`
Callback of the data client write operation.
- `TEK_SA_RESULT(* call_method_result)(tek_sa_data_client_handle dc, uint64_t request_id, TEK_SA_RESULT result, const tek_sa_field_value results[], uint32_t number_of_results)`
Callback of a data client method call.
- `TEK_SA_RESULT(* block_read_data)(tek_sa_data_client_handle dc, uint64_t request_id, TEK_SA_RESULT result, unsigned char buffer[], uint32_t buffer_length)`
Callback from the data client to the TEK signaling the next data chunk of the block transfer.
- `TEK_SA_RESULT(* block_write_data)(tek_sa_data_client_handle dc, uint64_t request_id, unsigned char buffer[], uint32_t buffer_length, uint32_t *bytes_written)`
Callback from the data client to the TEK requesting another chunk to write to the data client.
- `TEK_SA_RESULT(* block_write_result)(tek_sa_data_client_handle dc, uint64_t request_id, TEK_SA_RESULT result)`
Callback from the data client to the TEK with the final result of the block transfer.

9.3.1 Detailed Description

Interface of the Transformation Engine.

Interface exported by the TEK, which is given a data client plugin (dll/so) to interact with the TEK.

Definition at line 1440 of file [south_api.h](#).

9.3.2 Field Documentation

9.3.2.1 register_field

```
TEK_SA_RESULT(* tek_sa_transformation_engine::register_field) (tek_sa_data_client_handle dc,
const char *name, enum tek_sa_field_attributes attributes, enum tek_sa_variant_type type,
tek_sa_field_handle *new_field_handle)
```

Registers a new field of a data client with a name inside the TEK.

Parameters

| | |
|-------------------------|--|
| <i>dc</i> | The data client that registers at the TEK. |
| <i>name</i> | The name of the field. The data client decides the name. |
| <i>attributes</i> | The attributes of the field, e.g. is writeable. |
| <i>type</i> | The data type of the field. |
| <i>new_field_handle</i> | result of registration, only valid when method returns TEK_SA_ERR_SUCCESS. |

Returns

TEK_SA_ERR_SUCCESS or error code when registration failed (e.g. duplicate registration, empty name...).

Definition at line 1458 of file [south_api.h](#).

9.3.2.2 register_method

```
TEK_SA_RESULT(* tek_sa_transformation_engine::register_method) (tek_sa_data_client_handle
dc, const char *name, struct tek_sa_method_argument_description input_parameter[], uint32_t
number_of_input_parameters, struct tek_sa_method_argument_description output_parameter[],
uint32_t number_of_output_parameters, tek_sa_method_handle *new_method_handle)
```

Registers a new method at the TEK.

Parameters

| | |
|--|--|
| <i>dc</i> | The data client that registers at the TEK. |
| <i>name</i> | The name of the method. |
| tek_sa_method_argument_description | The description of the method input arguments. |
| <i>number_of_input_parameters</i> | The number of input parameters. |
| tek_sa_method_argument_description | The description of the method output arguments. |
| <i>number_of_output_parameters</i> | The number of output parameters. |
| <i>new_method_handle</i> | result of registration, only valid when method returns TEK_SA_ERR_SUCCESS. |

Returns

TEK_SA_ERR_SUCCESS or error code when registration failed (e.g. duplicate registration, empty name...).

Definition at line 1481 of file [south_api.h](#).

9.3.2.3 register_event

```
TEK_SA_RESULT(* tek_sa_transformation_engine::register_event) (tek_sa_data_client_handle dc,  
const char *name, tek_sa_event_handle *new_event_handle)
```

Registers a new Event that a data client might raise.

Parameters

| | |
|-------------------------|--|
| <i>dc</i> | The data client that registers at the TEK. |
| <i>name</i> | The name of the event. Must be unique within all events registered from this dc. |
| <i>new_event_handle</i> | result of registration, only valid when method returns TEK_SA_ERR_SUCCESS. |

Returns

TEK_SA_ERR_SUCCESS or error code when registration failed (e.g. duplicate registration, empty name...).

The TEK ensures that the set of handles between the predefined events and the registered events are disjoint.

Definition at line 1504 of file [south_api.h](#).

9.3.2.4 register_alarm

```
TEK_SA_RESULT(* tek_sa_transformation_engine::register_alarm) (tek_sa_data_client_handle dc,  
const char *name, const int16_t severity, const tek_sa_field_handle source, tek_sa_alarm_handle  
*new_alarm_handle)
```

Registers an alarm at the TEK.

Parameters

| | |
|-------------------------|--|
| <i>dc</i> | The data client that registers at the TEK. |
| <i>name</i> | The name of the new alarm, must be unique within all alarms registered for this data client. |
| <i>severity</i> | The alarm severity level. |
| <i>source</i> | field the alarm relates to, the same field can be used for multiple alarms. |
| <i>new_alarm_handle</i> | result of registration only valid when method returns TEK_SA_ERR_SUCCESS. |

Returns

TEK_SA_ERR_SUCCESS or error code when registration failed (e.g. duplicate registration, empty name...).

Definition at line 1523 of file [south_api.h](#).

9.3.2.5 register_enum_type

```
TEK_SA_RESULT(* tek_sa_transformation_engine::register_enum_type) (tek_sa_data_client_handle  
dc, struct tek_sa_enum_definition const *type_definition, tek_sa_type_handle *new_type_handle)
```

Register a user defined enum type.

Parameters

| | |
|--|--|
| <i>dc</i> | The data client that registers at the TEK. |
| tek_sa_enum_definition | The definition of the enumeration. |
| <i>result</i> | A tek_sa_type_handle associated to the registered enum. |
| <i>new_type_handle</i> | result of registration, only valid when method returns TEK_SA_ERR_SUCCESS. |

Returns

TEK_SA_ERR_SUCCESS or error code when registration failed (e.g. duplicate registration, empty name...).

Definition at line 1547 of file [south_api.h](#).

9.3.2.6 register_struct_type

```
TEK_SA_RESULT(* tek_sa_transformation_engine::register_struct_type) (tek_sa_data_client_handle  
dc, struct tek_sa_struct_definition const *type_definition, tek_sa_type_handle *new_type_handle)
```

Register a user defined struct type.

Parameters

| | |
|--|---|
| <i>dc</i> | The data client that registers at the TEK. |
| tek_sa_struct_definition | The definition of the struct. |
| <i>new_type_handle</i> | result of registration call when successful, only valid when method returns TEK_SA_ERR_SUCCESS. |

Returns

indicator whether the type definition was successfully registered

Definition at line 1561 of file [south_api.h](#).

9.3.2.7 post_event

```
TEK_SA_RESULT(* tek_sa_transformation_engine::post_event) (tek_sa_data_client_handle dc, struct  
tek_sa_dc_event const *event)
```

Post an event which was declared with a call to either [get_global_event](#) or [register_event](#).

Parameters

| | |
|--------------|---|
| <i>dc</i> | Handle of the data client which sends the event. |
| <i>event</i> | A event structure. See dc_event . |

Returns

indicator whether the event was successfully posted or not

Definition at line [1581](#) of file [south_api.h](#).

9.3.2.8 set_alarm

```
TEK_SA_RESULT(* tek_sa_transformation_engine::set_alarm) (tek_sa_data_client_handle dc, const  
tek_sa_alarm_handle alarm)
```

Sets an alarm.

Parameters

| | |
|--------------|--|
| <i>dc</i> | Handle of the data client that sets the alarm. |
| <i>alarm</i> | Handle of the alarm to be set. |

Returns

indicator whether setting the alarm was successful or not

Todo [C, TEAM] called by data_client after connect, regardless of "acknowledge" calls during previous connection?

Definition at line [1594](#) of file [south_api.h](#).

9.3.2.9 reset_alarm

```
TEK_SA_RESULT(* tek_sa_transformation_engine::reset_alarm) (tek_sa_data_client_handle dc,  
const tek_sa_alarm_handle alarm)
```

Clears/resets an alarm.

Parameters

| | |
|--------------|---|
| <i>dc</i> | Handle of the data client that clears/resets the alarm. |
| <i>alarm</i> | Handle of the alarm to be cleared/reset. |

Returns

indicator whether resetting the alarm was successful or not

Definition at line 1604 of file [south_api.h](#).

9.3.2.10 log

```
TEK_SA_RESULT(* tek_sa_transformation_engine::log) (tek_sa_data_client_handle source, enum  
tek_sa_log_level_t lvl, const char *format, va_list args)
```

Logging function for data clients.

The TEK bundles the messages of all data clients.

The TEK must be aware of data clients running in different threads than the TEK itself and is responsible for handling multi-threaded access to the function.

Parameters

| | |
|---------------------------|---|
| <i>data_client_handle</i> | The data client that logs a message. |
| <i>lvl</i> | The logging level. |
| <i>format</i> | The message format string. Format must be compatible to <code>printf</code> . |
| <i>args</i> | A <code>va_list</code> that contains all the arguments for the format string. |

Returns

log result status code; can be ignored normally or used for debugging.

Definition at line 1630 of file [south_api.h](#).

9.3.2.11 get_global_event

```
tek_sa_event_handle(* tek_sa_transformation_engine::get_global_event) (const char *name)
```

Get a handle of a globally defined event.

Parameters

| | |
|-------------|---------------------------------|
| <i>name</i> | name of globally defined event. |
|-------------|---------------------------------|

Returns

handle to globally defined event

Todo [C, TEAM] define the predefined events

[C, TEAM] define return value when event with given name does not exist?

The TEK ensures that the set of handles between the predefined events and the registered events are disjoint.

Definition at line 1648 of file [south_api.h](#).

9.3.2.12 update_capabilities

```
TEK_SA_RESULT(* tek_sa_transformation_engine::update_capabilities) (tek_sa_data_client_handle
dc, struct tek_sa_data_client_capabilities const *capabilities)
```

Notifies the TEK of the change of the client's capabilities.

Parameters

| | |
|--|--|
| <i>dc</i> | Handle of the data client that informs about the change of its capabilities. |
| <i>tek_sa_data_client_capabilities</i> | The updated client capabilities. |

Returns

(void)

Definition at line 1657 of file [south_api.h](#).

9.3.2.13 read_progress

```
TEK_SA_RESULT(* tek_sa_transformation_engine::read_progress) (tek_sa_data_client_handle dc,
uint64_t request_id, uint64_t progress)
```

Callback to signal progress of a read operation to the TEK.

Parameters

| | |
|-------------------|--|
| <i>dc</i> | Handle of the data client that is the source of the call |
| <i>request_id</i> | id of request to data client which triggered the call back |
| <i>progress</i> | ?? (percentage? why uint64?) |

Todo [B, TEAM] when should a data client report progress?

Todo [B, TEAM] when can the TEK stop the client (after progress was not reported)?

Definition at line 1679 of file [south_api.h](#).

9.3.2.14 read_result

```
TEK_SA_RESULT(* tek_sa_transformation_engine::read_result) (tek_sa_data_client_handle dc,
uint64_t request_id, TEK_SA_RESULT result, const struct tek_sa_read_result results[], uint32_t number_of_results)
```

Callback of the data client read operation.

Parameters

| | |
|--------------------------|---|
| <i>dc</i> | Handle of the data client that is the source of the call |
| <i>request_id</i> | id of request to data client that triggered the call back |
| <i>result</i> | status code for read request |
| <i>results</i> | read values |
| <i>number_of_results</i> | length of results array |

If the result is success, then the following constraints must hold:

The number of results MUST be equal to the number of fields requested in `read_fields`. The order of results MUST be the same as the order of fields in `read_fields`. The results array is only valid during the execution of the callback.

If the result is failure, the TEK MUST ignore the results and `number_of_results` parameters.

Definition at line 1704 of file [south_api.h](#).

9.3.2.15 notify_change

```
TEK_SA_RESULT(* tek_sa_transformation_engine::notify_change) (tek_sa_data_client_handle dc,
const struct tek_sa_read_result changes[], uint32_t number_of_changes)
```

Callback to notify about a change of subscribed data fields.

Parameters

| | |
|--------------------------|--|
| <i>dc</i> | Handle of the data client that is the source of the change |
| <i>changes</i> | changed field values |
| <i>number_of_changes</i> | length of changes array |

Definition at line 1717 of file [south_api.h](#).

9.3.2.16 write_result

```
TEK_SA_RESULT(* tek_sa_transformation_engine::write_result) (tek_sa_data_client_handle dc,
uint64_t request_id, TEK_SA_RESULT result, const struct tek_sa_write_result results[], uint32_t number_of_results)
```

Callback of the data client write operation.

Parameters

| | |
|--------------------------|---|
| <i>dc</i> | Handle of the data client data was written to |
| <i>request_id</i> | id of write request to data client that triggered the call back |
| <i>result</i> | overall result of write operation |
| <i>results</i> | write results for each written field |
| <i>number_of_results</i> | length of results array |

Definition at line 1731 of file [south_api.h](#).

9.3.2.17 call_method_result

```
TEK_SA_RESULT(* tek_sa_transformation_engine::call_method_result) (tek_sa_data_client_handle dc,
uint64_t request_id, TEK_SA_RESULT result, const tek_sa_field_value results[], uint32_t number_of_results)
```

Callback of a data client method call.

Parameters

| | |
|--------------------------|---|
| <i>dc</i> | Handle of the data client a method was called at |
| <i>request_id</i> | id of method call request to data client that triggered the call back |
| <i>result</i> | error/success indicator of method call |
| <i>results</i> | return values of method call, only valid for successful results |
| <i>number_of_results</i> | length of results array |

Definition at line 1748 of file [south_api.h](#).

9.3.2.18 block_read_data

```
TEK_SA_RESULT(* tek_sa_transformation_engine::block_read_data) (tek_sa_data_client_handle dc,
uint64_t request_id, TEK_SA_RESULT result, unsigned char buffer[], uint32_t buffer_length)
```

Callback from the data client to the TEK signaling the next data chunk of the block transfer.

Parameters

| | |
|-----------|-------------------------|
| <i>dc</i> | The data client handle. |
|-----------|-------------------------|

Parameters

| | |
|----------------------|---|
| <i>request_id</i> | The request id of the block transfer. |
| <i>result</i> | The data client signals success, error, or end-of-file. Buffer may contain a last chunk when end-of-file is signalled. If an error is signalled, the data client has aborted the process and will not call this callback again for the request. |
| <i>buffer</i> | The current chunk of the file. The TEK must copy the data into it's own process. |
| <i>buffer_length</i> | The length of the chunk. |

Returns

The TEK responds with success, or can abort the transfer.

Definition at line 1770 of file [south_api.h](#).

9.3.2.19 block_write_data

```
TEK_SA_RESULT(* tek_sa_transformation_engine::block_write_data) (tek_sa_data_client_handle dc,  
uint64_t request_id, unsigned char buffer[], uint32_t buffer_length, uint32_t *bytes_written)
```

Callback from the data client to the TEK requesting another chunk to write to the data client.

Parameters

| | |
|----------------------|--|
| <i>dc</i> | The data client handle. |
| <i>request_id</i> | The request id of the block transfer. |
| <i>buffer</i> | The buffer to write the chunk of the file. The TEK must copy the data into the buffer provided by the data client. |
| <i>buffer_length</i> | The length of the buffer in the data client. |
| <i>bytes_written</i> | The number of bytes written in the buffer by the TEK. |
| <i>result</i> | Signals valid next chunk, end-of-file, abort or error. |

Returns

Success or failure code.

Definition at line 1790 of file [south_api.h](#).

9.3.2.20 block_write_result

```
TEK_SA_RESULT(* tek_sa_transformation_engine::block_write_result) (tek_sa_data_client_handle  
dc, uint64_t request_id, TEK_SA_RESULT result)
```

Callback from the data client to the TEK with the final result of the block transfer.

Parameters

| | |
|-------------------------|---------------------------------------|
| <i>dc</i> | The data client handle. |
| <i>request↔ _id</i> | The request id of the block transfer. |
| <i>result</i> | The final result. |

Definition at line 1804 of file [south_api.h](#).

The documentation for this struct was generated from the following file:

- include/[south_api.h](#)

Chapter 10

File Documentation

10.1 include/south_api.h File Reference

Definition of the interface between Data Clients (DC) and the Transformation Engine (TEK)

```
#include <stdarg.h>
#include <stdbool.h>
#include <stddef.h>
#include <stdint.h>
#include <stdlib.h>
```

Data Structures

- struct [tek_sa_additional_file](#)
Configuration class which describes an additional file which is passed to the data client. [More...](#)
- struct [tek_sa_data_client_configuration](#)
Configuration object containing the contents of the configuration files for the [tek_sa_data_client_plugin](#) or [tek_sa_data_client](#) instances. [More...](#)
- struct [tek_sa_configuration](#)
Configuration struct that contains generic properties and settings for TEK instance. [More...](#)
- struct [tek_sa_guid](#)
The representation of a GUID when used as a field type. [More...](#)
- struct [tek_sa_byte_string](#)
The representation of a byte array with variable length when used as a field type. [More...](#)
- struct [tek_sa_string](#)
The representation of a string with variable length when used as a field type. [More...](#)
- struct [tek_sa_complex_data](#)
The representation of a field value which has a type which is not a predefined type. [More...](#)
- struct [tek_sa_complex_data_array_item](#)
The representation of the items of an array of complex data values with exactly one dimension. [More...](#)
- struct [tek_sa_complex_data_array](#)
The representation of an array of complex data with exactly one dimension. [More...](#)
- struct [tek_sa_complex_data_matrix](#)
The representation of array of complex data with more than one dimension. [More...](#)
- struct [tek_sa_variant_array](#)

- The representation of a one dimensional array of the supported base types. [More...](#)*

 - struct [tek_sa_variant_matrix](#)
- The representation of an array with more than one dimension of the supported base types. [More...](#)*

 - struct [tek_sa_variant](#)
- The representation of a single value (which may be of array type too). [More...](#)*

 - struct [tek_sa_struct_field_type_definition](#)
- The type definition of a record field in a user defined struct type. [More...](#)*

 - struct [tek_sa_struct_definition](#)
- The type definition of a user defined record type. [More...](#)*

 - struct [tek_sa_enum_item_definition](#)
- The definition of an enum item which is defined in a user defined enum type. [More...](#)*

 - struct [tek_sa_enum_definition](#)
- The type definition of a user defined enum type. [More...](#)*

 - struct [tek_sa_method_argument_description](#)
- The description of a method parameter. [More...](#)*

 - struct [tek_sa_field_write_request](#)
- Structure to encapsulate the parameters of a write field request. [More...](#)*

 - struct [tek_sa_write_result](#)
- Structure to encapsulate the result of a write field request. [More...](#)*

 - struct [tek_sa_read_result](#)
- Structure to encapsulate the result of a read operation of a single field. [More...](#)*

 - struct [tek_sa_event_parameter](#)
- Structure to encapsulate an event parameter. [More...](#)*

 - struct [tek_sa_dc_event](#)
- An event which may be sent from the data client to [tek_sa_transformation_engine::post_event](#). [More...](#)*

 - struct [tek_sa_data_client_capabilities](#)
- capabilities of the data client. These capabilities are applied to the complete data client as well as to each instance (device connection). [More...](#)*

 - struct [tek_sa_data_client](#)
- The interface of one instance of a data client.*

 - struct [tek_sa_data_client_plugin](#)
- Interface of the data client plugin.*

 - struct [tek_sa_transformation_engine](#)
- Interface of the Transformation Engine.*

 - union [tek_sa_variant_array.data](#)
- The array values. [More...](#)*

 - union [tek_sa_variant.data](#)
- The value. [More...](#)*

Macros

- #define [TEK_SA_API_VERSION_MAJOR](#) 0
 - #define [TEK_SA_API_VERSION_MINOR](#) 1
 - #define [TEK_SA_API_VERSION_PATCH](#) 0
 - #define [TEK_SA_API_VERSION](#) "0.1.0"
 - #define [TEK_SA_ERR_UNSPECIFIED](#) 1000
- unspecified error to be used when no more specific error is available.*

Typedefs

- typedef void * [tek_sa_data_client_handle](#)
The type of the data client handle.
- typedef int64_t [tek_sa_type_handle](#)
The type of a handle which is returned for user defined types.
- typedef int64_t [tek_sa_type_handle_or_type_enum](#)
The type for a reference handle which references either a user defined type (see [tek_sa_type_handle](#)) or a predefined type (See [tek_sa_variant_type](#).)
- typedef int64_t [tek_sa_datetime](#)
The type of date and time values wen used as a field type.
- typedef struct [tek_sa_variant](#) [tek_sa_field_value](#)
Type of data client field values.
- typedef uint32_t [tek_sa_field_handle](#)
Handle type for a field definition.
- typedef uint32_t [tek_sa_event_handle](#)
Handle type for an event definition.
- typedef uint32_t [tek_sa_alarm_handle](#)
Handle type for an alarm definition.
- typedef uint32_t [tek_sa_method_handle](#)
Handle type for a method definition.
- typedef [TEK_SA_RESULT](#)(* [tek_sa_load_plugin_fn](#)) (struct [tek_sa_transformation_engine](#) *api, const struct [tek_sa_data_client_configuration](#) *plugin_configuration, struct [tek_sa_data_client_plugin](#) *plugin, struct [tek_sa_configuration](#) *tek_configuration)
Signature for the load plugin function.

Enumerations

- enum [tek_sa_variant_type](#) {
[TEK_SA_VARIANT_TYPE_NULL](#) = 0x0 , [TEK_SA_VARIANT_TYPE_BOOL](#) = 0x1 , [TEK_SA_VARIANT_TYPE_UINT8_T](#) = 0x2 , [TEK_SA_VARIANT_TYPE_INT8_T](#) = 0x3 ,
[TEK_SA_VARIANT_TYPE_UINT16_T](#) = 0x4 , [TEK_SA_VARIANT_TYPE_INT16_T](#) = 0x5 , [TEK_SA_VARIANT_TYPE_UINT32_T](#) = 0x6 , [TEK_SA_VARIANT_TYPE_INT32_T](#) = 0x7 ,
[TEK_SA_VARIANT_TYPE_UINT64_T](#) = 0x8 , [TEK_SA_VARIANT_TYPE_INT64_T](#) = 0x9 , [TEK_SA_VARIANT_TYPE_FLOAT](#) = 0xa , [TEK_SA_VARIANT_TYPE_DOUBLE](#) = 0xb ,
[TEK_SA_VARIANT_TYPE_DATETIME](#) = 0xc , [TEK_SA_VARIANT_TYPE_STRING](#) = 0xd , [TEK_SA_VARIANT_TYPE_GUID](#) = 0xe , [TEK_SA_VARIANT_TYPE_BYTE_STRING](#) = 0xf ,
[TEK_SA_VARIANT_TYPE_COMPLEX](#) = 0x20 , [TEK_SA_VARIANT_TYPE_FLAG_ARRAY](#) = 0x40 ,
[TEK_SA_VARIANT_TYPE_FLAG_MATRIX](#) = 0x80 }
The predefined types which can be processed in the TE.
- enum [tek_sa_field_attributes](#) { [TEK_SA_FIELD_ATTRIBUTES_WRITABLE](#) = 0x1 , [TEK_SA_FIELD_ATTRIBUTES_READABLE](#) = 0x2 , [TEK_SA_FIELD_ATTRIBUTES_SUBSCRIBABLE](#) = 0x4 }
Flags type which contains the attributes of a data client field.
- enum [tek_sa_log_level_t](#) {
[TEK_SA_LOG_LEVEL_TRACE](#) = 0x0 , [TEK_SA_LOG_LEVEL_DEBUG](#) = 0x1 , [TEK_SA_LOG_LEVEL_INFO](#) = 0x2 , [TEK_SA_LOG_LEVEL_WARNING](#) = 0x3 ,
[TEK_SA_LOG_LEVEL_ERROR](#) = 0x4 , [TEK_SA_LOG_LEVEL_CRITICAL](#) = 0x5 }
Definition of the possible logging levels which can be used in [tek_sa_transformation_engine::log](#).
- enum [tek_sa_threading_model](#) { [TEK_SA_THREADING_MODEL_SAME_THREAD](#) = 0x0 , [TEK_SA_THREADING_MODEL_S](#) = 0x1 , [TEK_SA_THREADING_MODEL_PARALLEL](#) = 0x2 }
Describes the threading model of a data client instance of a data client plugin.

StatusCodes

- `#define TEK_SA_ERR_SUCCESS 0`
An operation was completed successfully.
- `#define TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE 10`
A data client function was called in an asynchronous manner while the implementation can not use multiple threads.
- `#define TEK_SA_ERR_OUT_OF_MEMORY 11`
The data client or the Transformation Engine can not process a request because it has no more system resources.
- `#define TEK_SA_ERR_INVALID_PARAMETER 12`
The parameters passed to the function are invalid.
- `#define TEK_SA_ERR_RETRY_LATER 0xffffffff`
A data client function was called in an asynchronous manner while the number of inflight calls is already active.
- `#define TEK_SA_READ_RESULT_STATUS_OK 0`
A read operation completed successfully.
- `#define TEK_SA_READ_RESULT_STATUS_NOK 1`
A read operation failed.
- `#define TEK_SA_READ_RESULT_STATUS_TIMEOUT 2`
A read operation did not complete within the specified time limit.
- `#define TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE 3`
The read operation failed because the passed field handle was invalid.
- `#define TEK_SA_BLOCK_TRANSFER_END_OF_FILE 26`
The read operation read until the end of file.
- `#define TEK_SA_BLOCK_TRANSFER_ABORT 24`
The block read or write operation should be stopped.
- `typedef int TEK_SA_RESULT`
The return value type of all interface functions (which need to return information about success of the operation).

10.1.1 Detailed Description

Definition of the interface between Data Clients (DC) and the Transformation Engine (TEK)

This header file conforms to the following standards:

- ISO/IEC 9899:1990 (C90)
- ISO/IEC 14882:1998 (C++98)

To ensure binary compatibility of the interface between different compilers and different versions of the interface, the struct offset of each struct member is verified at compile time. This check is realized by the `TEK_SA_VERIFY↵_STRUCT_OFFSET` macro.

Definition in file [south_api.h](#).

10.1.2 Macro Definition Documentation

10.1.2.1 TEK_SA_API_VERSION_MAJOR

```
#define TEK_SA_API_VERSION_MAJOR 0
```

Definition at line 19 of file [south_api.h](#).

10.1.2.2 TEK_SA_API_VERSION_MINOR

```
#define TEK_SA_API_VERSION_MINOR 1
```

Definition at line 20 of file [south_api.h](#).

10.1.2.3 TEK_SA_API_VERSION_PATCH

```
#define TEK_SA_API_VERSION_PATCH 0
```

Definition at line 21 of file [south_api.h](#).

10.1.2.4 TEK_SA_API_VERSION

```
#define TEK_SA_API_VERSION "0.1.0"
```

Definition at line 22 of file [south_api.h](#).

10.2 south_api.h

[Go to the documentation of this file.](#)

```
00001 #ifndef TEK_SOUTH_API_H
00002 #define TEK_SOUTH_API_H
00003
00019 #define TEK_SA_API_VERSION_MAJOR 0
00020 #define TEK_SA_API_VERSION_MINOR 1
00021 #define TEK_SA_API_VERSION_PATCH 0
00022 #define TEK_SA_API_VERSION "0.1.0"
00023
00024 #include <stdarg.h>
00025 #include <stdbool.h>
00026 #include <stddef.h>
00027 #include <stdint.h>
00028 #include <stdlib.h>
00029
00030 #define TEK_SA_STRUCT_ALIGN_SELECT(O32, O64) (sizeof(void*) == 8 ? O64 : O32)
00031
00032 #if defined __STDC_VERSION__ && __STDC_VERSION__ >= 201112L
00033 #include <assert.h>
00034 #define TEK_SA_VERIFY_STRUCT_OFFSET(S, M, O32, O64)
00035 ;
00036 _Static_assert(offsetof(struct S, M) == TEK_SA_STRUCT_ALIGN_SELECT(O32, O64),
00037 "struct offset of field " #M " in " #S " must be correct")
00038 #else
00039 #define TEK_SA_VERIFY_STRUCT_OFFSET(S, M, O32, O64)
00040 ;
00041 enum {
```

```

00042     S##_M##_offset =
00043     1 / (int) (offsetof(struct S, M) == TEK_SA_STRUCT_ALIGN_SELECT(032, 064)) \
00044     };
00045 #endif
00046
00047 #ifdef __cplusplus
00048 extern "C" {
00049 #endif
00050
00235 typedef void* tek_sa_data_client_handle;
00236
00237 /*****
00238  * Configuration structures
00239  *****/
00240
00245 struct tek_sa_additional_file {
00247     char* name;
00248
00250     char* content;
00251 };
00252
00253 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_additional_file, name, 0, 0);
00254 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_additional_file, content, 4, 8);
00255
00260 struct tek_sa_data_client_configuration {
00262     char* config;
00263
00265     struct tek_sa_additional_file* additional_files;
00266
00268     uint32_t additional_files_count;
00269 };
00270
00271 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_configuration, config, 0, 0);
00272 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_configuration, additional_files, 4, 8);
00273 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_configuration, additional_files_count, 8, 16);
00274
00278 struct tek_sa_configuration {
00281     uint32_t request_timeout_ms;
00282 };
00283
00284 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_configuration, request_timeout_ms, 0, 0);
00285
00286 /*****
00287  * Built-in type definitions and variant
00288  *****/
00289
00298 typedef int64_t tek_sa_type_handle;
00299
00304 typedef int64_t tek_sa_type_handle_or_type_enum;
00305
00310 struct tek_sa_guid {
00312     uint32_t data1;
00313
00315     uint16_t data2;
00316
00318     uint16_t data3;
00319
00321     uint8_t data4[8];
00322 };
00323 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_guid, data1, 0, 0);
00324 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_guid, data2, 4, 4);
00325 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_guid, data3, 6, 6);
00326 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_guid, data4, 8, 8);
00327
00335 struct tek_sa_byte_string {
00337     int32_t length;
00338
00340     unsigned char* data;
00341 };
00342 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_byte_string, length, 0, 0);
00343 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_byte_string, data, 4, 8);
00344
00353 struct tek_sa_string {
00355     int32_t length;
00356
00358     unsigned char* data;
00359 };
00360 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_string, length, 0, 0);
00361 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_string, data, 4, 8);
00362
00369 typedef int64_t tek_sa_datetime;
00370
00378 struct tek_sa_complex_data {
00380     tek_sa_type_handle type;
00381
00388     uint32_t data_length;
00389

```

```

00396 unsigned char* data;
00397 };
00398 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data, type, 0, 0);
00399 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data, data_length, 8, 8);
00400 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data, data, 12, 16);
00401
00408 struct tek_sa_complex_data_array_item {
00416     uint32_t data_length;
00417
00423     unsigned char* data;
00424 };
00425 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_array_item, data_length, 0, 0);
00426 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_array_item, data, 4, 8);
00427
00434 struct tek_sa_complex_data_array {
00436     tek_sa_type_handle type;
00437
00439     uint32_t number_of_items;
00440
00443     struct tek_sa_complex_data_array_item* data;
00444 };
00445
00446 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_array, type, 0, 0);
00447 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_array, number_of_items, 8, 8);
00448 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_array, data, 12, 16);
00449
00456 struct tek_sa_complex_data_matrix {
00458     tek_sa_type_handle type;
00459
00466     uint32_t dimension_length;
00467
00482     uint32_t* dimensions;
00483
00486     struct tek_sa_complex_data_array_item* data;
00487 };
00488 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_matrix, type, 0, 0);
00489 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_matrix, dimension_length, 8, 8);
00490 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_matrix, dimensions, 12, 16);
00491 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_complex_data_matrix, data, 16, 24);
00492
00500 enum tek_sa_variant_type {
00502     TEK_SA_VARIANT_TYPE_NULL = 0x0,
00503
00505     TEK_SA_VARIANT_TYPE_BOOL = 0x1,
00506
00508     TEK_SA_VARIANT_TYPE_UINT8_T = 0x2,
00509
00511     TEK_SA_VARIANT_TYPE_INT8_T = 0x3,
00512
00514     TEK_SA_VARIANT_TYPE_UINT16_T = 0x4,
00515
00517     TEK_SA_VARIANT_TYPE_INT16_T = 0x5,
00518
00520     TEK_SA_VARIANT_TYPE_UINT32_T = 0x6,
00521
00523     TEK_SA_VARIANT_TYPE_INT32_T = 0x7,
00524
00526     TEK_SA_VARIANT_TYPE_UINT64_T = 0x8,
00527
00529     TEK_SA_VARIANT_TYPE_INT64_T = 0x9,
00530
00532     TEK_SA_VARIANT_TYPE_FLOAT = 0xa,
00533
00535     TEK_SA_VARIANT_TYPE_DOUBLE = 0xb,
00536
00538     TEK_SA_VARIANT_TYPE_DATETIME = 0xc,
00539
00541     TEK_SA_VARIANT_TYPE_STRING = 0xd,
00542
00544     TEK_SA_VARIANT_TYPE_GUID = 0xe,
00545
00547     TEK_SA_VARIANT_TYPE_BYTE_STRING = 0xf,
00548
00551     TEK_SA_VARIANT_TYPE_COMPLEX = 0x20,
00552
00555     TEK_SA_VARIANT_TYPE_FLAG_ARRAY = 0x40,
00556
00559     TEK_SA_VARIANT_TYPE_FLAG_MATRIX = 0x80
00560 };
00561
00564 struct tek_sa_variant_array {
00566     uint32_t length;
00567
00569     union {
00570         bool* b;
00571         uint8_t* ui8;
00572         int8_t* i8;

```

```

00573     uint16_t* ui16;
00574     int16_t* i16;
00575     uint32_t* ui32;
00576     int32_t* i32;
00577     uint64_t* ui64;
00578     int64_t* i64;
00579     float* f;
00580     double* d;
00581     tek_sa_datetime* dt;
00582     struct tek_sa_string* s;
00583     struct tek_sa_guid* guid;
00584     struct tek_sa_byte_string* bs;
00585 } data;
00586 };
00587 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_variant_array, length, 0, 0);
00588 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_variant_array, data, 4, 8);
00589
00592 struct tek_sa_variant_matrix {
00594     uint32_t dimension_length;
00595
00609     uint32_t* dimensions;
00610
00612     struct tek_sa_variant_array data;
00613 };
00614 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_variant_matrix, dimension_length, 0, 0);
00615 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_variant_matrix, dimensions, 4, 8);
00616
00624 struct tek_sa_variant {
00630     uint8_t type;
00631
00633     union {
00634         bool b;
00635         uint8_t ui8;
00636         int8_t i8;
00637         uint16_t ui16;
00638         int16_t i16;
00639         uint32_t ui32;
00640         int32_t i32;
00641         uint64_t ui64;
00642         int64_t i64;
00643         float f;
00644         double d;
00645         tek_sa_datetime dt;
00646         struct tek_sa_string s;
00647         struct tek_sa_guid guid;
00648         struct tek_sa_byte_string bs;
00649         struct tek_sa_variant_array array;
00650         struct tek_sa_variant_matrix matrix;
00651         struct tek_sa_complex_data complex;
00652         struct tek_sa_complex_data_array complex_array;
00653         struct tek_sa_complex_data_matrix complex_matrix;
00654     } data;
00655 };
00656 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_variant, type, 0, 0);
00657 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_variant, data, 8, 8);
00658
00660 typedef struct tek_sa_variant tek_sa_field_value;
00661
00662 /*****
00663  * Type definitions from data client to TEK
00664  *****/
00665
00669 struct tek_sa_struct_field_type_definition {
00671     char* name;
00672
00674     tek_sa_type_handle_or_type_enum type;
00675 };
00676 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_struct_field_type_definition, name, 0, 0);
00677 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_struct_field_type_definition, type, 8, 8);
00678
00682 struct tek_sa_struct_definition {
00684     char* name;
00685
00687     struct tek_sa_struct_field_type_definition* items;
00688
00690     uint32_t item_count;
00691 };
00692 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_struct_definition, name, 0, 0);
00693 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_struct_definition, items, 4, 8);
00694 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_struct_definition, item_count, 8, 16);
00695
00700 struct tek_sa_enum_item_definition {
00702     char* name;
00703
00705     int32_t value;
00706 };
00707 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_enum_item_definition, name, 0, 0);

```



```

00708 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_enum_item_definition, value, 4, 8);
00709
00713 struct tek_sa_enum_definition {
00715     char* name;
00716
00718     struct tek_sa_enum_item_definition* items;
00719
00721     uint32_t item_count;
00722 };
00723 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_enum_definition, name, 0, 0);
00724 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_enum_definition, items, 4, 8);
00725 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_enum_definition, item_count, 8, 16);
00726
00732 struct tek_sa_method_argument_description {
00734     char const* name;
00735
00737     enum tek_sa_variant_type type;
00738 };
00739 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_method_argument_description, name, 0, 0);
00740 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_method_argument_description, type, 4, 8);
00741
00742 /*****
00743  * Handles and structures for data exchange
00744  *****/
00745
00747 enum tek_sa_field_attributes {
00749     TEK_SA_FIELD_ATTRIBUTES_WRITABLE = 0x1,
00750
00752     TEK_SA_FIELD_ATTRIBUTES_READABLE = 0x2,
00753
00755     TEK_SA_FIELD_ATTRIBUTES_SUBSCRIBABLE = 0x4,
00756 };
00757
00759 typedef uint32_t tek_sa_field_handle;
00760
00762 typedef uint32_t tek_sa_event_handle;
00763
00765 typedef uint32_t tek_sa_alarm_handle;
00766
00768 typedef uint32_t tek_sa_method_handle;
00769
00781 typedef int TEK_SA_RESULT;
00782
00784 #define TEK_SA_ERR_SUCCESS 0
00785
00795 #define TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE 10
00796
00801 #define TEK_SA_ERR_OUT_OF_MEMORY 11
00802
00804 #define TEK_SA_ERR_INVALID_PARAMETER 12
00805
00816 #define TEK_SA_ERR_RETRY_LATER 0xffffffff
00817
00819 #define TEK_SA_READ_RESULT_STATUS_OK 0
00820
00822 #define TEK_SA_READ_RESULT_STATUS_NOK 1
00823
00825 #define TEK_SA_READ_RESULT_STATUS_TIMEOUT 2
00826
00829 #define TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE 3
00830
00837 #define TEK_SA_BLOCK_TRANSFER_END_OF_FILE 26
00838
00846 #define TEK_SA_BLOCK_TRANSFER_ABORT 24
00852 #define TEK_SA_ERR_UNSPECIFIED 1000
00853
00854 /*****
00855  * Request and response structures
00856  *****/
00857
00859 struct tek_sa_field_write_request {
00862     tek_sa_field_handle handle;
00863
00865     tek_sa_field_value value;
00866 };
00867 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_field_write_request, handle, 0, 0);
00868 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_field_write_request, value, 8, 8);
00869
00871 struct tek_sa_write_result {
00873     TEK_SA_RESULT status;
00874
00876     tek_sa_field_handle handle;
00877 };
00878 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_write_result, status, 0, 0);
00879 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_write_result, handle, 4, 4);
00880
00883 struct tek_sa_read_result {

```

```

00885     TEK_SA_RESULT status;
00886
00888     tek_sa_field_handle handle;
00889
00896     tek_sa_field_value value;
00897 };
00898 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_read_result, status, 0, 0);
00899 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_read_result, handle, 4, 4);
00900 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_read_result, value, 8, 8);
00901
00903 struct tek_sa_event_parameter {
00905     char const* name;
00906
00908     tek_sa_field_value value;
00909 };
00910 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_event_parameter, name, 0, 0);
00911 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_event_parameter, value, 8, 8);
00912
00915 struct tek_sa_dc_event {
00922     tek_sa_datetime timestamp;
00923
00938     int16_t severity;
00939
00949     tek_sa_event_handle event_type;
00950
00959     tek_sa_field_handle source;
00960
00962     uint32_t number_of_parameters;
00963
00965     struct tek_sa_event_parameter* parameters;
00966 };
00967 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_dc_event, timestamp, 0, 0);
00968 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_dc_event, severity, 8, 8);
00969 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_dc_event, event_type, 12, 12);
00970 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_dc_event, source, 16, 16);
00971 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_dc_event, number_of_parameters, 20, 20);
00972 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_dc_event, parameters, 24, 24);
00973
00978 enum tek_sa_log_level_t {
00979     TEK_SA_LOG_LEVEL_TRACE = 0x0,
00980     TEK_SA_LOG_LEVEL_DEBUG = 0x1,
00981     TEK_SA_LOG_LEVEL_INFO = 0x2,
00982     TEK_SA_LOG_LEVEL_WARNING = 0x3,
00983     TEK_SA_LOG_LEVEL_ERROR = 0x4,
00984     TEK_SA_LOG_LEVEL_CRITICAL = 0x5,
00985 };
00986
00993 /*****
00994  * Data client capabilities
00995  *****/
00996
01001 enum tek_sa_threading_model {
01006     TEK_SA_THREADING_MODEL_SAME_THREAD = 0x0,
01007
01012     TEK_SA_THREADING_MODEL_SEQUENTIAL = 0x1,
01013
01020     TEK_SA_THREADING_MODEL_PARALLEL = 0x2,
01021 };
01022
01031 struct tek_sa_data_client_capabilities {
01041     uint32_t number_of_inflight_calls;
01042
01047     enum tek_sa_threading_model threading_model;
01048 };
01049 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_capabilities, number_of_inflight_calls, 0, 0);
01050 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_capabilities, threading_model, 4, 4);
01051
01057 struct tek_sa_data_client {
01075     TEK_SA_RESULT (*register_features)(tek_sa_data_client_handle dc);
01076
01089     TEK_SA_RESULT (*connect)(tek_sa_data_client_handle dc);
01090
01096     void (*free)(tek_sa_data_client_handle dc);
01097
01194     TEK_SA_RESULT (*read_fields)(tek_sa_data_client_handle dc,
01195                                 uint64_t request_id,
01196                                 const tek_sa_field_handle items_to_read[],
01197                                 uint32_t number_of_items,
01198                                 bool do_not_block);
01199
01218     TEK_SA_RESULT (*write_fields)(tek_sa_data_client_handle dc,
01219                                  uint64_t request_id,
01220                                  const struct tek_sa_field_write_request items_to_write[],
01221                                  uint32_t number_of_items,
01222                                  bool do_not_block);
01223
01245     TEK_SA_RESULT (*block_read)(const tek_sa_data_client_handle dc,

```

```

01246         uint64_t request_id,
01247         const char* filepath,
01248         uint64_t offset,
01249         int64_t length,
01250         bool do_not_block,
01251         int64_t* filesize);
01252
01272 TEK_SA_RESULT (*block_write)(const tek_sa_data_client_handle dc,
01273                               uint64_t request_id,
01274                               const char* filepath,
01275                               uint64_t offset,
01276                               int64_t length,
01277                               bool do_not_block);
01278
01296 TEK_SA_RESULT (*subscribe)(tek_sa_data_client_handle dc,
01297                             const tek_sa_field_handle items_to_subscribe[],
01298                             uint32_t number_of_items);
01299
01310 TEK_SA_RESULT (*unsubscribe)(tek_sa_data_client_handle dc,
01311                              const tek_sa_field_handle items_to_unsubscribe[],
01312                              uint32_t number_of_items);
01313
01337 TEK_SA_RESULT (*invoke)(const tek_sa_data_client_handle dc,
01338                          const tek_sa_method_handle method,
01339                          uint64_t request_id,
01340                          const tek_sa_field_value parameters[],
01341                          const uint32_t number_of_parameters);
01342
01358 TEK_SA_RESULT (*acknowledge_alarm)(tek_sa_data_client_handle dc, const tek_sa_alarm_handle alarm);
01359
01369 tek_sa_data_client_handle handle;
01370
01372 };
01373 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, register_features, 0, 0);
01374 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, connect, 4, 8);
01375 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, free, 8, 16);
01376 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, read_fields, 12, 24);
01377 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, write_fields, 16, 32);
01378 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, block_read, 20, 40);
01379 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, block_write, 24, 48);
01380 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, subscribe, 28, 56);
01381 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, unsubscribe, 32, 64);
01382 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, invoke, 36, 72);
01383 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, acknowledge_alarm, 40, 80);
01384 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client, handle, 44, 88);
01385
01393 struct tek_sa_data_client_plugin {
01394     void* plugin_context;
01395
01416 TEK_SA_RESULT (*data_client_new)(void* plugin_context,
01417                                   const struct tek_sa_data_client_configuration* config,
01418                                   struct tek_sa_data_client* created_client,
01419                                   struct tek_sa_data_client_capabilities* capabilities);
01420
01424     void (*free_context)(void* plugin_context);
01425 };
01426 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_plugin, plugin_context, 0, 0);
01427 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_plugin, data_client_new, 4, 8);
01428 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_data_client_plugin, free_context, 8, 16);
01429
01440 struct tek_sa_transformation_engine {
01458 TEK_SA_RESULT (*register_field)(tek_sa_data_client_handle dc,
01459                                 const char* name,
01460                                 enum tek_sa_field_attributes attributes,
01461                                 enum tek_sa_variant_type type,
01462                                 tek_sa_field_handle* new_field_handle);
01463
01481 TEK_SA_RESULT (*register_method)(tek_sa_data_client_handle dc,
01482                                  const char* name,
01483                                  struct tek_sa_method_argument_description input_parameter[],
01484                                  uint32_t number_of_input_parameters,
01485                                  struct tek_sa_method_argument_description output_parameter[],
01486                                  uint32_t number_of_output_parameters,
01487                                  tek_sa_method_handle* new_method_handle);
01488
01504 TEK_SA_RESULT (*register_event)(tek_sa_data_client_handle dc,
01505                                 const char* name,
01506                                 tek_sa_event_handle* new_event_handle);
01507
01523 TEK_SA_RESULT (*register_alarm)(tek_sa_data_client_handle dc,
01524                                 const char* name,
01525                                 const int16_t severity,
01526                                 const tek_sa_field_handle source,
01527                                 tek_sa_alarm_handle* new_alarm_handle);
01528
01547 TEK_SA_RESULT (*register_enum_type)(tek_sa_data_client_handle dc,
01548                                     struct tek_sa_enum_definition const* type_definition,

```

```

01549         tek_sa_type_handle* new_type_handle);
01550
01561     TEK_SA_RESULT (*register_struct_type)(tek_sa_data_client_handle dc,
01562         struct tek_sa_struct_definition const* type_definition,
01563         tek_sa_type_handle* new_type_handle);
01564
01581     TEK_SA_RESULT (*post_event)(tek_sa_data_client_handle dc, struct tek_sa_dc_event const* event);
01582
01594     TEK_SA_RESULT (*set_alarm)(tek_sa_data_client_handle dc, const tek_sa_alarm_handle alarm);
01595
01604     TEK_SA_RESULT (*reset_alarm)(tek_sa_data_client_handle dc, const tek_sa_alarm_handle alarm);
01605
01630     TEK_SA_RESULT (*log)(tek_sa_data_client_handle source,
01631         enum tek_sa_log_level_t lvl,
01632         const char* format,
01633         va_list args);
01634
01648     tek_sa_event_handle (*get_global_event)(const char* name);
01649
01657     TEK_SA_RESULT (*update_capabilities)(tek_sa_data_client_handle dc,
01658         struct tek_sa_data_client_capabilities const* capabilities);
01659
01679     TEK_SA_RESULT (*read_progress)(tek_sa_data_client_handle dc,
01680         uint64_t request_id,
01681         uint64_t progress);
01682
01704     TEK_SA_RESULT (*read_result)(tek_sa_data_client_handle dc,
01705         uint64_t request_id,
01706         TEK_SA_RESULT result,
01707         const struct tek_sa_read_result results[],
01708         uint32_t number_of_results);
01709
01717     TEK_SA_RESULT (*notify_change)(tek_sa_data_client_handle dc,
01718         const struct tek_sa_read_result changes[],
01719         uint32_t number_of_changes);
01720
01731     TEK_SA_RESULT (*write_result)(tek_sa_data_client_handle dc,
01732         uint64_t request_id,
01733         TEK_SA_RESULT result,
01734         const struct tek_sa_write_result results[],
01735         uint32_t number_of_results);
01736
01748     TEK_SA_RESULT (*call_method_result)(tek_sa_data_client_handle dc,
01749         uint64_t request_id,
01750         TEK_SA_RESULT result,
01751         const tek_sa_field_value results[],
01752         uint32_t number_of_results);
01753
01770     TEK_SA_RESULT (*block_read_data)(tek_sa_data_client_handle dc,
01771         uint64_t request_id,
01772         TEK_SA_RESULT result,
01773         unsigned char buffer[],
01774         uint32_t buffer_length);
01775
01790     TEK_SA_RESULT (*block_write_data)(tek_sa_data_client_handle dc,
01791         uint64_t request_id,
01792         unsigned char buffer[],
01793         uint32_t buffer_length,
01794         uint32_t* bytes_written);
01795
01804     TEK_SA_RESULT (*block_write_result)(tek_sa_data_client_handle dc,
01805         uint64_t request_id,
01806         TEK_SA_RESULT result);
01807
01809 };
01810 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, register_field, 0, 0);
01811 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, register_method, 4, 8);
01812 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, register_event, 8, 16);
01813 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, register_alarm, 12, 24);
01814 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, register_enum_type, 16, 32);
01815 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, register_struct_type, 20, 40);
01816 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, post_event, 24, 48);
01817 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, set_alarm, 28, 56);
01818 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, reset_alarm, 32, 64);
01819 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, log, 36, 72);
01820 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, get_global_event, 40, 80);
01821 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, update_capabilities, 44, 88);
01822 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, read_progress, 48, 96);
01823 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, read_result, 52, 104);
01824 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, notify_change, 56, 112);
01825 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, write_result, 60, 120);
01826 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, call_method_result, 64, 128);
01827 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, block_read_data, 68, 136);
01828 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, block_write_data, 72, 144);
01829 TEK_SA_VERIFY_STRUCT_OFFSET(tek_sa_transformation_engine, block_write_result, 76, 152);
01830
01846 typedef TEK_SA_RESULT (*tek_sa_load_plugin_fn)(

```

```
01847     struct tek_sa_transformation_engine* api,
01848     const struct tek_sa_data_client_configuration* plugin_configuration,
01849     struct tek_sa_data_client_plugin* plugin,
01850     struct tek_sa_configuration* tek_configuration);
01851
01852 #ifndef TEK_SA_DATA_CLIENT_IMPL
01853 #ifdef _WIN32
01854 #define TEK_SA_API_EXPORT __declspec(dllexport) __stdcall
01855 #else
01856 #define TEK_SA_API_EXPORT __attribute__((__visibility__("default")))
01857 #endif
01858 #endif
01859
01860 TEK_SA_RESULT TEK_SA_API_EXPORT
01861 load_plugin(struct tek_sa_transformation_engine* api,
01862            const struct tek_sa_data_client_configuration* plugin_configuration,
01863            struct tek_sa_data_client_plugin* plugin,
01864            struct tek_sa_configuration* tek_configuration);
01865
01866 #endif
01867
01868 #ifdef __cplusplus
01869 }
01870 #endif
01871
01872 #undef TEK_SA_STRUCT_ALIGN_SELECT
01873 #undef TEK_SA_VERIFY_STRUCT_OFFSET
01874
01875 #endif /* TEK_SOUTH_API_H */
```


Index

- acknowledge_alarm
 - tek_sa_data_client, [44](#)
- block_read
 - tek_sa_data_client, [41](#)
- block_read_data
 - tek_sa_transformation_engine, [55](#)
- block_write
 - tek_sa_data_client, [42](#)
- block_write_data
 - tek_sa_transformation_engine, [56](#)
- block_write_result
 - tek_sa_transformation_engine, [56](#)
- call_method_result
 - tek_sa_transformation_engine, [55](#)
- Common Definitions, [18](#)
 - tek_sa_alarm_handle, [33](#)
 - TEK_SA_BLOCK_TRANSFER_ABORT, [32](#)
 - TEK_SA_BLOCK_TRANSFER_END_OF_FILE, [31](#)
 - tek_sa_datetime, [33](#)
 - TEK_SA_ERR_INVALID_PARAMETER, [30](#)
 - TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE, [30](#)
 - TEK_SA_ERR_OUT_OF_MEMORY, [30](#)
 - TEK_SA_ERR_RETRY_LATER, [30](#)
 - TEK_SA_ERR_SUCCESS, [30](#)
 - TEK_SA_ERR_UNSPECIFIED, [32](#)
 - tek_sa_event_handle, [33](#)
 - tek_sa_field_attributes, [35](#)
 - TEK_SA_FIELD_ATTRIBUTES_READABLE, [35](#)
 - TEK_SA_FIELD_ATTRIBUTES_SUBSCRIBABLE, [35](#)
 - TEK_SA_FIELD_ATTRIBUTES_WRITABLE, [35](#)
 - tek_sa_field_handle, [33](#)
 - tek_sa_field_value, [33](#)
 - TEK_SA_LOG_LEVEL_CRITICAL, [36](#)
 - TEK_SA_LOG_LEVEL_DEBUG, [35](#)
 - TEK_SA_LOG_LEVEL_ERROR, [36](#)
 - TEK_SA_LOG_LEVEL_INFO, [36](#)
 - tek_sa_log_level_t, [35](#)
 - TEK_SA_LOG_LEVEL_TRACE, [35](#)
 - TEK_SA_LOG_LEVEL_WARNING, [36](#)
 - tek_sa_method_handle, [34](#)
 - TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE, [31](#)
 - TEK_SA_READ_RESULT_STATUS_NOK, [31](#)
 - TEK_SA_READ_RESULT_STATUS_OK, [31](#)
 - TEK_SA_READ_RESULT_STATUS_TIMEOUT, [31](#)
 - TEK_SA_RESULT, [34](#)
 - tek_sa_type_handle, [32](#)
 - tek_sa_type_handle_or_type_enum, [32](#)
 - tek_sa_variant_type, [34](#)
 - TEK_SA_VARIANT_TYPE_BOOL, [34](#)
 - TEK_SA_VARIANT_TYPE_BYTE_STRING, [35](#)
 - TEK_SA_VARIANT_TYPE_COMPLEX, [35](#)
 - TEK_SA_VARIANT_TYPE_DATETIME, [35](#)
 - TEK_SA_VARIANT_TYPE_DOUBLE, [35](#)
 - TEK_SA_VARIANT_TYPE_FLAG_ARRAY, [35](#)
 - TEK_SA_VARIANT_TYPE_FLAG_MATRIX, [35](#)
 - TEK_SA_VARIANT_TYPE_FLOAT, [35](#)
 - TEK_SA_VARIANT_TYPE_GUID, [35](#)
 - TEK_SA_VARIANT_TYPE_INT16_T, [34](#)
 - TEK_SA_VARIANT_TYPE_INT32_T, [35](#)
 - TEK_SA_VARIANT_TYPE_INT64_T, [35](#)
 - TEK_SA_VARIANT_TYPE_INT8_T, [34](#)
 - TEK_SA_VARIANT_TYPE_NULL, [34](#)
 - TEK_SA_VARIANT_TYPE_STRING, [35](#)
 - TEK_SA_VARIANT_TYPE_UINT16_T, [34](#)
 - TEK_SA_VARIANT_TYPE_UINT32_T, [35](#)
 - TEK_SA_VARIANT_TYPE_UINT64_T, [35](#)
 - TEK_SA_VARIANT_TYPE_UINT8_T, [34](#)
- connect
 - tek_sa_data_client, [38](#)
- Data Client, [15](#)
 - tek_sa_data_client_handle, [17](#)
 - tek_sa_load_plugin_fn, [17](#)
 - tek_sa_threading_model, [17](#)
 - TEK_SA_THREADING_MODEL_PARALLEL, [18](#)
 - TEK_SA_THREADING_MODEL_SAME_THREAD, [18](#)
 - TEK_SA_THREADING_MODEL_SEQUENTIAL, [18](#)
- data_client_new
 - tek_sa_data_client_plugin, [45](#)
- free
 - tek_sa_data_client, [39](#)
- free_context
 - tek_sa_data_client_plugin, [46](#)
- get_global_event
 - tek_sa_transformation_engine, [52](#)
- handle
 - tek_sa_data_client, [44](#)
- include/south_api.h, [59](#), [63](#)
- invoke

- tek_sa_data_client, 43
- log
 - tek_sa_transformation_engine, 52
- notify_change
 - tek_sa_transformation_engine, 54
- plugin_context
 - tek_sa_data_client_plugin, 45
- post_event
 - tek_sa_transformation_engine, 50
- read_fields
 - tek_sa_data_client, 39
- read_progress
 - tek_sa_transformation_engine, 53
- read_result
 - tek_sa_transformation_engine, 54
- register_alarm
 - tek_sa_transformation_engine, 49
- register_enum_type
 - tek_sa_transformation_engine, 50
- register_event
 - tek_sa_transformation_engine, 49
- register_features
 - tek_sa_data_client, 38
- register_field
 - tek_sa_transformation_engine, 48
- register_method
 - tek_sa_transformation_engine, 48
- register_struct_type
 - tek_sa_transformation_engine, 50
- reset_alarm
 - tek_sa_transformation_engine, 51
- set_alarm
 - tek_sa_transformation_engine, 51
- south_api.h
 - TEK_SA_API_VERSION, 63
 - TEK_SA_API_VERSION_MAJOR, 62
 - TEK_SA_API_VERSION_MINOR, 63
 - TEK_SA_API_VERSION_PATCH, 63
- subscribe
 - tek_sa_data_client, 42
- tek_sa_additional_file, 21
- tek_sa_alarm_handle
 - Common Definitions, 33
- TEK_SA_API_VERSION
 - south_api.h, 63
- TEK_SA_API_VERSION_MAJOR
 - south_api.h, 62
- TEK_SA_API_VERSION_MINOR
 - south_api.h, 63
- TEK_SA_API_VERSION_PATCH
 - south_api.h, 63
- TEK_SA_BLOCK_TRANSFER_ABORT
 - Common Definitions, 32
- TEK_SA_BLOCK_TRANSFER_END_OF_FILE
 - Common Definitions, 31
- tek_sa_byte_string, 22
- tek_sa_complex_data, 22
- tek_sa_complex_data_array, 23
- tek_sa_complex_data_array_item, 23
- tek_sa_complex_data_matrix, 24
- tek_sa_configuration, 21
- tek_sa_data_client, 37
 - acknowledge_alarm, 44
 - block_read, 41
 - block_write, 42
 - connect, 38
 - free, 39
 - handle, 44
 - invoke, 43
 - read_fields, 39
 - register_features, 38
 - subscribe, 42
 - unsubscribe, 43
 - write_fields, 40
- tek_sa_data_client_capabilities, 16
- tek_sa_data_client_configuration, 21
- tek_sa_data_client_handle
 - Data Client, 17
- tek_sa_data_client_plugin, 44
 - data_client_new, 45
 - free_context, 46
 - plugin_context, 45
- tek_sa_datetime
 - Common Definitions, 33
- tek_sa_dc_event, 28
- tek_sa_enum_definition, 26
- tek_sa_enum_item_definition, 26
- TEK_SA_ERR_INVALID_PARAMETER
 - Common Definitions, 30
- TEK_SA_ERR_NON_BLOCKING_IMPOSSIBLE
 - Common Definitions, 30
- TEK_SA_ERR_OUT_OF_MEMORY
 - Common Definitions, 30
- TEK_SA_ERR_RETRY_LATER
 - Common Definitions, 30
- TEK_SA_ERR_SUCCESS
 - Common Definitions, 30
- TEK_SA_ERR_UNSPECIFIED
 - Common Definitions, 32
- tek_sa_event_handle
 - Common Definitions, 33
- tek_sa_event_parameter, 27
- tek_sa_field_attributes
 - Common Definitions, 35
- TEK_SA_FIELD_ATTRIBUTES_READABLE
 - Common Definitions, 35
- TEK_SA_FIELD_ATTRIBUTES_SUBSCRIBABLE
 - Common Definitions, 35
- TEK_SA_FIELD_ATTRIBUTES_WRITABLE
 - Common Definitions, 35
- tek_sa_field_handle
 - Common Definitions, 33

- tek_sa_field_value
 - Common Definitions, [33](#)
- tek_sa_field_write_request, [27](#)
- tek_sa_guid, [21](#)
- tek_sa_load_plugin_fn
 - Data Client, [17](#)
- TEK_SA_LOG_LEVEL_CRITICAL
 - Common Definitions, [36](#)
- TEK_SA_LOG_LEVEL_DEBUG
 - Common Definitions, [35](#)
- TEK_SA_LOG_LEVEL_ERROR
 - Common Definitions, [36](#)
- TEK_SA_LOG_LEVEL_INFO
 - Common Definitions, [36](#)
- tek_sa_log_level_t
 - Common Definitions, [35](#)
- TEK_SA_LOG_LEVEL_TRACE
 - Common Definitions, [35](#)
- TEK_SA_LOG_LEVEL_WARNING
 - Common Definitions, [36](#)
- tek_sa_method_argument_description, [26](#)
- tek_sa_method_handle
 - Common Definitions, [34](#)
- tek_sa_read_result, [27](#)
- TEK_SA_READ_RESULT_STATUS_INVALID_HANDLE
 - Common Definitions, [31](#)
- TEK_SA_READ_RESULT_STATUS_NOK
 - Common Definitions, [31](#)
- TEK_SA_READ_RESULT_STATUS_OK
 - Common Definitions, [31](#)
- TEK_SA_READ_RESULT_STATUS_TIMEOUT
 - Common Definitions, [31](#)
- TEK_SA_RESULT
 - Common Definitions, [34](#)
- tek_sa_string, [22](#)
- tek_sa_struct_definition, [25](#)
- tek_sa_struct_field_type_definition, [25](#)
- tek_sa_threading_model
 - Data Client, [17](#)
- TEK_SA_THREADING_MODEL_PARALLEL
 - Data Client, [18](#)
- TEK_SA_THREADING_MODEL_SAME_THREAD
 - Data Client, [18](#)
- TEK_SA_THREADING_MODEL_SEQUENTIAL
 - Data Client, [18](#)
- tek_sa_transformation_engine, [46](#)
 - block_read_data, [55](#)
 - block_write_data, [56](#)
 - block_write_result, [56](#)
 - call_method_result, [55](#)
 - get_global_event, [52](#)
 - log, [52](#)
 - notify_change, [54](#)
 - post_event, [50](#)
 - read_progress, [53](#)
 - read_result, [54](#)
 - register_alarm, [49](#)
 - register_enum_type, [50](#)
 - register_event, [49](#)
 - register_field, [48](#)
 - register_method, [48](#)
 - register_struct_type, [50](#)
 - reset_alarm, [51](#)
 - set_alarm, [51](#)
 - update_capabilities, [53](#)
 - write_result, [54](#)
- tek_sa_type_handle
 - Common Definitions, [32](#)
- tek_sa_type_handle_or_type_enum
 - Common Definitions, [32](#)
- tek_sa_variant, [25](#)
- tek_sa_variant.data, [29](#)
- tek_sa_variant_array, [24](#)
- tek_sa_variant_array.data, [28](#)
- tek_sa_variant_matrix, [24](#)
- tek_sa_variant_type
 - Common Definitions, [34](#)
- TEK_SA_VARIANT_TYPE_BOOL
 - Common Definitions, [34](#)
- TEK_SA_VARIANT_TYPE_BYTE_STRING
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_COMPLEX
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_DATETIME
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_DOUBLE
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_FLAG_ARRAY
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_FLAG_MATRIX
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_FLOAT
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_GUID
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_INT16_T
 - Common Definitions, [34](#)
- TEK_SA_VARIANT_TYPE_INT32_T
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_INT64_T
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_INT8_T
 - Common Definitions, [34](#)
- TEK_SA_VARIANT_TYPE_NULL
 - Common Definitions, [34](#)
- TEK_SA_VARIANT_TYPE_STRING
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_UINT16_T
 - Common Definitions, [34](#)
- TEK_SA_VARIANT_TYPE_UINT32_T
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_UINT64_T
 - Common Definitions, [35](#)
- TEK_SA_VARIANT_TYPE_UINT8_T
 - Common Definitions, [34](#)
- tek_sa_write_result, [27](#)

Transformation Engine, [15](#)

unsubscribe
 tek_sa_data_client, [43](#)

update_capabilities
 tek_sa_transformation_engine, [53](#)

write_fields
 tek_sa_data_client, [40](#)

write_result
 tek_sa_transformation_engine, [54](#)