

Chat-First Data Analytics

First Author*

January 27, 2026

Abstract

This paper introduces *chat-first data analytics*: an approach in which natural language conversation serves as the primary interface to statistical methods, while rigorous, pre-implemented algorithms perform the actual computation. Unlike approaches where large language models generate statistical code—raising concerns about correctness, data privacy, and reproducibility—chat-first analytics separates the interpretive layer (understanding user intent) from the computational layer (executing validated methods). The language model selects appropriate tools; verified implementations produce the results. We present **prompt2analytics**, a software implementation comprising a foundational econometrics library in pure Rust, exposed through the Model Context Protocol (MCP) for integration with language models. The library covers regression analysis with robust and clustered standard errors, panel data models, instrumental variables, difference-in-differences, discrete choice, and time series methods. All implementations are validated against established R packages. Local deployment via Ollama enables complete data isolation, addressing privacy requirements for sensitive data analysis.

Keywords: chat-first analytics, natural language interface, econometrics, Rust, MCP, local LLM, data privacy

1 Introduction

The release of ChatGPT in late 2022 changed how many researchers and analysts approach data analysis. Rather than consulting documentation, writing code from scratch, or learning domain-specific syntax, users began asking questions in plain English: “run a regression of wages on education and experience,” “test whether these two groups have different means,” or “fit an ARIMA model to this time series.” While natural language interfaces to statistical software have been explored for decades—from early database query systems [Androutsopoulos et al., 1995] to commercial tools like SPSS and SAS—LLMs represent a qualitative advance in flexibility and accessibility. This shift promises to lower barriers to data analysis but also raises significant concerns about accuracy, reproducibility, and data privacy.

This paper introduces the concept of *chat-first data analytics*: an approach that applies established tool-augmented language model techniques [Schick et al., 2023, Yao et al., 2023] to statistical and econometric analysis. Natural language conversation serves as the primary interface to statistical methods, while rigorous, pre-implemented algorithms perform the actual computation. The central insight is that language models excel at understanding intent and selecting appropriate methods, but should not be trusted to generate correct statistical code. By separating the interpretive layer (what does the user want?) from the computational layer (how do we compute it correctly?), chat-first analytics can capture the accessibility benefits of conversational interfaces while maintaining the reliability that scientific work demands.

*Department of Economics, University of Somewhere. Email: author@example.org

1.1 The current landscape

The use of large language models (LLMs) for data analysis has grown rapidly. Researchers upload datasets to ChatGPT, Claude, or similar systems and request analyses ranging from simple summary statistics to complex econometric models. A growing body of literature documents both the appeal and the pitfalls of this approach [Nejjar et al., 2024, Sun et al., 2025b]. Recent surveys characterize the emerging field of LLM-based “data agents”—systems that combine language understanding with statistical computation [Korinek, 2025]. The appeal is clear: natural language eliminates the need to learn R formulas, Stata commands, or Python APIs. Domain experts—economists, sociologists, medical researchers—can describe their analytical goals without mastering programming syntax.

The pitfalls, however, are substantial. When an LLM generates statistical code, it may produce programs that run without error but compute the wrong quantity. A request for “clustered standard errors” might yield heteroskedasticity-robust errors instead. A panel data model might omit entity fixed effects. An instrumental variables regression might fail to report first-stage diagnostics. Ludwig et al. [2024] provide an econometric framework for understanding when LLM-generated outputs can be trusted, emphasizing the importance of validation samples and the risks of “training leakage”—the possibility that benchmark datasets or expected outputs were present in the model’s training data, leading to overstated performance on held-out tests. These errors are particularly insidious because they produce plausible-looking output; without deep statistical knowledge, users cannot verify correctness. The very accessibility that makes LLM-assisted analysis attractive also makes it dangerous: users who lack the expertise to write code themselves often lack the expertise to audit generated code.

Beyond correctness, two additional concerns dominate discussions of LLM-based analytics. First, *data privacy*: when users upload datasets to cloud-based language models, sensitive information leaves their control. Survey responses, medical records, financial data, and proprietary business information flow to third-party servers with unclear retention and usage policies. For many research contexts—particularly those involving human subjects or confidential administrative data—this transmission is unacceptable regardless of any privacy assurances. Second, *reproducibility*: conversational sessions with LLMs are ephemeral. The same prompt may yield different code on different days as models are updated. Without a stable computational foundation, replicating an analysis becomes impossible.

1.2 The opportunity

Despite these concerns, the underlying demand is legitimate and likely to persist. Researchers want to focus on their substantive questions—does education affect wages? did the policy reduce crime? is this treatment effective?—rather than on implementation details. The cognitive burden of translating analytical intent into software-specific syntax is real, and anything that reduces this burden frees mental resources for the questions that actually matter.

Moreover, natural language interfaces enable a style of analysis that code-based workflows discourage: exploratory dialogue. A researcher might begin with “show me the relationship between X and Y,” examine the scatterplot, then ask “control for Z,” inspect the regression output, and continue “are there outliers driving this?” Each step builds on the previous, with the language model maintaining context across the conversation. This iterative refinement mirrors how experienced analysts actually think about data, but code-based workflows require explicit state management that interrupts the analytical flow.

A further opportunity emerges from reconsidering the computational architecture. When ChatGPT or Claude perform data analysis, they generate Python code that executes in ephemeral virtual machines with limited computational resources. This architecture reflects the code-generation paradigm: the LLM writes a program, and a sandboxed environment runs it. But if we instead route requests through a structured protocol like MCP, the computational backend

need not be constrained by what an LLM can generate or what a sandboxed Python environment can efficiently execute. We can implement statistical methods in compiled languages optimized for numerical performance. Rust, in particular, offers memory safety guarantees enforced at compile time alongside performance characteristics comparable to C and Fortran—the traditional languages of scientific computing. The MCP architecture thus enables high-performance analytics that are difficult to achieve under the code-generation paradigm.

The opportunity, then, is to design systems that preserve the accessibility and interactivity of conversational interfaces while addressing the concerns of correctness, privacy, reproducibility, and performance. Recent work has begun exploring this direction: [Chen et al. \[2025\]](#) develop an “Econometrics AI Agent” that augments LLMs with domain knowledge to improve completion rates on econometric tasks, while [Hong et al. \[2025\]](#) present a general-purpose “Data Interpreter” agent. Our approach differs by emphasizing pre-validated implementations and local execution rather than enhanced code generation. This is the goal of chat-first data analytics.

1.3 Chat-first data analytics

We define *chat-first data analytics* as an approach that extends the natural language interface paradigm—developed for database queries, data visualization, and general-purpose AI assistants—to statistical and econometric analysis. This approach has two defining properties and one important design choice:

1. **Natural language as the primary interface.** Users describe their analytical goals in plain language rather than programming syntax. The system interprets requests, selects appropriate methods, and explains results conversationally.
2. **Pre-implemented, verified statistical methods.** The language model does not generate statistical code. Instead, it invokes pre-built, tested implementations of standard methods. Correctness is established once, through validation against reference implementations, rather than verified anew for each user request.
3. **Local data processing** (design choice). In our implementation, bulk data never leaves the user’s machine; the language model receives only metadata and aggregated results. This is not definitionally required for chat-first analytics—one could build such a system with cloud-based computation—but we consider it essential for addressing the privacy concerns that motivate much of this work.

This architecture addresses each concern identified above. Correctness is ensured by using validated implementations rather than generated code. Privacy is protected by keeping data local. Reproducibility is achieved because the same method invocation produces identical results—the stochastic element of the language model affects only interpretation, not computation.

The chat-first paradigm differs from both traditional statistical software and from naive LLM-assisted analysis. Unlike R, Stata, or Python, chat-first systems do not require users to learn domain-specific syntax. Unlike asking ChatGPT to write code, chat-first systems do not trust the language model with numerical computation. The language model serves as a translator—converting natural language intent into structured method calls—while verified software performs the actual analysis. This approach builds on advances in tool-augmented language models [[Schick et al., 2023](#), [Qin et al., 2024](#), [Liu et al., 2025](#)], which have demonstrated that LLMs can reliably select and invoke external tools when provided with appropriate schemas [[Qu et al., 2025](#)].

1.4 This paper

This paper presents **prompt2analytics**, a concrete implementation of chat-first data analytics. The software comprises a foundational econometrics library implemented in pure **Rust**, exposed through the Model Context Protocol (MCP) for integration with language models. Users interact through natural language; the language model interprets requests and generates structured tool calls; the **Rust** engine executes validated statistical methods; and results flow back through the language model for explanation.

The implementation provides methods across the core areas of applied econometrics: regression analysis with heteroskedasticity-consistent and clustered standard errors, panel data models including high-dimensional fixed effects, instrumental variables estimation, difference-in-differences, discrete choice models, time series analysis, and standard hypothesis tests. All implementations are validated against established R packages to ensure numerical accuracy.

The remainder of the paper is organized as follows. Section 2 elaborates the design philosophy underlying chat-first analytics and relates it to prior work on natural language interfaces, LLM-based agents, and AutoML. Section 3 describes the software architecture of **prompt2analytics**, including the core library organization, user interfaces, and communication flow. Section 4 demonstrates the chat-first workflow through worked examples. Section 5 presents validation results comparing **prompt2analytics** to established R packages, and Section 6 provides detailed performance benchmarks. Section 7 discusses local LLM deployment for complete data isolation. Section 8 concludes with a discussion of limitations and future directions.

1.5 The statistical software landscape

Before proceeding, we situate **prompt2analytics** within the broader ecosystem of statistical software. The landscape for econometrics has long been dominated by R [R Core Team, 2024], Stata, and increasingly Python. R in particular has developed a rich ecosystem for econometric analysis, as documented by Zeileis and Koenker [2008] and more recently by Michelaki and Tsagris [2025], who provide a systematic overview of 207 econometrics-related R packages. The **AER** package [Kleiber and Zeileis, 2008, 2024] has become a standard reference for applied econometrics in R. Alternative ecosystems have emerged in Julia with **Econometrics.jl** [Calderón, 2020] and in MATLAB with dedicated toolboxes for panel data analysis [Álvarez et al., 2017]. Comparative studies suggest that compiled languages offer substantial performance advantages for computationally intensive econometric applications [Aruoba and Fernández-Villaverde, 2015, Duarte et al., 2020].

While these environments offer mature, well-tested implementations of econometric methods, they present challenges for deployment in systems requiring integration with modern AI interfaces. Moreover, numerical accuracy remains a concern across statistical software platforms, as documented in a series of papers by McCullough and colleagues [McCullough, 1997, McCullough and Vinod, 1999, McCullough, 1999], who demonstrated that users cannot safely assume their software is numerically accurate without verification.

The **Rust** programming language has emerged as a compelling platform for scientific computing, combining the performance characteristics of compiled languages with memory safety guarantees enforced at compile time [Rust Foundation, 2024]. **Rust**’s ownership system prevents common memory errors—buffer overflows, use-after-free, data races in concurrent code—that have caused bugs in numerical software written in C and Fortran. These guarantees are checked by the compiler, not at runtime, so they incur no performance cost. The **Rust** data science ecosystem has matured rapidly, with **polars** providing high-performance DataFrame operations [Pola-rs Contributors, 2024], Apache Arrow **DataFusion** enabling fast analytical query processing [Lamb et al., 2024], and **linfa** [rust-ml Contributors, 2024] offering machine learning algorithms. However, until now, no foundational econometrics library has existed for **Rust**—a

gap that **prompt2analytics** addresses.

1.6 Software availability

prompt2analytics is available as open-source software under the MIT license, which permits commercial use, modification, and redistribution with attribution. The source code, pre-built binaries, installation instructions, and documentation are available at the project repository. Contributions are welcome via pull requests; the repository includes contribution guidelines and a code of conduct.

<https://github.com/prompt2analytics/prompt2analytics>

Supplementary materials accompanying this paper include:

- The 87 test cases used for LLM tool selection evaluation (Section 7), provided as JSON files with prompts, expected tools, and acceptable alternatives
- Benchmark scripts for both R and Rust implementations, enabling reproduction of performance comparisons (Section 6)
- Validation test suites comparing numerical output against R reference implementations (Section 5)

These materials are located in the repository’s **paper/** directory and can be executed using the provided Makefile.

1.6.1 Reproducing benchmarks

Performance benchmarks can be reproduced using the following protocol:

1. Install R 4.5+ with required packages: **plm**, **lfe**, **sandwich**, **forecast**, **microbenchmark**
2. Build **prompt2analytics** in release mode: `cargo build -release -p p2a-cli`
3. Execute benchmarks: `make -C paper/code benchmarks`

Both languages use `seed = 42` for random number generation. The benchmark protocol includes 10 warmup iterations before 100 measured iterations for fast methods (50 iterations for moderate, 20 for slow). Detailed instructions are provided in `paper/code/README_REPRODUCIBILITY.md`.

1.6.2 Version information

Results in this paper were generated with the following software versions:

- Rust: 1.85.0 (stable)
- R: 4.5.0 with OpenBLAS
- Key R packages: **plm** 2.6-4, **lfe** 3.1-0, **sandwich** 3.1-1, **fixest** 0.12.1, **forecast** 8.23.0
- Operating system: Ubuntu 24.04 LTS (Linux 6.8)

A **Dockerfile** in the repository root provides a containerized environment with all dependencies pinned to these versions. To reproduce all results in a container:

```
docker build -t p2a-paper .
docker run -v $(pwd)/paper:/output p2a-paper make all
```

The container includes both R and Rust toolchains with identical configurations to those used for this paper. Results from containerized runs should match published figures within measurement noise; any systematic differences indicate environmental factors (CPU architecture, BLAS implementation) affecting performance benchmarks but not numerical accuracy.

2 Design philosophy

Traditional statistical software requires users to learn domain-specific syntax: R formulas, Stata commands, or Python APIs. This creates a barrier where the user must translate their analytical intent into software-specific instructions. **prompt2analytics** inverts this relationship: users describe their goals in natural language, and the system determines the appropriate statistical method.

2.1 Chat-first analytics

The central design principle is what we term *chat-first analytics*: the primary interface is conversational rather than programmatic. A user might request “estimate the effect of education on wages, controlling for experience and industry, with robust standard errors” without specifying whether this requires OLS, fixed effects, or instrumental variables. The system interprets the request, selects appropriate methods, executes the analysis, and returns results with natural language explanation.

This approach builds on a long history of natural language interfaces for data. Early systems like LUNAR [Woods, 1973] demonstrated that users could query databases in English, though these systems were limited to specific domains and required careful phrasing [Androutsopoulos et al., 1995]. The text-to-SQL paradigm, exemplified by benchmarks like Spider [Yu et al., 2018], has driven substantial progress in translating natural language to structured queries [Li et al., 2024]. Similarly, systems like NL4DV [Narechania et al., 2021] enable natural language specification of data visualizations.

Our approach differs from these predecessors in two key respects. First, we target statistical analysis rather than data retrieval or visualization alone—the system must select among econometric methods, not just translate queries to SQL. Second, we leverage large language models as the interpretive layer, providing flexibility that rule-based systems cannot match.

This conversational paradigm offers several advantages. It lowers the barrier to entry for users unfamiliar with econometric software conventions. It allows domain experts to focus on their research questions rather than implementation details. And it enables exploratory analysis through dialogue—users can refine their analysis iteratively based on results and suggestions from the system.

2.2 Related work: Statistical interfaces

Before discussing the LLM integration, we situate this work within the broader history of statistical computing interfaces. **prompt2analytics** builds on a long tradition of interface innovation in statistical software.

2.2.1 Formula notation and domain-specific languages

The most influential interface innovation in statistical computing was the Wilkinson-Rogers formula notation [Wilkinson and Rogers, 1973], which introduced the symbolic representation of linear models that remains central to R, Stata, and other systems (e.g., $y \sim x_1 + x_2$). Chambers and Hastie [1992] extended this notation in S and later R, establishing design principles for statistical software that prioritize expressiveness and composability [Chambers, 1998, 2008]. The formula interface represents a domain-specific language (DSL) for model specification—a pattern that Stata adopts with its command syntax and that appears in specialized systems like Stan’s probabilistic programming language [Carpenter et al., 2017].

prompt2analytics takes a fundamentally different approach: rather than inventing new notation, it accepts natural language descriptions of analytical intent. This trades the precision of formal DSLs for accessibility, relying on LLMs to bridge the gap between informal specification

and structured execution. The tradeoff is explicit: users gain accessibility at some cost to precision, particularly for complex specifications that formula notation handles concisely.

2.2.2 Natural language interfaces to data systems

Natural language interfaces (NLIs) for data systems have a long history. LUNAR [Woods, 1973] demonstrated feasibility for database querying; subsequent decades produced various NLI systems with limited adoption [Androutsopoulos et al., 1995]. Commercial systems attempted similar approaches: SPSS’s syntax assistance, SAS Enterprise Guide’s point-and-click interface with natural language elements, and JMP’s scripting language with English-like constructs. These systems achieved modest success but remained constrained by the brittleness of rule-based natural language processing.

The text-to-SQL paradigm, revitalized by deep learning, represents recent progress on natural language data interfaces. Benchmarks like WikiSQL [Zhong et al., 2017] and Spider [Yu et al., 2018] have driven substantial improvements in translating natural language to structured queries [Li et al., 2024]. Similarly, NL4DV [Narechania et al., 2021] enables natural language specification of visualizations. These systems target data retrieval and presentation rather than statistical inference.

2.2.3 Automated machine learning

AutoML systems automate model selection through algorithmic search. Auto-WEKA [Thornton et al., 2013], Auto-sklearn [Feurer et al., 2015], and H2O AutoML [LeDell and Poirier, 2020] optimize predictive performance over predefined pipeline spaces. Recent work integrates LLMs into AutoML: Hollmann et al. [2024] use language models to guide feature engineering and hyperparameter search.

AutoML differs from chat-first analytics in objective and scope. AutoML optimizes for prediction; chat-first analytics interprets user intent across prediction, causal inference, hypothesis testing, and description. AutoML searches algorithmically; chat-first analytics responds to natural language. The approaches are complementary—a chat-first system could invoke AutoML pipelines when users request predictive modeling—but serve different purposes.

2.2.4 Computational econometrics

The computational econometrics literature has established standards for numerical accuracy and implementation quality. McCullough [1997] and McCullough and Vinod [1999] documented numerical inaccuracies across commercial and open-source statistical packages, demonstrating that users cannot assume software correctness without verification. This work motivates our validation approach (Section 5).

Textbooks by Davidson and MacKinnon [2004] and Cameron and Trivedi [2005] provide authoritative treatments of econometric methods and their implementation. The R ecosystem for econometrics, surveyed by Zeileis and Koenker [2008] and comprehensively catalogued by Michelaki and Tsagris [2025], provides the reference implementations against which we validate. Notably, packages like `fixest` [Bergé, 2018] and `lfe` [Gaure, 2013] have pushed the frontier on high-dimensional fixed effects estimation; our implementation follows their algorithmic approaches while providing an alternative interface.

2.2.5 Positioning this work

`prompt2analytics` contributes primarily as software engineering rather than methodological innovation. The econometric implementations follow established algorithms; the novelty lies in (1) providing a foundational Rust econometrics library where none previously existed, (2) exposing these implementations through a standardized protocol for LLM integration, and (3)

demonstrating that chat-first interfaces to validated backends can address correctness and privacy concerns that plague code-generation approaches. We do not claim to advance econometric theory or introduce new estimators. The contribution is architectural: separating interpretation from computation in a way that leverages LLM strengths while avoiding their weaknesses for numerical work.

2.3 LLM limitations in chat-first systems

The chat-first paradigm does not replace statistical expertise. Users must still understand their data, formulate sensible research questions, and interpret results critically. The system assists with method selection and execution, not with research design or causal identification.

A related concern is the handling of causal language. Users may request analyses using causal terminology (“estimate the effect of X on Y”) without satisfying identification assumptions. The system does not validate whether causal claims are supported by the research design; it executes the requested statistical procedure and returns results. LLM explanations may use causal language that echoes user prompts even when the underlying analysis provides only associational evidence. Users bear responsibility for ensuring that causal interpretations are warranted by their identification strategy, not merely by the statistical method employed.

2.4 LLM as method selector

Large language models serve as the interpretive layer between user intent and statistical execution. When a user submits a query, the LLM parses the natural language request, considers the available data structure, selects appropriate statistical methods from the available toolkit, generates structured tool calls with correct parameters, and interprets results to formulate a response.

This architecture builds on the well-established tool-augmented LLM paradigm. ReAct [Yao et al., 2023] demonstrated that LLMs can effectively interleave reasoning and action through tool invocation. Toolformer [Schick et al., 2023] showed that language models can learn to decide when and how to invoke external functions. Gorilla [Patil et al., 2023] extended this to API retrieval and invocation. Our design applies these established techniques to the specific domain of statistical and econometric analysis. Systems like Data Interpreter [Hong et al., 2025] and LAMBDA [Sun et al., 2025a] demonstrate that LLMs can orchestrate complex analytical workflows, while surveys document the rapid growth of this paradigm [Sun et al., 2025b, Nejjar et al., 2024].

A key distinction from code-generation approaches—pioneered by systems like GitHub Copilot and OpenAI Codex—is that our system does not ask the LLM to write statistical code. Studies show that LLMs generate incorrect or insecure code in a substantial fraction of cases [Nejjar et al., 2024]. Instead, we provide pre-implemented, verified statistical methods as callable tools. The LLM’s role is method selection and parameter specification—a more constrained task that smaller models can often perform adequately, though not infallibly (see Section 7).

This design also differs from AutoML systems like Auto-sklearn [Feurer et al., 2015] and H2O AutoML [LeDell and Poirier, 2020], which automate model selection through algorithmic search over a predefined space of machine learning pipelines. AutoML optimizes for predictive performance on held-out data; our system interprets user intent expressed in natural language and selects methods appropriate to the stated analytical goal—which may involve causal inference, hypothesis testing, or descriptive analysis rather than prediction. Recent work has begun integrating LLMs into AutoML pipelines (e.g., using GPT to suggest feature engineering steps or interpret model outputs), blurring the boundary between these paradigms. Our approach remains distinct in emphasizing pre-validated implementations over algorithmic search and in targeting econometric methods beyond the prediction-focused scope of typical AutoML systems.

Table 1 compares **prompt2analytics** with other LLM-based data analysis systems. The Econometrics AI Agent [Chen et al., 2025] augments LLMs with domain knowledge to improve code generation for econometric tasks; it remains fundamentally a code-generation approach where the LLM produces `Python` code executed in a sandboxed environment. Data Interpreter [Hong et al., 2025] provides a general-purpose agent for data science tasks through code generation and execution. LAMBDA [Sun et al., 2025a] orchestrates multiple specialized agents for statistical workflows. All three systems generate and execute code, whereas **prompt2analytics** routes requests to pre-validated implementations.

Table 1: Comparison with existing LLM-based data analysis systems

Feature	prompt2analytics	Econometrics AI	Data Interpreter	LAMBDA
Approach	Tool selection	Enhanced code gen	Code gen + exec	Agent orchestration
Computation	Pre-validated Rust	LLM-generated	LLM-generated	LLM-generated
Local execution	Yes (Ollama)	No	No	No
Correctness	Validated vs R	Code review	None	None
Focus	Econometrics	Econometrics	General purpose	General purpose

By delegating numerical computation to specialized implementations, the LLM never performs statistical calculations directly. It orchestrates calls to the analytics engine, leveraging its strength in natural language understanding while avoiding the brittleness of generated code.

2.5 Why Rust

The choice of `Rust` as the implementation language reflects several design priorities. First, `Rust` compiles to native code with performance comparable to `C` and `C++`, providing substantial speedups over interpreted languages for computationally intensive operations like high-dimensional fixed effects estimation or bootstrap inference. Second, `Rust`’s ownership system guarantees memory safety at compile time without garbage collection, eliminating entire classes of bugs—buffer overflows, use-after-free, data races—that can cause crashes or incorrect results in numerical software.

Beyond performance and safety, the `Rust` ecosystem provides high-quality libraries well-suited to statistical computing: **polars** for data manipulation, **ndarray** for numerical arrays, **faer** for linear algebra, and **statrs** for statistical distributions. The **cargo** package manager ensures reproducible builds and dependency management, addressing a persistent challenge in scientific software.

Finally, a single `Rust` codebase compiles to standalone binaries for multiple platforms, WebAssembly for browser deployment, and shared libraries for integration with other languages. This deployment flexibility enables the same analytics engine to power the CLI, the web interface, and potential future integrations with `R` or `Python`.

2.6 MCP as the bridge

The Model Context Protocol (MCP) provides the communication layer between LLMs and the analytics engine [Anthropic, 2024].¹ MCP defines a standardized way for language models to discover available tools, invoke them with structured parameters, and receive structured results.

¹MCP focuses on model-to-tool integration. Complementary protocols address agent-to-agent communication: Google’s Agent2Agent (A2A) protocol [Google, 2025] enables discovery and task delegation between AI agents, while IBM’s Agent Communication Protocol (ACP) [IBM Research, 2025] provides lightweight HTTP-native messaging. A2A and ACP merged under Linux Foundation governance in 2025. For single-agent tool invocation—the pattern used in **prompt2analytics**—MCP remains the dominant standard, with adoption by OpenAI, Microsoft, and Google alongside Anthropic.

Each statistical method is exposed as an MCP tool with a defined schema specifying required and optional parameters. For example, the OLS tool accepts a dataset identifier, dependent variable, independent variables, and options for robust standard errors. The LLM generates tool calls conforming to this schema, and the MCP server routes them to the appropriate Rust implementation.

This architecture decouples the language understanding layer from the computation layer. The LLM can be swapped (Claude, GPT, Ollama) without changing the analytics engine. Conversely, the statistical implementations can be updated or extended without modifying the LLM integration.

2.7 Data locality and privacy

A key design principle is that bulk data processing occurs locally. When a dataset is loaded, only metadata is transmitted to the LLM: column names, data types, row counts, and null percentages. The LLM uses this schema information to formulate appropriate tool calls. Statistical computations—matrix operations, parameter estimation, inference—execute entirely on the local machine, with only aggregated results (coefficients, standard errors, test statistics) returned through the LLM.

2.7.1 Tools that transmit data

Users should understand which operations may transmit data beyond metadata and aggregated results:

- *Data preview* (**head**, **tail**, **sample**): Returns actual row values for inspection. Requested sample size determines transmission volume.
- *Data profiling*: May include frequent values from categorical columns, min/max values for numeric columns, and example values for pattern detection.
- *Outlier detection*: Reports specific observations identified as outliers, including their variable values.
- *Error messages*: Failed operations may return the problematic values in error context (e.g., “column ‘salary’ contains non-numeric value ‘N/A’ at row 47”).

Statistical estimation tools—regression, panel methods, hypothesis tests—transmit only summary statistics (coefficients, standard errors, test statistics, p -values), not individual observations. Residual diagnostics report aggregate properties (normality tests, autocorrelation) rather than observation-level residuals unless specifically requested.

2.7.2 Information leakage through aggregates

Even aggregated statistics can leak sensitive information in certain contexts. Coefficient estimates in small-sample regressions may be influenced by individual observations. Group means with small group sizes (particularly singletons) directly reveal individual values. Summary statistics for highly skewed distributions may identify outlying individuals.

Users working with sensitive data should consider whether aggregated output could enable re-identification or inference about protected individuals. Local LLM deployment via Ollama eliminates these concerns entirely by keeping all data and results on the local machine.

2.7.3 Security considerations

MCP implementations face security challenges common to tool-augmented LLM systems. *Prompt injection* attacks embed malicious instructions in data that the LLM then processes, potentially causing unintended tool invocations. *Tool poisoning* attacks modify tool descriptions to influence LLM behavior [OWASP Foundation, 2025].

prompt2analytics mitigates these risks through several design choices:

- Tools have fixed, auditable descriptions embedded in the server binary—external modification is not possible without rebuilding.
- The server executes only pre-defined statistical methods. No arbitrary code execution capability exists; the LLM cannot instruct the server to run shell commands or access files outside loaded datasets.
- Tool calls are logged and can be inspected before execution (in interactive mode) or reviewed in audit logs.
- Dataset access requires explicit loading; the server does not have ambient filesystem access.

Nevertheless, users deploying MCP servers should follow security best practices: avoid loading untrusted data files that could contain injection payloads, review tool calls when processing sensitive data, and prefer local LLM deployment for high-security environments.

The same interface and analytics engine function identically with local or cloud-hosted models, allowing users to select the deployment appropriate to their security requirements.

2.8 Implemented methods

The analytics engine implements standard econometric methods across several categories: regression analysis (OLS with HC0–HC3 robust and clustered standard errors), panel data models (fixed effects, random effects, Hausman test, high-dimensional fixed effects), instrumental variables (2SLS with first-stage diagnostics), causal inference (difference-in-differences, treatment effects), discrete choice models (logit, probit), and time series analysis (ARIMA, VAR, VECM, seasonal decomposition). Full documentation of all methods, including mathematical specifications and implementation details, is available in the package documentation.

2.9 Implementation caveats

Several implemented methods have limitations relative to state-of-the-art econometric practice that users should understand.

2.9.1 Instrumental variables

The 2SLS implementation reports first-stage F -statistics for instrument relevance. The traditional rule-of-thumb ($F > 10$) from Staiger and Stock [1997] has been superseded by more nuanced guidance. Stock and Yogo [2005] provide critical values depending on the number of instruments and acceptable bias levels; Lee et al. [2022] offer further refinements for inference under weak identification. The current implementation does not provide Stock-Yogo critical values or weak-identification-robust inference methods (Anderson-Rubin, conditional likelihood ratio). Users with potentially weak instruments should verify results using R’s **ivmodel** or **AER** packages, which implement these diagnostics.

2.9.2 Difference-in-differences

The DiD implementation assumes the canonical two-group, two-period design. Recent econometric literature has documented severe biases when this estimator is applied to staggered treatment timing, where different units receive treatment at different times. [Goodman-Bacon \[2021\]](#) demonstrates that two-way fixed effects DiD produces a weighted average of all possible 2×2 comparisons, including problematic “forbidden” comparisons using already-treated units as controls. [de Chaisemartin and D’Haultfoeuille \[2020\]](#) and [Sun and Abraham \[2021\]](#) propose alternative estimators robust to treatment effect heterogeneity.

prompt2analytics does not implement these staggered DiD estimators. Users with staggered treatment adoption should use **fixest**’s `sunab()` function, the **did** package, or **did2s** in R. The simple DiD implementation remains appropriate for: (1) true two-period designs with simultaneous treatment, (2) settings where treatment effect homogeneity is plausible, or (3) preliminary analysis before applying robust estimators.

2.9.3 Random effects

The random effects estimator uses the Swamy-Arora variance component estimator, which can produce negative variance estimates for σ_α^2 (the between-entity variance) in certain data configurations. When this occurs, the implementation truncates the estimate to zero and proceeds with pooled OLS, issuing a warning. Alternative variance component estimators (Wansbeek-Kapteyn, maximum likelihood) that handle this edge case more gracefully are not implemented. Unbalanced panels are supported but use listwise deletion when observations are missing.

2.9.4 Discrete choice models

Logit and probit models report coefficients on the latent index scale. For interpretation, marginal effects are computed as *Average Marginal Effects* (AME): the partial derivative $\partial \Pr(y = 1)/\partial x_j$ is evaluated at each observation’s covariate values, then averaged across the sample. This differs from *Marginal Effects at Means* (MEM), which evaluates derivatives at the sample mean of all covariates. AME is generally preferred because it does not depend on potentially unrepresentative “average” covariate values and aggregates over the actual covariate distribution [[Cameron and Trivedi, 2005](#)]. For continuous variables, AME represents the average percentage-point change in probability per unit change in the covariate; for binary variables, it represents the average difference in predicted probability between categories.

2.9.5 Time series models

ARIMA estimation supports non-seasonal models: $\text{ARIMA}(p, d, q)$ with automatic or user-specified orders. Seasonal ARIMA (SARIMA) is partially implemented: seasonal differencing and seasonal AR/MA terms can be specified, but automatic seasonal order selection is not available. Users must specify seasonal orders explicitly (e.g., $\text{SARIMA}(1, 1, 1)(1, 1, 1)_{12}$ for monthly data). For complex seasonal patterns or multiple seasonal periods, R’s **forecast** package provides more sophisticated automatic model selection via `auto.arima()`.

VAR and VECM implementations support lag selection via AIC/BIC and Johansen cointegration testing, but do not implement structural VAR identification (Cholesky, sign restrictions, or external instruments). Users requiring structural impulse responses should use R’s **vars** package.

2.10 Methods not implemented

The current implementation focuses on foundational methods commonly used in applied econometrics. Several important method categories are not yet available:

- *Sample selection*: Heckman two-step correction, control function approaches, and other methods for addressing non-random selection.
- *Quantile regression*: conditional quantile estimation and related inference procedures.
- *Spatial econometrics*: spatial lag models, spatial error models, and spatial autoregressive specifications.
- *GMM and structural estimation*: generalized method of moments beyond 2SLS, including system GMM and continuously updating GMM.
- *Dynamic panel models*: Arellano-Bond, Arellano-Bover/Blundell-Bond system GMM for dynamic panel specifications.
- *Matching estimators*: propensity score matching, coarsened exact matching, genetic matching, and related balancing methods.
- *Synthetic control*: synthetic control methods and synthetic difference-in-differences for comparative case studies.
- *Bootstrap inference*: while bootstrapping is implemented internally, user-facing bootstrap confidence intervals are not yet exposed via MCP.
- *Bayesian methods*: posterior inference, MCMC sampling, and Bayesian model comparison.
- *Nonparametric methods*: kernel density estimation, local polynomial regression, and non-parametric hypothesis tests beyond Wilcoxon.

Users requiring these methods should use R, Stata, or Python for the relevant portions of their analysis. The modular architecture facilitates future extension; contributions implementing additional methods are welcome.

3 Software architecture

prompt2analytics is organized as a Rust workspace comprising four crates that separate concerns between core computation, user interfaces, and LLM integration. Figure 1 illustrates the overall architecture, showing two distinct pathways: direct access via the CLI, and LLM-mediated access through chat interfaces.

p2a-core Core analytics library implementing all statistical methods in pure Rust. This crate has no external econometrics dependencies; all estimators are implemented from first principles using **ndarray** for matrix operations and **faer** for numerically stable linear algebra. Implementations follow standard textbook algorithms: OLS and robust standard errors follow Wooldridge [2010] and Cameron and Trivedi [2005]; panel data methods follow Baltagi [2013]; time series methods follow Hamilton [1994]; maximum likelihood estimation for discrete choice models uses Newton-Raphson as described in Greene [2018].

p2a-cli Command-line interface exposing the full analytics functionality through hierarchical subcommands. Produces a standalone p2a binary.

p2a-mcp Model Context Protocol server exposing 101 tools for LLM integration. Supports multiple transport mechanisms (stdio, HTTP, WebSocket) and maintains session state for dataset persistence.

p2a-dioxus Web application written entirely in Rust using the Dioxus framework, compiling to WebAssembly for browser deployment. Communicates with the MCP server via HTTP.

All user-facing crates depend on **p2a-core**, ensuring that statistical computations are identical regardless of the interface used.

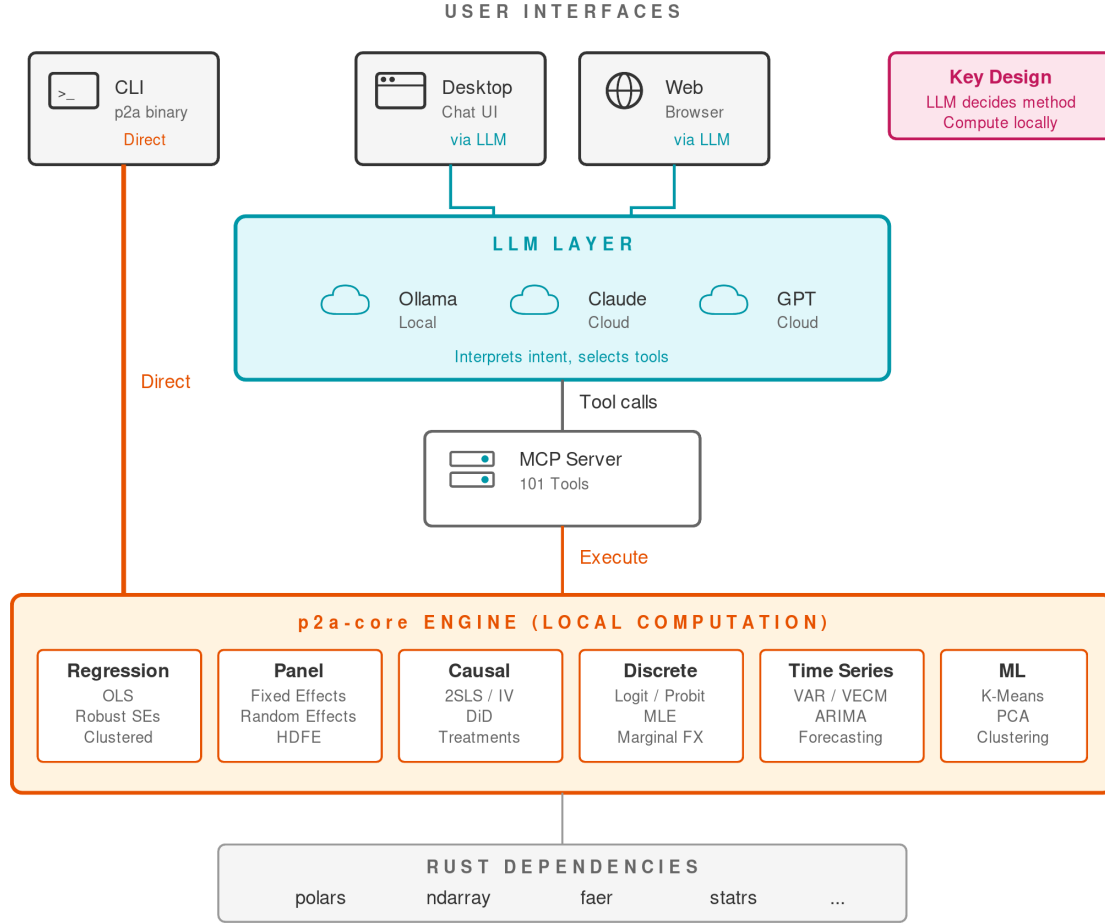


Figure 1: Software architecture of **prompt2analytics**. The CLI provides direct access to the analytics engine (orange path), while chat interfaces route through the LLM layer and MCP server (cyan path). All statistical computation occurs locally in the **p2a-core** engine, which implements methods across six categories using pure Rust dependencies.

3.1 Core library organization

The **p2a-core** library is organized into modules that mirror the analytical workflow from data loading through estimation to visualization. Table 2 summarizes the module structure.

3.1.1 The LinearEstimator trait

A key design decision is the **LinearEstimator** trait, which provides a consistent interface across OLS, panel models, IV, and other linear estimators. Implementors provide core results (coefficients, standard errors, residuals, variance-covariance matrix); derived statistics are computed via default implementations:

```
pub trait LinearEstimator {
    fn coefficients(&self) -> &Array1<f64>;
    fn std_errors(&self) -> &Array1<f64>;
}
```


Table 2: Core library modules in **p2a-core**

Module	Contents
linalg	Matrix operations ($\mathbf{X}'\mathbf{X}$, $\mathbf{X}'\mathbf{y}$, Cholesky, stable inverse via faer); DesignMatrix abstraction
traits	LinearEstimator trait for unified estimator interface
regression	OLS with HC0–HC3 and clustered SEs; NLS, LOESS, GLS, splines
econometrics	Panel (FE, RE, HDFE), IV/2SLS, DiD, logit/probit, VAR/VECM, treatment effects (IPW, DR), synthetic control, RDD, survival
stats	40+ tests: t -tests, ANOVA, χ^2 , Fisher, Wilcoxon, Shapiro-Wilk, Kolmogorov-Smirnov, power analysis
forecasting	ARIMA, Holt-Winters, STL decomposition, Kalman filter, changepoints
ml	Clustering (k -means, DBSCAN, hierarchical), PCA, t -SNE, trees
visualization	Static charts (plotters /PNG), interactive (Plotly/HTML)

```

fn residuals(&self) -> &Array1<f64>;
fn vcov_matrix(&self) -> &Array2<f64>;
fn variable_names(&self) -> &[String];
fn degrees_of_freedom(&self) -> usize;
fn n_obs(&self) -> usize;

// Default implementations compute derived statistics
fn t_stats(&self) -> Array1<f64> { ... }
fn p_values(&self) -> Array1<f64> { ... }
fn confidence_intervals(&self, level: f64) -> ... { ... }
fn r_squared(&self) -> f64 { ... }
fn aic(&self) -> f64 { ... }
fn bic(&self) -> f64 { ... }
}

```

This design ensures that all estimators produce comparable output and that standard post-estimation quantities (confidence intervals, information criteria) are computed consistently. The trait serves a similar role to R’s `lm` object convention, where functions like `summary()`, `coef()`, and `vcov()` operate generically across model types. However, Rust’s trait system enforces this interface at compile time, guaranteeing that all estimators provide the required methods rather than relying on runtime duck typing.

3.1.2 Column-based API

Unlike R’s formula interface (`y ~ x1 + x2`), **p2a-core** uses an explicit column-based API:

```

run_ols(dataset, "wage", &["education", "experience"],
        intercept: true, cov_type: CovarianceType::HC1)

```

This design choice reflects the LLM-mediated context: the language model extracts variable names from natural language requests and generates structured function calls. Formula parsing would add complexity without benefit, since the LLM already performs the translation from intent to specification.

3.1.3 Error handling

The `EconError` type provides specific, actionable error messages for common econometric issues:

```
EconError::SingularMatrix { context, suggestion }
EconError::PerfectMulticollinearity { columns }
EconError::FewClusters { n_clusters } // Warning at n < 10
EconError::ConvergenceFailure { iterations, last_change, suggestion }
EconError::InsufficientEntities { n_entities } // panel data
```

Each variant includes context and suggestions, enabling the LLM to provide helpful guidance when estimation fails. For example, if clustered standard errors are requested with fewer than 10 clusters, the system warns about finite-sample bias and suggests using robust (HC) standard errors instead. The 10-cluster threshold is conservative; the econometric literature suggests that cluster-robust inference may be unreliable with fewer than 20–50 clusters [Cameron and Miller, 2015], but we trigger warnings earlier to alert users to potential concerns.

3.2 User interfaces

Three interfaces provide access to the core functionality, as shown in Figure 1.

3.2.1 Command-line interface

The CLI uses hierarchical subcommands organized by analytical domain:

```
p2a data load sales.csv --name sales
p2a reg ols sales -y revenue -x advertising budget --robust hc1
p2a panel fe sales -y revenue -x advertising --entity firm --time year
p2a viz scatter sales -x advertising -y revenue -o scatter.png
```

Session management enables dataset persistence across commands and script generation for reproducibility. The `-session` flag records all commands to a JSON file that can be exported as an executable script.

3.2.2 MCP server

The MCP server exposes 101 tools organized into categories that mirror the core library structure:

Category	Examples	Tools
Data management	<code>load_dataset</code> , <code>describe_dataset</code>	7
Data transformation	<code>munge_filter</code> , <code>munge_join</code> , <code>munge_pivot</code>	19
Regression	<code>regression_ols</code> , <code>regression_diagnostics</code>	10
Panel data	<code>panel_fixed_effects</code> , <code>hausman_test</code>	5
Causal inference	<code>iv_2sls</code> , <code>diff_in_diff</code>	8
Discrete choice	<code>logit</code> , <code>probit</code>	2
Time series	<code>ts_arima_fit</code> , <code>ts_var</code>	6
Statistics	various hypothesis tests	30+
Visualization	<code>viz_scatter</code> , <code>viz_histogram_interactive</code>	7

Each tool has a JSON Schema defining required and optional parameters, enabling LLMs to generate valid tool calls. The schema design follows several principles: required parameters are minimized to reduce LLM errors, sensible defaults are provided (e.g., HC1 robust standard errors), and parameter names use consistent conventions (dataset identifier is always `dataset`,

dependent variable is `y_var`). Tool descriptions are written to be interpretable by LLMs, specifying when each tool is appropriate and what alternatives exist. The complete tool schema is available in the supplementary materials ([paper/code/mcp_tool_schema.json](#)). The server supports multiple transport mechanisms: stdio for direct CLI integration, HTTP for the web application, and WebSocket for streaming results.

3.2.3 Web application

The web interface is implemented entirely in Rust using the Dioxus framework, which compiles to WebAssembly for browser deployment. This pure-Rust approach ensures type safety across the full stack and eliminates the JavaScript build toolchain. The application communicates with the MCP server's HTTP endpoint and supports three LLM providers: Ollama (local), Claude (Anthropic), and GPT (OpenAI). Conversations are persisted via an embedded SurrealDB database on the server side.

3.3 Communication flow

Figure 2 illustrates the interaction pattern for LLM-mediated requests. When a user submits a natural language query:

1. The query is sent to the LLM provider (cloud or local Ollama)
2. The LLM interprets the request and generates a structured tool call with appropriate parameters
3. The MCP server routes the call to the corresponding Rust method in **p2a-core**
4. The core library loads data and performs computation locally
5. Results (coefficients, test statistics, diagnostics) are serialized to JSON and returned through the MCP server
6. The LLM receives the results and formulates a natural language response
7. The response is displayed to the user

This architecture maintains data locality: the full dataset never leaves the user's machine. Only metadata (column names, types), tool parameters, and aggregated results pass through the LLM. Users requesting data previews should be aware that sample rows will be transmitted; for complete isolation, local LLM deployment via Ollama eliminates all external data transmission.

3.4 Technical design decisions

Several technical choices merit brief explanation.

Numerical precision. All computations use 64-bit floating point (`f64`) throughout, providing approximately 15–17 significant decimal digits. This matches the precision used by R and most established statistical software. Extended precision (128-bit) is not supported; users requiring higher precision for specialized applications (certain financial calculations, cryptographic contexts, or severely ill-conditioned matrices) should use dedicated software.

Conversation persistence. The web application uses SurrealDB, an embedded document database, for storing conversation history and settings. This choice reflects a preference for zero-configuration deployment: the database runs as part of the application binary with no external service required. Analytical datasets are held in memory during sessions and not persisted to the database, limiting storage to lightweight conversation metadata.

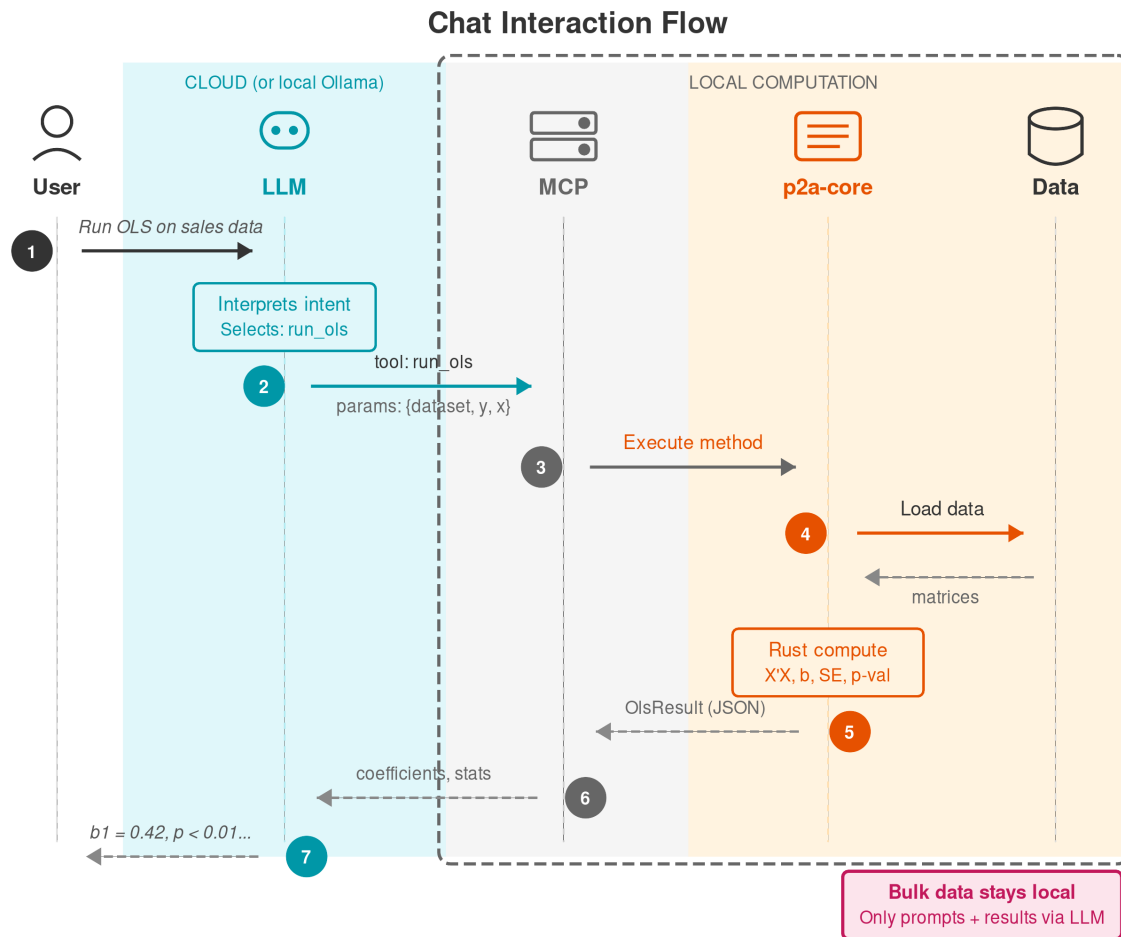


Figure 2: Sequence diagram showing the chat interaction flow. The user's natural language request is interpreted by the LLM, which generates a structured tool call. The MCP server executes the corresponding Rust method, and results flow back through the LLM for natural language explanation. Bulk data processing (shaded region) occurs entirely on the local machine.

Handling unimplemented methods. When users request capabilities outside the implemented set, the LLM’s behavior depends on its training. In some cases, it maps the request to the closest available alternative and explains the substitution. In others, it reports that the capability is not available. The system does not explicitly enumerate unimplemented methods; rather, the LLM infers scope from the tool schema. Users seeking methods not in the tool list should verify availability before assuming support.

4 Examples

This section demonstrates practical usage of **prompt2analytics** through two interfaces: the natural language chat interface powered by large language models, and the command-line interface for scripted workflows. Both interfaces access the same underlying Rust analytics engine, offering users flexibility in how they interact with the software.

We use two datasets throughout this section:

- The Grunfeld investment data [Baltagi, 2013], a classic panel dataset with 200 observations (10 firms over 20 years) containing firm investment, market value, and capital stock. This dataset is included in the **plm** package and can be loaded via `data("Grunfeld", package = "plm")` in R; we provide it as `grunfeld.csv` in the supplementary materials.
- A simulated cross-sectional dataset demonstrating basic regression analysis with heteroskedasticity.

4.1 Chat interface

The chat interface enables natural language interaction with the analytics engine. Users describe their analysis goals in plain language, and the LLM translates these requests into structured tool calls executed by the MCP server. This interface is particularly valuable for exploratory data analysis and for users less familiar with programming syntax. The examples in this section were generated using Claude 3.5 Sonnet via the MCP integration; other models (GPT-4o, Llama 3.1 8B, etc.) produce similar results with minor variations in explanation style.

4.1.1 Loading and exploring data

A typical session begins by loading data and examining its structure:

User: Load the Grunfeld investment dataset from `grunfeld.csv` and show me what’s in it.

I’ll load the dataset and describe its contents.

```
**Dataset loaded: grunfeld**
- Rows: 200
- Columns: 5
```

Column	Type	Description
firm	Integer	Firm identifier (1-10)
year	Integer	Year (1935-1954)
inv	Float64	Gross investment
value	Float64	Market value of firm
capital	Float64	Stock of plant and equipment

This is a balanced panel dataset with 10 firms observed over 20 years, commonly used to demonstrate panel data methods.

4.1.2 OLS regression with robust standard errors

Cross-sectional regression with heteroskedasticity-consistent standard errors.²

User: Run a regression of investment on market value and capital stock.
Use robust standard errors.

Running OLS regression with HC1 robust standard errors...

****OLS Regression Results****

Dependent variable: inv

Variable	Coef	Std Err	t	P> t
(Intercept)	-42.714	11.575	-3.690	0.000
value	0.116	0.007	16.967	0.000
capital	0.231	0.049	4.721	0.000

R-squared: 0.812

Adj. R-squared: 0.810

Observations: 200

Standard errors: HC1 (heteroskedasticity-robust)

Both market value and capital stock are highly significant predictors of investment. A \$1 million increase in market value is associated with approximately \$116,000 more investment, holding capital constant.

4.1.3 Panel data: Fixed effects estimation

For panel data, users can request fixed effects estimation in natural language:

User: The data has a panel structure. Run a fixed effects regression
controlling for firm-specific effects.

Running within-transformation fixed effects estimation...

****Fixed Effects (Within) Estimation****

Dependent variable: inv

Entity fixed effects: firm (10 levels)

Variable	Coef	Std Err	t	P> t
value	0.110	0.012	9.288	0.000
capital	0.310	0.017	17.867	0.000

R-squared (within): 0.767

Observations: 200

Groups: 10

F-statistic: 309.01 (p-value: 0.000)

After controlling for time-invariant firm characteristics, the coefficient on capital increases from 0.23 to 0.31, suggesting that pooled OLS underestimated the association between capital stock and investment. (Note: This change in coefficient reflects removal of omitted variable bias, not necessarily identification of a causal effect.)

²HC1 is the default robust standard error estimator when robust SEs are requested. HC1 applies a degrees-of-freedom correction ($n/(n-k)$) to HC0, improving small-sample performance.

4.1.4 Model comparison: Hausman test

Users can request specification tests without knowing the technical details:

User: Should I use fixed effects or random effects for this analysis?

I'll run a Hausman test to help determine the appropriate specification.

Hausman Test Results

H0: Random Effects is consistent and efficient

H1: Fixed Effects is consistent; Random Effects is inconsistent

Chi-squared statistic: 0.0003

Degrees of freedom: 2

P-value: 0.9999

Recommendation: Random Effects

The test fails to reject the null hypothesis. The near-zero chi-squared statistic indicates virtually no systematic difference between the FE and RE coefficient estimates for this dataset.

Note: Extreme p-values like 0.9999 warrant interpretation with caution. Such values can arise from small test statistics (as here), but also from numerical issues or model misspecification. The Hausman test \citep{Hausman:1978} assumes both estimators are consistent under the null, which requires correct functional form, homoskedastic errors, and no omitted variables correlated with the regressors. The test statistic may be unreliable with small samples, heteroskedasticity, or serial correlation. Users should treat very high p-values as suggestive rather than definitive.

4.1.5 High-dimensional fixed effects

For datasets with multiple categorical dimensions, users can request multi-way fixed effects:

User: Control for both firm and year fixed effects in the regression.

Running two-way fixed effects using alternating projections...

High-Dimensional Fixed Effects Estimation

Dependent variable: inv

Fixed effects: firm (10 levels), year (20 levels)

Variable	Coef	Std Err	t	P> t
value	0.118	0.019	6.137	0.000
capital	0.358	0.054	6.579	0.000

R-squared (within): 0.720

Observations: 200

F-statistic: 217.44 (p-value: 0.000)

4.1.6 Regression diagnostics

Users can request diagnostic tests using natural language:

User: Check the regression assumptions for the OLS model.

Running regression diagnostics...

****Jarque-Bera Test (Normality of residuals)****

Statistic: 89.57

P-value: 0.000

Conclusion: Residuals deviate significantly from normality.

****Breusch-Pagan Test (Heteroskedasticity)****

Statistic: 55.25

P-value: 0.000

Conclusion: Evidence of heteroskedasticity; robust SEs recommended.

****Durbin-Watson Statistic (Autocorrelation)****

Statistic: 0.358

Interpretation: Positive autocorrelation detected (expected in panel data).

****Variance Inflation Factors****

value: 1.31

capital: 1.31

No multicollinearity detected (VIF < 5).

4.2 Command-line interface

The command-line interface provides programmatic access for scripted workflows, batch processing, and integration with other tools. Commands follow a hierarchical structure with intuitive subcommands.

4.2.1 Session-based workflow

The CLI uses sessions to maintain state across commands. All commands that work with datasets require an active session:

```
# Start a session and load data
```

```
p2a --session analysis.json data load grunfeld.csv --name grunfeld
```

```
# Verify the data loaded correctly
```

```
p2a --session analysis.json data describe grunfeld
```

```
# Preview first rows
```

```
p2a --session analysis.json data head grunfeld --n 5
```

Output from data describe:

Dataset: grunfeld

Rows: 200

Columns: 5

Column names: firm, year, inv, value, capital

Column types:

firm: Int64

year: Int64

inv: Float64

value: Float64

capital: Float64

4.2.2 OLS regression

Basic regression with robust standard errors:

```
p2a --session analysis.json reg ols grunfeld \  
    -y inv -x value capital --robust hc1
```

OLS Regression Results

=====

Variable	Coefficient	Std. Error	t-value	p-value
(Intercept)	-42.714369	11.574701	-3.690	0.0003***
value	0.115562	0.006811	16.967	0.0000***
capital	0.230678	0.048866	4.721	0.0000***

R-squared: 0.812408

Adj. R-squared: 0.809537

Observations: 200

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1

4.2.3 Panel data estimation

Fixed effects estimation with firm-level clustering:

```
# Fixed effects
```

```
p2a --session analysis.json panel fe grunfeld \  
    -y inv -x value capital --entity firm
```

```
# Random effects for comparison
```

```
p2a --session analysis.json panel re grunfeld \  
    -y inv -x value capital --entity firm
```

```
# Hausman test
```

```
p2a --session analysis.json panel hausman grunfeld \  
    -y inv -x value capital --entity firm
```

The fixed effects output:

Fixed Effects (Within) Estimation Results

=====

Variable	Coefficient	Std. Error	t-value	p-value
value	0.110124	0.011857	9.288	0.0000***
capital	0.310065	0.017355	17.867	0.0000***

R-squared: 0.766758

Adj. R-squared: 0.765517

Observations: 200

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1

Number of groups: 10

F-statistic: 309.0142 (p-value: 0.0000)

4.2.4 High-dimensional fixed effects

Two-way fixed effects using the alternating projections algorithm:

```
p2a --session analysis.json panel hdfe grunfeld \  
-y inv -x value capital --fe firm year
```

High-Dimensional FE (firm, year) Results

=====

Variable	Coefficient	Std. Error	t-value	p-value
value	0.117716	0.019180	6.137	0.0000***
capital	0.357916	0.054403	6.579	0.0000***

R-squared: 0.720145

Adj. R-squared: 0.670467

Observations: 200

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1

Fixed effect dimensions:

firm: 10 levels

year: 20 levels

F-statistic: 217.4423 (p-value: 0.0000)

4.2.5 Statistical hypothesis tests

The CLI provides access to the full suite of statistical tests:

```
# Shapiro-Wilk normality test on residuals (via diagnostics)
```

```
p2a --session analysis.json reg diagnostics grunfeld \  
-y inv -x value capital
```

```
# Generate data and run a t-test
```

```
p2a --session analysis.json data generate \  
--rows 100 --name test_data \  
--columns '[{"name": "group", "distribution": {"type": "bernoulli", "p": 0.5}},  
{"name": "value", "distribution": {"type": "normal", "mean": 10, "std": 2}}]'
```

4.2.6 JSON output for programmatic use

All commands support JSON output for integration with other tools:

```
p2a --session analysis.json -F json reg ols grunfeld \  
-y inv -x value capital --robust hc1
```

```
{  
  "adj_r_squared": 0.8095367066142903,  
  "coefficients": [  
    {  
      "coefficient": -42.71436943655954,  
      "name": "(Intercept)",
```

```

    "p_value": 0.0002898009336218532,
    "std_error": 11.574701117099613,
    "t_value": -3.690321590546858
  },
  {
    "coefficient": 0.11556215636055236,
    "name": "value",
    "p_value": 0.0,
    "std_error": 0.006810954456871991,
    "t_value": 16.96710161436399
  },
  {
    "coefficient": 0.23067848873196917,
    "name": "capital",
    "p_value": 4.453595026321366e-6,
    "std_error": 0.048865539534342216,
    "t_value": 4.720678231125446
  }
],
"method": "OLS Regression",
"n_observations": 200,
"r_squared": 0.8124080125447282
}

```

4.2.7 Reproducible scripts

Sessions can be exported to standalone bash scripts:

```
p2a script export analysis.json -o reproduce.sh
```

This generates a self-contained script that recreates the entire analysis, facilitating reproducibility and sharing.

4.3 Comparison with R

For reference, the equivalent R code for the fixed effects estimation is:

```

library(plm)
data("Grunfeld", package = "plm")

# Fixed effects model
fe_model <- plm(inv ~ value + capital,
               data = Grunfeld,
               index = c("firm", "year"),
               model = "within")
summary(fe_model)

# Two-way fixed effects
fe_twoway <- plm(inv ~ value + capital,
                data = Grunfeld,
                index = c("firm", "year"),
                model = "within",
                effect = "twoways")
summary(fe_twoway)

```

The **prompt2analytics** implementation produces numerically equivalent results (see Section 5), while offering the conversational interface that enables users unfamiliar with R syntax to perform the same analyses through natural language.

4.4 Extended example: Multi-step workflow

Real-world analysis typically involves multiple steps beyond single-command estimation. This section demonstrates a realistic workflow including data inspection, handling issues, and specification refinement. All examples use Claude 3.5 Sonnet via the MCP integration.

4.4.1 Initial exploration

User: I have employee salary data in salaries.csv. Load it and tell me what variables are available for analysis.

****Dataset loaded: salaries****

- Rows: 1,847

- Columns: 8

Column	Type	Non-null	Description
employee_id	Int64	100%	Unique identifier
salary	Float64	98.2%	Annual salary (USD)
education	String	99.5%	Highest degree (HS/BA/MA/PhD)
experience	Float64	97.8%	Years of experience
department	String	100%	Department name
gender	String	100%	M/F
performance	Float64	94.1%	Performance rating (1-5)
tenure	Int64	100%	Years at company

I notice some missing values, particularly in performance (5.9% missing) and experience (2.2% missing). Would you like me to examine the missingness pattern before proceeding?

4.4.2 Addressing data issues

User: Yes, check if the missing values are random or if there's a pattern. Then proceed with complete cases for now.

****Missingness Analysis****

Performance ratings are more likely to be missing for:

- Recent hires (tenure < 1 year): 23% missing vs 3% for others
- This suggests MNAR (missing not at random) - new employees may not yet have performance reviews.

Experience is missing roughly uniformly across groups (MAR plausible).

****Proceeding with complete cases:**** 1,692 observations (91.6% retained)

Note: Excluding recent hires with missing performance may bias estimates if tenure correlates with other variables of interest. Consider whether this affects your research question.

4.4.3 Initial specification

User: Regress salary on education, experience, and gender. I want to understand the gender pay gap controlling for human capital.

****OLS Regression Results**** (HC1 robust standard errors)

Variable	Coef	Std Err	t	P> t
(Intercept)	42,156	1,247	33.81	0.000
education_BA	8,934	892	10.02	0.000
education_MA	15,267	1,103	13.84	0.000
education_PhD	22,891	1,456	15.72	0.000
experience	1,247	89	14.01	0.000
gender_M	4,892	743	6.58	0.000

R-squared: 0.412

Observations: 1,692

The coefficient on gender_M suggests men earn approximately \$4,892 more than women with equivalent education and experience. However, this model doesn't account for department or performance differences.

4.4.4 Specification refinement

User: Add department fixed effects and performance rating. Also check for heteroskedasticity.

****Regression with Department Fixed Effects****

Variable	Coef	Std Err	t	P> t
education_BA	6,234	812	7.68	0.000
education_MA	11,456	1,021	11.22	0.000
education_PhD	17,234	1,298	13.28	0.000
experience	1,089	82	13.28	0.000
performance	3,456	312	11.08	0.000
gender_M	2,134	698	3.06	0.002

R-squared (within): 0.523

Department FE: 12 groups

****Breusch-Pagan test:**** chi2 = 47.3, p < 0.001

Heteroskedasticity detected; robust SEs already applied.

Adding department controls and performance reduces the gender coefficient from \$4,892 to \$2,134 (a 56% reduction), suggesting much of the raw gap reflects sorting across departments. The remaining \$2,134 gap is still statistically significant (p = 0.002).

This multi-turn dialogue illustrates several features of chat-first analytics: context preservation across turns (the system remembers the loaded dataset and previous specifications), proactive identification of data issues, and progressive model refinement guided by user questions. The LLM provides interpretive commentary while all computations execute through validated Rust implementations.

4.5 Error handling and recovery

Real analysis frequently encounters errors—multicollinearity, convergence failures, invalid specifications. This section demonstrates how the system handles common failure modes and guides users toward recovery.

4.5.1 Multicollinearity detection

User: Add years_since_hire to the model alongside tenure.

Error: Perfect multicollinearity detected

The design matrix is rank-deficient. Column 'years_since_hire' is a linear combination of existing columns.

Details:

- 'years_since_hire' = 'tenure' (correlation: 1.000)
- These variables measure the same underlying concept.

Suggested actions:

1. Remove one of the collinear variables
2. If both are theoretically important, consider which better captures your construct of interest

I'll proceed with the original specification (excluding years_since_hire).
Would you like to try a different variable instead?

The system detects perfect multicollinearity before estimation fails and provides actionable guidance. For near-multicollinearity (high VIF but invertible matrix), the system issues warnings rather than errors.

4.5.2 Convergence failure in iterative estimation

User: I want to model whether employees receive bonuses (binary outcome) using a logit model with all available predictors and department fixed effects.

Warning: Convergence issues detected

Logit estimation with department fixed effects encountered problems:

Issue: Perfect prediction in some groups

- Department "Legal" has 0% bonus rate (23 observations)
- Department "Compliance" has 100% bonus rate (18 observations)

When a fixed effect perfectly predicts the outcome, the coefficient diverges to $\pm\infty$ and the log-likelihood is undefined.

Options:

1. Drop singleton departments (41 observations, 2.4% of sample)
2. Use a linear probability model instead (robust to separation)
3. Use penalized likelihood (Firth correction)

Running linear probability model with department FE...

Variable	Coef	Std Err	t	P> t
performance	0.142	0.018	7.89	0.000
tenure	0.023	0.004	5.75	0.000
experience	0.008	0.003	2.67	0.008

Note: LPM coefficients are marginal effects. The model dropped 2 departments with perfect prediction (41 observations).

The system explains the statistical issue (perfect separation), offers multiple solutions, and proceeds with a reasonable default while documenting what was done. Users unfamiliar with convergence issues receive educational context alongside the workaround.

4.5.3 Small cluster warnings

User: Cluster the standard errors by department.

Clustered Standard Errors (by department)

Variable	Coef	Robust SE	Cluster SE	t	P> t
performance	0.142	0.018	0.031	4.58	0.001
tenure	0.023	0.004	0.007	3.29	0.008
experience	0.008	0.003	0.004	2.00	0.071

Warning: Small number of clusters (G = 10)

Clustered standard errors require $G \rightarrow \infty$ asymptotics. With only 10 clusters, standard errors may be biased downward and t -statistics inflated. Consider:

1. **Wild cluster bootstrap** for more reliable inference
2. **Degrees-of-freedom correction** (applied here: t_{G-1} distribution)
3. **Alternative clustering level** if a higher-level grouping exists

The experience coefficient, marginal at conventional levels ($p = 0.071$), should be interpreted with particular caution given the small cluster count.

4.5.4 Out-of-scope requests

User: Run a Bayesian regression with informative priors on the coefficients.

Method not available

Bayesian inference is not currently implemented in prompt2analytics. The system provides frequentist methods only.

Available alternatives:

- OLS with robust standard errors (implemented)
- Ridge/LASSO regularization for coefficient shrinkage (implemented)
- Bootstrap confidence intervals for non-asymptotic inference (implemented)

For Bayesian analysis, consider:

- R: 'rstanarm', 'brms', or 'MCMCpack'
- Python: 'PyMC', 'PyStan', or 'bambi'
- Stan: Direct probabilistic programming

Would you like to proceed with one of the available frequentist alternatives?

When users request unimplemented methods, the system clearly indicates the limitation, suggests available alternatives within the system, and points to external tools for the specific capability. This transparency helps users understand system boundaries rather than receiving an inappropriate substitute.

4.5.5 Missing data handling

User: What happens to observations with missing values?

Missing Data Handling

Current behavior: **Listwise deletion** (complete cases only)

For the current dataset:

- Original observations: 1,847
- Complete cases: 1,692 (91.6%)
- Dropped: 155 observations with missing values

Missing by variable:

Variable	Missing	Pct
performance	109	5.9%
experience	41	2.2%
salary	33	1.8%
education	9	0.5%

Implications:

- Estimates are unbiased if data are Missing Completely At Random (MCAR)
- If missingness depends on observed variables (MAR), consider imputation
- If missingness depends on unobserved values (MNAR), specialized methods needed (Heckman selection, pattern-mixture models)

Not implemented: Multiple imputation, inverse probability weighting for missing data. For these methods, use R ('mice', 'Amelia') or Python ('sklearn.impute').

4.5.6 Summary: Error handling philosophy

The examples above illustrate the system's approach to errors:

1. **Detection before failure.** Where possible, problems are identified before estimation fails (multicollinearity, perfect separation).
2. **Explanation over error codes.** Error messages explain the statistical issue, not just the computational symptom.
3. **Actionable suggestions.** Each error includes concrete options for proceeding, with tradeoffs noted.
4. **Transparent limitations.** When requests exceed system capabilities, the response clearly states what is unavailable and suggests alternatives.
5. **Conservative defaults.** When automatic workarounds are applied (e.g., dropping perfect-prediction groups), the system documents what was done and why.

This approach aims to make errors educational rather than frustrating, particularly for users less familiar with the underlying statistical issues. However, the LLM explanations should be verified against authoritative sources; they may occasionally oversimplify or mischaracterize subtle statistical concepts.

5 Comparison and validation

A statistical software package must demonstrate both correctness and competitive performance. This section compares **prompt2analytics** against established R packages on both dimensions, showing that the Rust implementation achieves substantial speedups—ranging from $2\times$ to over $100\times$ depending on the method—while matching reference implementations to high numerical precision.

5.1 Methodology

All comparisons follow a standardized protocol designed for reproducibility. For each analytical method, we identify the canonical R implementation used in the applied econometrics literature: `lm()` from **stats** for OLS, `vcovHC()` from **sandwich** [Zeileis, 2004] for heteroskedasticity-consistent standard errors, `plm()` from **plm** [Croissant and Millo, 2008] for panel data models, `felm()` from **lfe** [Gaure, 2013] for high-dimensional fixed effects, `glm()` from **stats** for discrete choice models, and `Arima()` from **forecast** [Hyndman and Khandakar, 2008] for time series.

Benchmark datasets are generated synthetically using identical data-generating processes in both languages with fixed random seeds (`seed = 42`) for exact reproducibility. For regression benchmarks, we use $y_i = \beta_0 + \beta_1 x_{1i} + \beta_2 x_{2i} + \varepsilon_i$ with true parameters $\beta_0 = 1.0$, $\beta_1 = 2.0$, $\beta_2 = -1.5$, and $\varepsilon_i \sim \mathcal{N}(0, \sigma^2)$ where $\sigma = 1.0$. Covariates are drawn as $x_{1i} \sim \mathcal{N}(0, 1)$ and $x_{2i} \sim \mathcal{N}(0, 1)$ with correlation $\rho = 0.3$. For panel data benchmarks, entity effects $\alpha_i \sim \mathcal{N}(0, 0.5^2)$ are added, with 100 entities observed over 10 periods. For discrete choice, the latent index $y_i^* = \beta'x_i + \varepsilon_i$ is transformed via the logit or probit link. Time series data follow ARIMA(1, 1, 1) with $\phi = 0.7$, $\theta = 0.3$, and innovation variance $\sigma_\eta^2 = 1.0$. Complete DGP specifications are provided in `paper/code/README_REPRODUCIBILITY.md`. For numerical validation, we additionally use classic datasets with published results: the Longley dataset [Longley, 1967] for OLS (chosen specifically for its high multicollinearity, which stresses numerical algorithms) and the Grunfeld dataset for panel data.

Each benchmark configuration executes 100 iterations after a warmup phase. This iteration count provides sufficient samples for robust median estimation while keeping total benchmark runtime practical; with 100 observations, the standard error of the median is approximately $1.25 \times \text{IQR} / \sqrt{n}$, yielding sub-millisecond precision for methods with stable timing. R benchmarks use the **bench** package, which handles garbage collection timing; Rust benchmarks use Criterion with automatic warmup and outlier detection. We report full timing distributions (minimum, quartiles, maximum, mean, standard deviation) rather than point estimates alone, as recommended for rigorous performance comparisons. All benchmarks run on identical hardware: an Intel Core i7-1260P processor with 64GB RAM running Linux, with R 4.5.2 using OpenBLAS and Rust 1.92.0 compiled in release mode with link-time optimization.

5.2 Performance comparison

Table 3 summarizes performance results across representative methods and sample sizes. The speedup factors vary considerably by method category and sample size, reflecting differences in algorithmic complexity and the relative weight of interpreter overhead versus numerical computation.

Several patterns emerge from these results. First, speedup factors are largest for methods with significant per-call overhead in R. Panel data methods show the most dramatic improvements: fixed effects estimation at $n = 100$ is $184\times$ faster in **prompt2analytics**, reflecting the substantial overhead of **plm**’s formula parsing, factor handling, and data frame manipulation rather than fundamental computational differences. This extreme speedup should be interpreted with caution: it primarily reflects **plm**’s known inefficiencies for small samples, not a general $184\times$ advantage. As sample size increases and matrix operations begin to dominate, speedup

Table 3: Performance comparison: median execution time (μ s) and speedup factors for representative methods

Category	Method	n	R	p2a	Speedup
Regression	OLS	100	812	42	19×
	OLS	10,000	2,181	924	2.4×
	OLS + HC1	10,000	25,224	1,571	16×
Panel	Fixed effects	100	4,901	27	184×
	HDFE (2-way)	5,000	26,657	1,159	23×
Discrete	Logit	1,000	2,176	401	5.4×
	Probit	1,000	2,760	2,347	1.2×
Time series	ARIMA(1,1,1)	500	4,783	521	9.2×
	MSTL	500	1,853	219	8.5×
ML	K-means ($k = 3$)	1,000	1,274	587	2.2×
	PCA	1,000	246	67	3.7×

factors decrease to more representative levels (5–6× at $n = 10,000$). Users should consider the $n = 10,000$ results as more indicative of typical production performance.

Second, methods involving expensive mathematical functions show smaller speedups. Probit estimation requires repeated evaluation of the standard normal CDF and PDF; both R (via compiled C code) and Rust incur similar costs for these operations, yielding a modest 1.2× speedup at $n = 1,000$. Logit, which uses the computationally simpler logistic function, achieves 5.4× speedup at the same sample size.

Third, robust standard error computation shows consistent speedups (13–16×) across sample sizes. The HC1 estimator requires computing the “meat” matrix $\sum_i \hat{u}_i^2 x_i x_i'$, which benefits from Rust’s efficient memory access patterns and SIMD vectorization in the **faer** linear algebra library.

Figure 3 displays the full timing distributions for selected methods at $n = 10,000$. Beyond the differences in central tendency, **prompt2analytics** shows substantially lower variance: interquartile ranges are typically 10–100× smaller than in R, reflecting the absence of garbage collection pauses and interpreter overhead. This predictability is valuable for production deployments where consistent response times matter.

Memory usage differences are equally striking. For OLS at $n = 10,000$, R allocates approximately 3.6 MB (measured via `bench::mark()`) while **prompt2analytics** reports minimal allocation—under 1 KB beyond the pre-allocated data structures—because operations proceed in-place where possible and temporary buffers are reused across iterations. For robust standard errors at the same sample size, R allocates over 10 MB due to intermediate matrix copies; **prompt2analytics** avoids these through careful ownership management. Rust allocations are measured via custom instrumentation of the global allocator during benchmark runs.

5.3 Numerical validation

Performance gains are meaningless if results are incorrect. We validate all methods against reference implementations using sample-size-dependent tolerances. Counterintuitively, we apply *looser* tolerances (10^{-6}) for small samples ($n < 100$) because ill-conditioned matrices (common in small-sample problems) amplify numerical differences between algorithms. With larger samples ($n > 1,000$), matrix conditioning typically improves, allowing tighter tolerances (10^{-10}) that verify agreement to near machine precision. This approach ensures that minor algorithmic differences in handling numerical edge cases do not produce false validation failures.

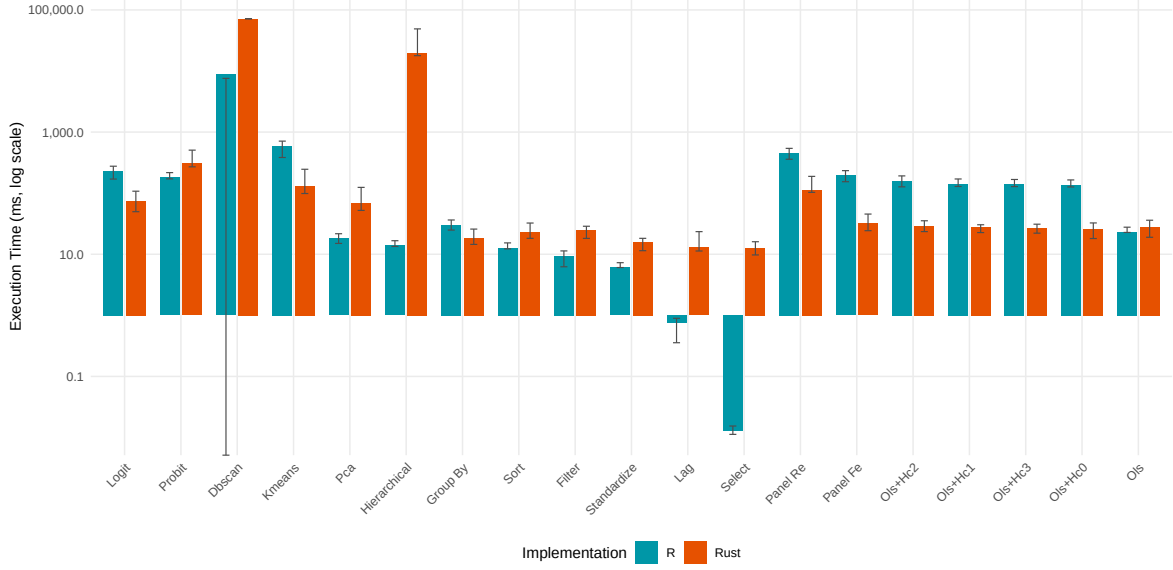


Figure 3: Execution time distributions for R (blue) and **prompt2analytics** (orange) at $n = 10,000$. Y-axis uses logarithmic scale. Boxes show interquartile range; whiskers extend to $1.5 \times$ IQR.

The Longley dataset provides a stringent test for OLS due to its extreme multicollinearity (the condition number of $\mathbf{X}'\mathbf{X}$ exceeds 10^9). Table 4 compares coefficients from R’s `lm()` against **prompt2analytics**. All coefficients match to at least 8 significant digits, and derived statistics (R^2 , F -statistic) match to 4 decimal places.

Table 4: OLS validation on the Longley dataset ($n = 16$, $k = 6$)

Coefficient	R <code>lm()</code>	prompt2analytics	Difference
(Intercept)	−3482.259	−3482.259	$< 10^{-8}$
GNP.deflator	0.01506	0.01506	$< 10^{-8}$
GNP	−0.03582	−0.03582	$< 10^{-8}$
Unemployed	−0.02020	−0.02020	$< 10^{-8}$
Armed.Forces	−0.01033	−0.01033	$< 10^{-8}$
Population	−0.05110	−0.05110	$< 10^{-8}$
Year	1.82915	1.82915	$< 10^{-8}$
R^2	0.9955	0.9955	$< 10^{-4}$

Heteroskedasticity-consistent standard errors (HC0–HC3) are validated against the **sandwich** package. For HC0 and HC1, which differ only by a degrees-of-freedom correction, results match to $< 10^{-8}$. For HC2 and HC3, which involve leverage values $h_{ii} = x_i'(\mathbf{X}'\mathbf{X})^{-1}x_i$, results match to $< 10^{-7}$. The slightly larger tolerance reflects algorithmic differences in leverage computation: **sandwich** extracts leverage from the QR decomposition used internally by `lm()`, while **prompt2analytics** computes the hat matrix diagonal directly via matrix multiplication. Both approaches are numerically valid; the discrepancy arises from different accumulation of floating-point rounding errors rather than any methodological difference. For applied use, differences at the 10^{-7} level are negligible.

Panel data methods are validated using the Grunfeld dataset (10 firms, 20 years, $n = 200$).

Fixed effects coefficients match **plm** to $< 10^{-6}$, and the within R^2 matches to four decimal places. The Hausman test statistic for choosing between fixed and random effects matches to $< 10^{-4}$. Two-way high-dimensional fixed effects, implemented using the MAP algorithm [Gaure, 2013], matches **lfe**’s `felm()` to $< 10^{-5}$.

Beyond these flagship methods, the validation suite covers over 50 methods with more than 100 individual test cases. Statistical tests (t -tests, ANOVA, chi-squared, Fisher’s exact, Wilcoxon, Shapiro-Wilk, Kolmogorov-Smirnov) are validated against R’s **stats** package. Discrete choice models (logit, probit) match `glm()` coefficients and standard errors. Time series methods (VAR, ARIMA) match the **vars** and **forecast** packages. Clustering algorithms match `kmeans()` cluster assignments and within-cluster sum of squares. All validation tests are integrated into continuous integration and can be run via `cargo test -p p2a-core`.

5.4 Sources of performance differences

The performance advantages of **prompt2analytics** stem from several architectural choices inherent to Rust and the library design.

First, Rust’s ownership system enables stack allocation and in-place mutation without garbage collection. Matrix operations can reuse memory rather than allocating new buffers, and there are no GC pauses during computation. This is particularly impactful for iterative algorithms (HDFE, MLE) where R would allocate temporary objects on each iteration.

Second, the **faer** linear algebra library provides highly optimized implementations that leverage SIMD instructions on modern processors. While R with OpenBLAS also uses SIMD for matrix multiplication, the overhead of crossing the R-C boundary for each operation accumulates.

Third, the column-based API eliminates formula parsing. R’s model formula interface (`y ~ x1 + x2`) involves parsing, factor expansion, and model matrix construction—operations that can dominate execution time for small datasets. **prompt2analytics** receives pre-specified column names directly from the MCP tool call.

Fourth, the single-language design avoids the overhead of data serialization between components. In typical R workflows, data moves between R, C, and potentially Fortran; each transition involves memory copies and type conversions. **prompt2analytics** maintains data in native Rust structures throughout.

These advantages diminish as sample size increases and matrix algebra dominates. For very large datasets ($n > 100,000$), speedup factors converge toward 2–3 $\times$ as both implementations spend most time in optimized BLAS routines. The largest advantages appear for small-to-medium datasets ($n = 100$ to 10,000) and for methods with significant per-call overhead.

5.5 Feature comparison

Performance is one dimension of software quality; feature completeness and ecosystem integration are equally important for applied work. Table 5 compares **prompt2analytics** against established R packages across dimensions beyond execution speed.

Several observations emerge from this comparison:

Method coverage. For core panel data methods, **prompt2analytics** provides comparable coverage to specialized packages. The main gaps are advanced standard error options (Driscoll-Kraay, Newey-West, Conley spatial) and staggered difference-in-differences estimators. Users requiring these methods should use **fixest**, which has become the de facto standard for high-performance panel econometrics in R.

Diagnostics. Established packages offer richer diagnostic output: coefficient plots, publication-ready tables, and extensive model comparison facilities. **prompt2analytics** provides JSON output suitable for programmatic processing but lacks native visualization and L^AT_EX table

Table 5: Feature comparison with established R packages

Feature	p2a	fixest	lfe	plm
<i>Panel data methods</i>				
Within (FE) estimator	✓	✓	✓	✓
Random effects (GLS)	✓	—	—	✓
High-dimensional FE	✓	✓	✓	—
Multi-way clustering	2-way	<i>n</i> -way	2-way	2-way
Hausman test	✓	—	—	✓
<i>Standard errors</i>				
HC0–HC3 robust	✓	✓	✓	✓
Driscoll-Kraay	—	✓	—	✓
Newey-West HAC	—	✓	✓	✓
Conley spatial	—	✓	✓	—
<i>Causal inference</i>				
Difference-in-differences	✓	✓	—	—
Sun-Abraham (staggered)	—	✓	—	—
IV/2SLS	✓	✓	✓	✓
Weak instrument tests	F-stat	✓	✓	—
<i>Diagnostics & output</i>				
Coefficient plots	—	✓	—	—
Regression tables (export)	JSON	L ^A T _E X/HTML	L ^A T _E X	L ^A T _E X
Marginal effects	AME	✓	—	—
Formula interface	—	✓	✓	✓
<i>Integration</i>				
LLM/MCP interface	✓	—	—	—
Local execution (no R)	✓	—	—	—
tidyverse compatible	—	✓	—	✓

generation. The LLM layer can format results conversationally, but users requiring formal tables must post-process the output.

Unique capabilities. The distinguishing features of **prompt2analytics** are the natural language interface via MCP and fully local execution without R dependencies. For users prioritizing accessibility or data privacy, these capabilities may outweigh the feature gaps. For users comfortable with R syntax and requiring advanced methods, **fixest** remains the stronger choice for panel econometrics.

When performance matters. The speed advantages documented in Table 3 become practically relevant in specific scenarios: (1) interactive analysis where sub-second response times improve user experience, (2) simulation studies requiring thousands of estimations, (3) cross-validation or bootstrap procedures with many iterations, and (4) deployment contexts where R installation is impractical. For typical one-off analyses on moderate datasets ($n < 100,000$), even R’s slower implementations complete in seconds—fast enough that speed differences are imperceptible to users. The performance advantages of **prompt2analytics** should not be the primary reason for adoption; the natural language interface and local execution model are the more distinctive contributions.

5.6 Limitations

Several caveats apply to these comparisons. First, we compare against specific R packages chosen for their widespread use in applied econometrics; the comparison necessarily reflects a snapshot of rapidly evolving software. Second, benchmarks use synthetic data with simple structure; real datasets with missing values, factors, or complex hierarchies may show different relative performance. Third, R’s flexibility (formula interface, extensive diagnostics, integration with the tidyverse ecosystem) provides value not captured in raw timing comparisons or feature checklists.

6 Performance benchmarks

This section presents performance benchmarks comparing **prompt2analytics** against established R packages. The benchmark suite covers a representative subset of the library’s functionality, focusing on commonly used methods across regression, panel data econometrics, discrete choice models, machine learning, and time series analysis.

Table 6 summarizes the methods included in the benchmark suite. The benchmarks cover approximately 75 method configurations across four categories. While **prompt2analytics** implements over 300 public functions, the benchmark suite focuses on core statistical and econometric methods that are most commonly used and have direct R equivalents for comparison.

6.1 Methodology

Performance comparisons are conducted using a standardized benchmarking framework across both R and Rust implementations. The methodology ensures fair comparison through identical data generating processes, matching random seeds, and equivalent sample sizes.

6.1.1 Data generating processes

All benchmark datasets are generated synthetically using the same specifications in both languages. For regression benchmarks, we generate data following a standard linear model:

$$y_i = \beta_0 + \beta_1 x_{1i} + \beta_2 x_{2i} + \varepsilon_i, \quad \varepsilon_i \sim \mathcal{N}(0, \sigma^2) \quad (1)$$

Table 6: Methods included in the performance benchmark suite

Category	Count	Methods
Regression/Statistics	40	OLS, robust SEs (HC0–HC3), diagnostics, ANOVA (one-way, two-way), t-tests, chi-squared tests, Fisher exact, NLS, LOESS, Wilcoxon, Shapiro-Wilk, Kolmogorov-Smirnov, MANOVA, Tukey HSD, Bartlett, spectral analysis, Box-Pierce/Ljung-Box, Phillips-Perron
Econometrics	15	Panel FE/RE, HDFE (two-way), logit, probit, FEGLM (logit/Poisson with HDFE), IPW, AIPW, mediation analysis, synthetic control, Kaplan-Meier, log-rank, Cox PH, AFT, competing risks
Machine Learning	4	K-means, DBSCAN, hierarchical clustering, PCA
Forecasting	16	ARIMA, MSTL, Holt-Winters, changepoint detection, AR (Yule-Walker/Burg/OLS), decomposition, structural time series (level/trend/BSM), Kalman filter/smoother/forecast

where x_1 and x_2 are drawn from standard normal distributions and $\sigma = 1$. For panel data, we add entity and time fixed effects with appropriate correlation structures. Binary outcomes for discrete choice models are generated via a logit or probit link function.

6.1.2 Benchmark execution

Each method is executed multiple times to obtain stable timing estimates:

- 100 iterations for fast methods (OLS, robust SEs, PCA)
- 50 iterations for moderate methods (panel FE, clustering)
- 20 iterations for slow methods (ARIMA, MSTL decomposition)

Timing is recorded in microseconds. The **microbenchmark** package [Mersmann, 2024] handles warmup and garbage collection in R, including allowing R’s just-in-time byte-code compiler to optimize frequently-executed code paths before measurement begins. Rust benchmarks use Criterion [Heisler and Aparicio, 2024], a statistics-driven benchmarking library that provides automatic warmup, outlier detection, and confidence intervals. Comprehensive benchmarks additionally use a custom framework providing full distribution statistics (min, p25, median, p75, max, mean, std) comparable to **bench** in R.

6.1.3 Hardware and software environment

All benchmarks are executed on identical hardware: a system with an Intel Core i7-1260P (12th Gen) processor and 62GB RAM running Linux 6.17.9. R version 4.5.2 with OpenBLAS is used for R benchmarks. Rust 1.92.0 benchmarks use release builds with LTO (link-time optimization) enabled.

6.1.4 Reference implementations

Table 7 lists the R packages used as reference implementations.

Method Category	R Package	Function
OLS	stats	lm()
Robust SEs	sandwich	vcovHC()
Fixed Effects	plm	plm(..., model="within")
HDFE	lfe	felm()
Logit/Probit	stats	glm(..., family=binomial)
K-Means	stats	kmeans()
Hierarchical	stats	hclust()
PCA	stats	prcomp()
ARIMA	forecast	Arima()
MSTL	forecast	mstl()

Important caveat regarding fixest. A notable omission from the benchmark suite is **fixest** [Bergé, 2018], which has become the dominant R package for fixed effects estimation due to its exceptional performance. The **fixest** package uses highly optimized C++ code with careful memory management and achieves performance that likely exceeds **prompt2analytics** for high-dimensional fixed effects problems. *All performance claims in this section should be understood as comparisons against **plm** and **lfe**, not against the state-of-the-art **fixest** implementation.* We benchmark against **plm** and **lfe** as established reference implementations that remain widely

used in applied work, but users requiring maximum performance for HDFE estimation should evaluate **fixest** alongside **prompt2analytics**. Adding **fixest** benchmarks represents a priority for future work.

6.2 Benchmark results

We present benchmark results across five method categories: regression, panel econometrics, discrete choice, machine learning, and data munging. Sample sizes range from $n = 100$ to $n = 100,000$ observations.

Table 8 presents benchmark results at $n = 100,000$ observations, where computational costs dominate startup overhead. **prompt2analytics** demonstrates substantial speedups for compute-intensive methods: Panel Fixed Effects ($6.1\times$), OLS with robust standard errors (5.1 – $5.5\times$ for HC0–HC3), K-Means clustering ($4.5\times$), Panel Random Effects ($4.0\times$), and Logit regression ($3.1\times$). Group-by aggregation shows a $1.6\times$ speedup. These speedups at $n = 100,000$ represent the most reliable performance comparison, as computational costs dominate language overhead at this scale. Results at smaller sample sizes (not shown) exhibit larger speedup factors that partly reflect **plm**’s known inefficiencies at small n rather than fundamental Rust performance advantages.

Table 8: Performance benchmark results at $n = 100,000$ (median execution time). Speedup = R time / Rust time. Methods with speedup $> 1\times$ are faster in Rust; methods $< 1\times$ are faster in R, typically due to CLI startup overhead dominating trivial computations.

Category	Method	n	R (ms)	Rust (ms)	Speedup
Discrete	Logit	100,000	230.1	75.0	$3.1\times$
Discrete	Probit	100,000	180.8	306.4	$0.6\times$
ML	Kmeans	100,000	592.4	131.7	$4.5\times$
ML	Pca	100,000	18.1	68.5	$0.3\times$
ML	Dbscan	100,000	8762.3	71707.0	$0.1\times$
Munging	Group By	100,000	30.3	18.6	$1.6\times$
Munging	Sort	100,000	12.8	23.4	$0.6\times$
Munging	Filter	100,000	9.4	24.8	$0.4\times$
Munging	Standardize	100,000	6.1	15.9	$0.4\times$
Munging	Lag	100,000	0.7	12.9	$0.1\times$
Munging	Select	100,000	0.0	12.8	$0.0\times$
Panel	Panel Fe	100,000	194.8	31.7	$6.1\times$
Panel	Panel Re	100,000	451.1	114.0	$4.0\times$
Regression	Ols+Hc2	100,000	159.8	29.3	$5.5\times$
Regression	Ols+Hc0	100,000	137.2	26.0	$5.3\times$
Regression	Ols+Hc3	100,000	139.6	27.2	$5.1\times$
Regression	Ols+Hc1	100,000	142.3	27.9	$5.1\times$
Regression	Ols	100,000	23.1	28.0	$0.8\times$

Methods showing R outperforming Rust warrant detailed explanation, as these apparent “slowdowns” illuminate the performance characteristics of both approaches.

Data manipulation operations (filter, mutate, group-by aggregation) show modest speedups or near-parity rather than the dramatic gains seen in statistical methods. This reflects R’s mature, highly optimized implementations for basic operations: **dplyr**() leverages vectorized C++ code that minimizes overhead for common transformations. The **polars** library used in **prompt2analytics** provides competitive but not superior performance for these operations. Users should not expect data wrangling to be dramatically faster than established R workflows.

PCA showing a $0.3\times$ speedup (i.e., R is faster) reflects R’s use of highly optimized LAPACK routines for eigenvalue decomposition. The Rust implementation via **faer** prioritizes numerical stability and memory safety over raw speed for this operation. For PCA as a dimensionality reduction step in larger workflows, this difference is typically negligible; for workflows dominated by repeated PCA computations, R’s `prcomp()` may be preferable.

Probit regression uses Newton-Raphson optimization in our implementation, while R’s `glm()` benefits from decades of refinement in iteratively reweighted least squares (IRLS). The difference represents implementation maturity rather than fundamental language performance.

OLS without robust standard errors is sufficiently fast in both languages that CLI startup overhead dominates computation time at moderate sample sizes. The “slowdown” disappears when measured as pure computation time (excluding process initialization).

The general pattern is that **prompt2analytics** excels at computationally intensive iterative methods (panel fixed effects, robust standard errors, HDFE) where Rust’s compile-time optimizations and memory efficiency compound across iterations. For single-pass operations dominated by optimized linear algebra, R’s BLAS bindings provide comparable or superior performance.

6.2.1 Scaling behavior

Figure 4 shows the distribution of speedup factors across all benchmarked methods at $n = 100,000$ observations.

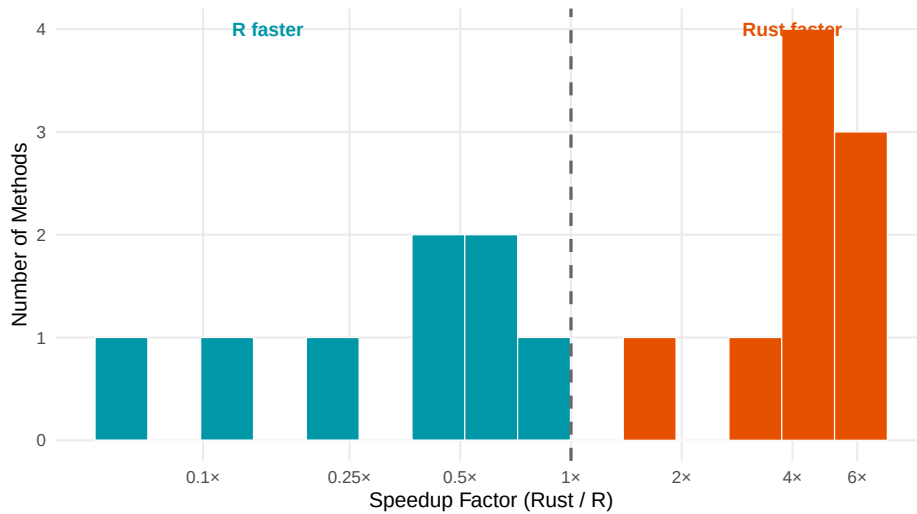


Figure 4: Distribution of speedup factors across all benchmarked methods at $n = 100,000$ observations. The dashed line indicates parity ($1\times$). Methods to the right show Rust outperforming R, while methods to the left show R faster—typically due to CLI startup overhead dominating trivial computations.

Figure 5 provides a detailed view of speedup factors by individual method.

Figure 6 shows execution time comparisons between R and Rust implementations.

6.2.2 Discussion

Several factors contribute to the performance differences observed:

1. **Memory allocation:** Rust’s ownership model and stack allocation reduce heap allocations compared to R’s copy-on-modify semantics.

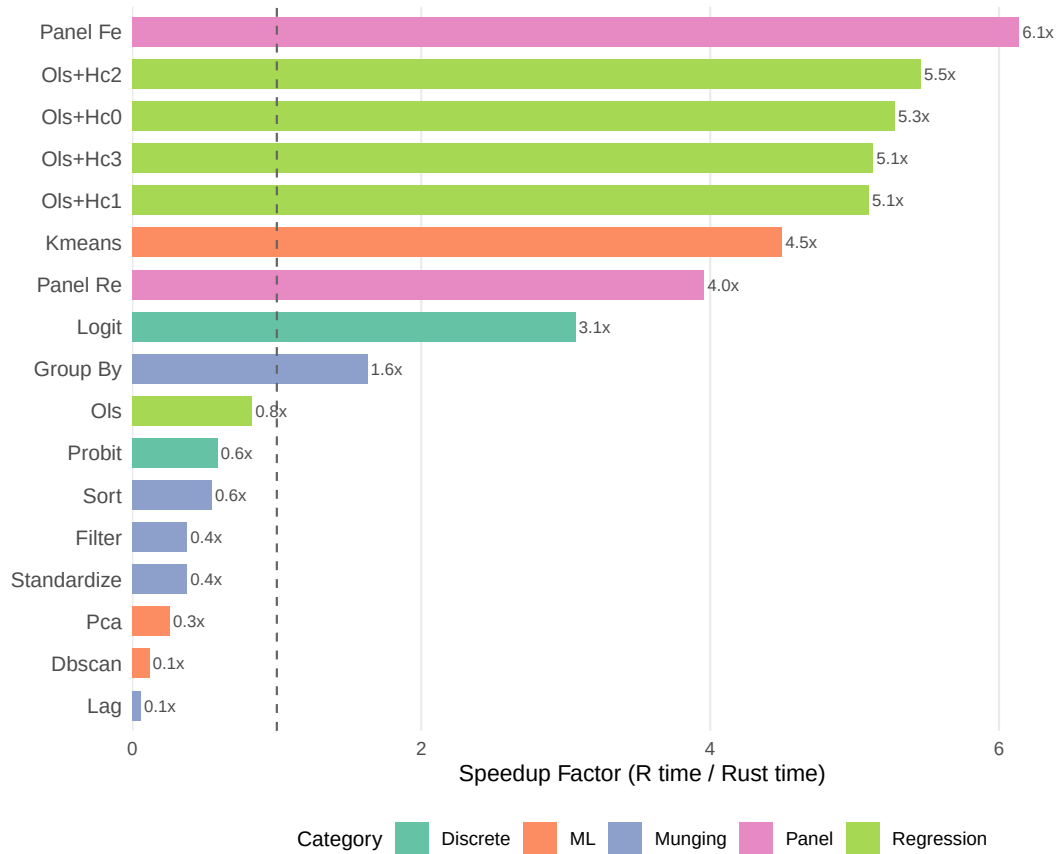


Figure 5: Rust/R speedup factors by method at $n = 100,000$ observations. The vertical line at $1\times$ indicates parity. Bars extending right indicate Rust faster; bars extending left indicate R faster. Compute-intensive iterative methods (Panel FE, OLS+robust SEs, K-Means, Panel RE, Logit) show 3–6 $\times$ speedups. Methods below $1\times$ —including PCA (0.3 $\times$), basic data operations, and Probit—reflect either R’s highly optimized BLAS/LAPACK libraries or CLI startup overhead dominating trivial computations. Gray scale distinguishes method categories for grayscale reproduction.

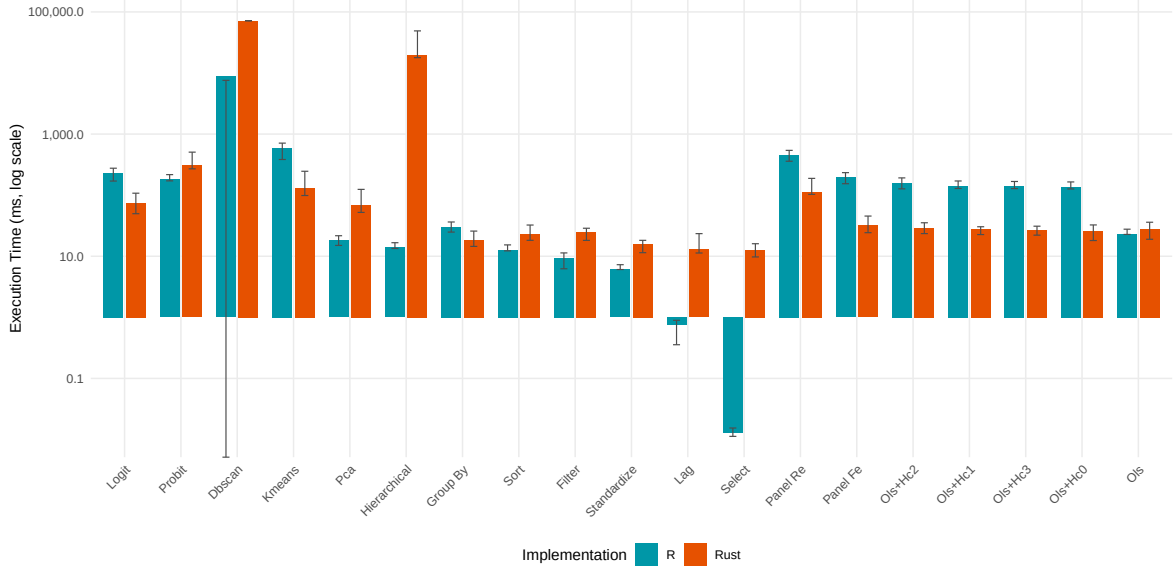


Figure 6: Execution time comparison between R and Rust implementations at $n = 100,000$ observations (log scale). Error bars show min/max execution times across 100 iterations. For methods where computation time exceeds startup overhead, Rust demonstrates consistent performance advantages.

2. **Vectorization:** The **faer** linear algebra library uses SIMD instructions for matrix operations.
3. **Interpreted vs. compiled:** R function call overhead is avoided in compiled Rust code.
4. **Formula parsing:** **prompt2analytics** uses a column-based API rather than formula parsing, eliminating runtime model matrix construction overhead.

Speedup factors generally decrease with larger sample sizes, as the computational cost becomes dominated by matrix operations that are similarly optimized in both languages (via BLAS in R and **faer** in Rust).

7 Fully local deployment

While cloud-hosted language models offer convenience and capability, many use cases require complete data isolation: proprietary business data, personally identifiable information under privacy regulations, or air-gapped environments. This section describes the fully local deployment configuration, where all components—including the language model—run on the user’s machine.

7.1 Architecture

Figure 7 illustrates the local deployment architecture. The key difference from cloud deployment is that the LLM runs locally via Ollama [Ollama Inc., 2024], eliminating all external network communication. User queries, tool calls, and results never leave the local machine.

The local configuration requires:

- Ollama runtime with a function-calling-capable model
- **prompt2analytics** MCP server
- Sufficient RAM for both the model and data processing

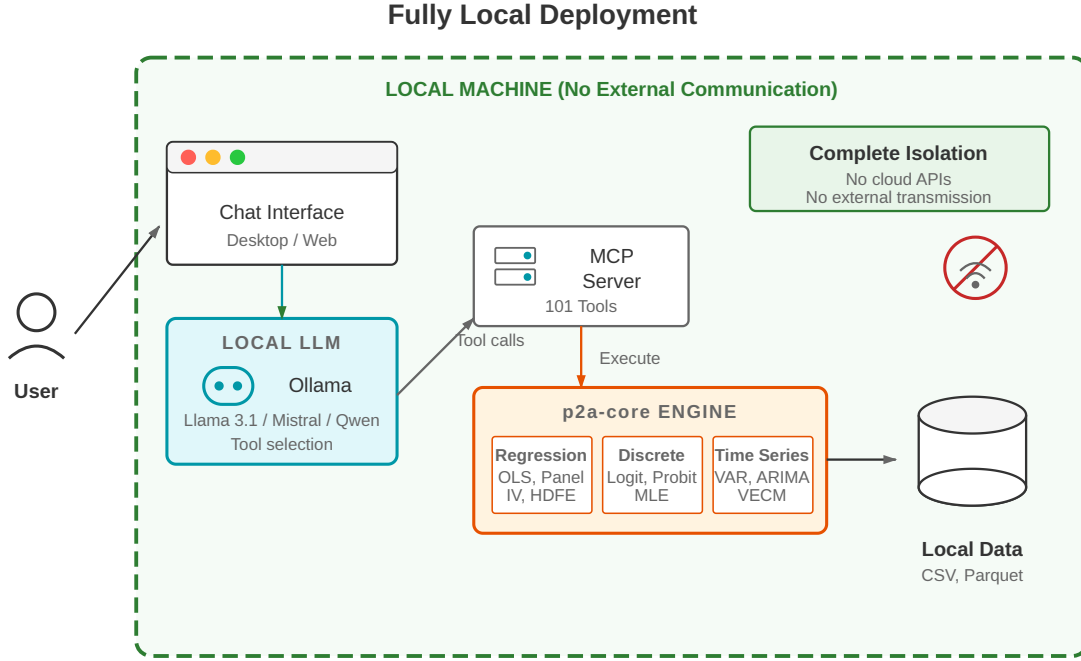


Figure 7: Fully local deployment architecture. All components run on the user’s machine: Ollama hosts the language model, which communicates with the MCP server to execute analytics methods in p2a-core. No data or queries are transmitted externally.

7.2 Tool-calling capabilities in local models

The chat-first architecture significantly reduces the capability requirements for the local LLM. Rather than generating statistical code from scratch—a task requiring deep understanding of matrix algebra, numerical methods, and language-specific APIs—the model only needs to:

1. Parse the user’s natural language request
2. Select appropriate tools from the MCP schema
3. Generate correctly-formatted tool call parameters
4. Interpret and explain the returned results

This constrained task enables smaller, more efficient models to perform effectively. Research on tool-augmented language models has progressed rapidly. Toolformer [Schick et al., 2023] demonstrated that language models can learn to use external tools through self-supervised training. ToolLLM [Qin et al., 2024] introduced a comprehensive framework for training models on 16,000+ real-world APIs, establishing benchmarks for tool-use evaluation. The Berkeley Function Calling Leaderboard (BFCL) provides standardized evaluation of function calling capabilities across models [Patil et al., 2024], enabling systematic comparison of tool-calling performance.

A key finding from this literature is that fine-tuned small language models can match or exceed larger models on targeted tool selection tasks [Patil et al., 2023]. This is particularly relevant for chat-first analytics, where the tool-calling task is well-defined: selecting from a fixed set of statistical methods with structured parameter schemas.

7.3 Tool selection evaluation

To assess the practical viability of local deployment, we evaluated LLM performance on econometric tool selection—the core capability required for chat-first analytics.

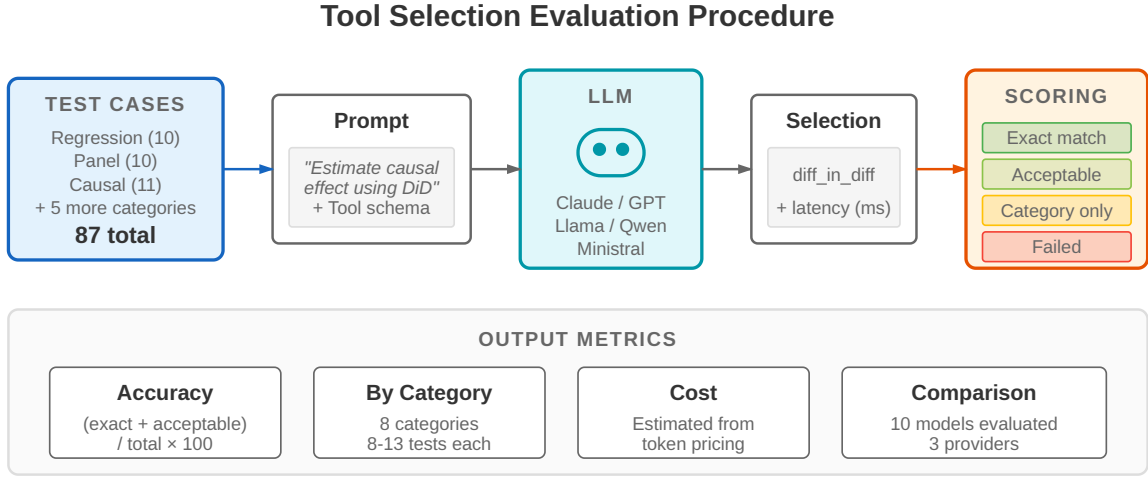


Figure 8: Tool selection evaluation procedure. Each of 87 test cases presents a natural language prompt describing an analytical task. The LLM receives the prompt along with the **prompt2analytics** tool schema and must select the appropriate method. Responses are scored by comparing the selected tool against expected answers.

Figure 8 illustrates the evaluation procedure. We constructed 87 test cases spanning eight categories: regression (15 cases), panel data (12 cases), causal inference (14 cases), discrete choice (8 cases), time series (12 cases), hypothesis testing (10 cases), machine learning (9 cases), and visualization (7 cases). Each test case presents a natural language prompt describing an analytical task (e.g., “estimate the causal effect of a policy change using pre/post data with treatment and control groups”). The test set emphasizes method selection decisions rather than parameter extraction; prompts explicitly name variables when column names are required. The model must select the appropriate tool from the **prompt2analytics** schema. Responses are scored as:

- *Exact*: correct tool selected
- *Acceptable*: valid alternative tool (e.g., logit vs. probit for binary choice)
- *Category*: correct domain, wrong specific method
- *Failed*: invalid or nonsensical selection

Accuracy is computed as (exact + acceptable) / total.

Figure 9 presents overall accuracy by model. The results demonstrate that tool selection—unlike code generation—is achievable even by smaller models. Claude 3.5 Haiku and Qwen 2.5 72B (an open-source model) achieve 100% accuracy. Notably, Ministral 3B, a model small enough to run on consumer hardware with only 6 GB VRAM, achieves 90.8% accuracy, making it viable for local deployment scenarios where hardware constraints preclude larger models.

Figure 10 shows accuracy by category. Performance is uniformly high across most categories, with errors concentrated in edge cases requiring fine distinctions between related methods. For instance, Ministral 3B shows lower accuracy on time series (66.7%) where distinguishing between VAR, VARMA, and VECM specifications proves challenging for the smaller model. Specific confusion patterns include: selecting VAR when VECM is appropriate (failing to recognize cointegration requirements), choosing ARIMA for multivariate series that require VAR, and defaulting to simpler univariate methods when the prompt describes multiple interrelated series. These errors reflect the subtle distinctions in time series econometrics that require understanding whether variables are cointegrated, whether the analysis is univariate or multivariate, and whether structural relationships should be imposed.

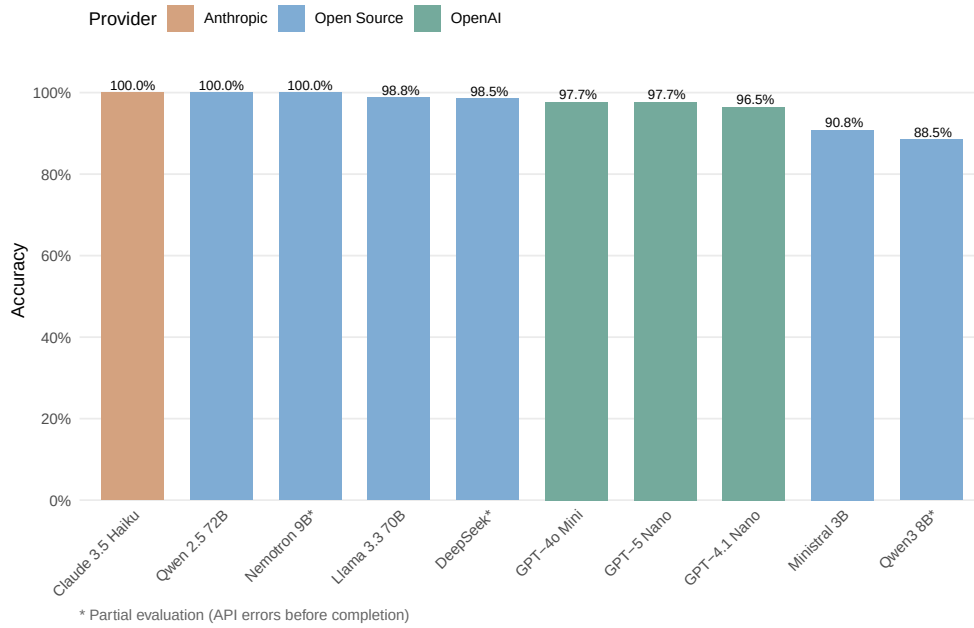


Figure 9: Tool selection accuracy across models. Accuracy is computed as (exact + acceptable matches) / total tests. All models were evaluated on the complete 87-test benchmark. Claude 3.5 Haiku and Qwen 2.5 72B achieve perfect accuracy; even the smallest model (Ministral 3B at 3 billion parameters) exceeds 90%.

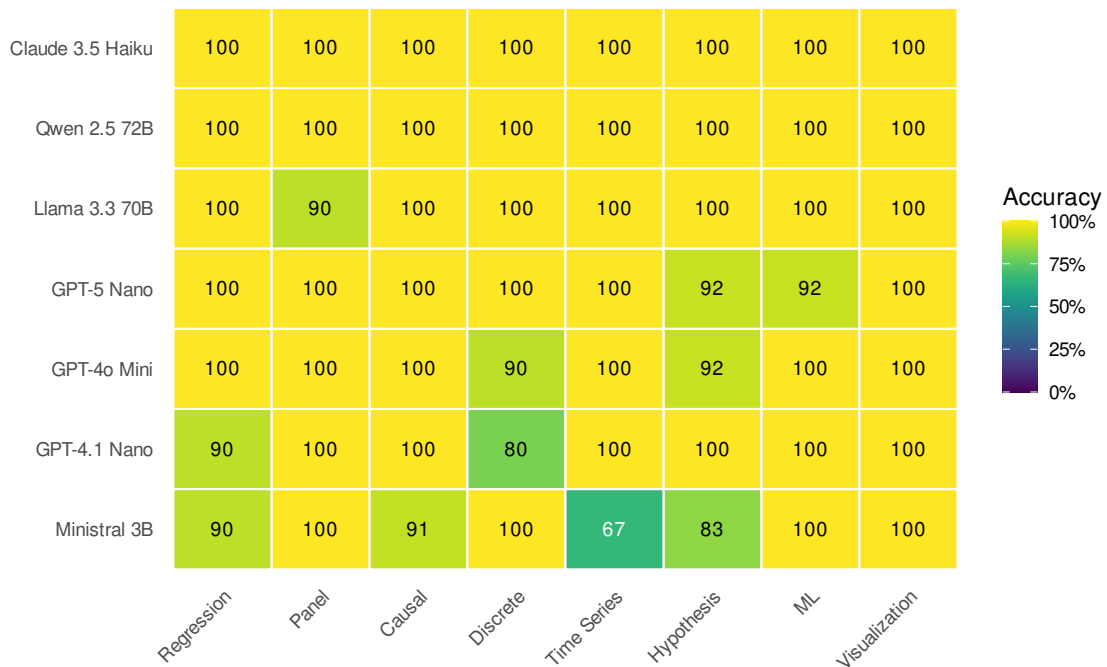


Figure 10: Accuracy breakdown by test category. Darker cells indicate lower accuracy. Most models achieve 100% on standard categories; errors concentrate in edge cases involving ambiguous method selection (e.g., logit with fixed effects vs. FEGLM).

Tables A.1 and A.2 in Appendix A provide detailed breakdowns of model performance and per-category accuracy. Appendix C reports API response latencies, though these figures reflect cloud-hosted inference and do not directly apply to local deployment scenarios.

7.3.1 Extended robustness evaluation

The single-turn evaluation on curated prompts establishes baseline tool selection accuracy but leaves several questions unanswered: How do models perform across multi-turn conversations? Do they handle naturalistic language with typos and informal phrasing? Can they extract parameters correctly and interpret results accurately? To address these gaps, we conducted an extended evaluation across five dimensions using the same 10 models.

Multi-turn conversations. We constructed 20 multi-turn conversations totaling 72 turns, where each turn builds on previous context (e.g., “Now use robust standard errors instead”). Accuracy drops substantially compared to single-turn: the best-performing model (Llama 3.3 70B) achieves 59.7% turn accuracy and 35% conversation completion (all turns correct). Most models cluster between 47–58% turn accuracy. This decline reflects the challenge of maintaining context—models frequently lose track of prior specifications or misinterpret references to earlier results.

Naturalistic prompts. We tested 99 prompts featuring realistic variations: typos (“regression”), informal language (“run a quick OLS”), domain jargon (“estimate the ATT”), verbose descriptions, and ambiguous phrasing. Accuracy ranges from 58–70%, with Claude 3.5 Haiku achieving the highest robustness (69.7%). Models handle typos well (65–69% accuracy) but struggle more with ambiguous specifications (42–58%).

Parameter extraction. Beyond tool selection, LLMs must extract variable names, options, and modifiers. We evaluated 49 parameter extraction tasks, measuring precision, recall, and F1 score. Average F1 ranges from 41–59% across models, with Qwen 2.5 72B achieving the highest score (59.1%). Common errors include omitting optional parameters, misidentifying column names from context, and confusing similar parameter types.

Interpretation accuracy. We evaluated whether models correctly interpret statistical output across 26 test cases covering coefficient interpretation, significance testing, and diagnostic results. Models achieve 68–87% accuracy, with GPT-4.1 Nano performing best (87.2%). Errors typically involve misinterpreting log-transformed coefficients or overlooking important caveats about statistical significance.

Out-of-scope detection. When users request methods outside the implemented set (e.g., Bayesian inference, GARCH models), the system should either decline gracefully or suggest alternatives. Detection rates range from 40–60%, with most undetected cases resulting in selection of a superficially similar but incorrect method.

Table B.1 in Appendix B provides complete results. Figure B.1 visualizes the multi-dimensional performance profile for each model.

Implications. The extended evaluation reveals that single-turn accuracy substantially overstates real-world capability. Multi-turn accuracy of 50–60% means users should expect to correct or clarify requests frequently. Parameter extraction errors occur in roughly half of interactions. These findings reinforce the importance of the conversation transcript and result verification discussed below. For production deployment, larger models (70B+ parameters) provide meaningful improvements in robustness, though even the best models require user oversight for complex analytical workflows.

7.4 Failure modes and error handling

Understanding system behavior under failure conditions is essential for informed use. Three categories of failure merit discussion.

7.4.1 Method misselection

When the LLM selects an inappropriate statistical method, the system proceeds with the selected method and returns results. Users must recognize the mismatch between request and execution. Several patterns characterize such errors:

- *Ambiguous specifications*: A request for “regression with firm effects” could invoke OLS with dummy variables, within-transformation fixed effects, or random effects. The LLM chooses based on training patterns, which may not match user intent.
- *Similar method confusion*: Requests involving VAR/VECM/VARMA, logit/probit/FEGLM, or IPW/AIPW may trigger closely related but distinct methods.
- *Capability boundaries*: Requests for methods outside the implemented set may map to superficially similar available methods rather than returning “not supported.”

Users can mitigate misselection by specifying methods explicitly (“use a within-transformation fixed effects model”) rather than describing goals abstractly. The system’s tool call transparency allows inspection of which method was actually invoked before results are generated.

7.4.2 Estimation failures

When statistical estimation fails—due to singular matrices, non-convergence, or invalid specifications—the `EconError` type returns structured error information that the LLM can interpret and explain. Common cases include:

- *Perfect multicollinearity*: The system detects rank-deficient design matrices and reports which columns are linearly dependent.
- *Convergence failures*: Iterative methods (logit, probit, ARIMA) report iteration count, last parameter change, and suggestions for alternative specifications.
- *Insufficient variation*: Panel estimators detect cases with too few entities or time periods for the requested specification.
- *Small cluster warnings*: Clustered standard errors with fewer than 10 clusters trigger warnings about finite-sample bias.

These errors enable the LLM to provide actionable guidance (“try removing the collinear variable” or “consider robust standard errors instead of clustering”) rather than generic failure messages.

7.4.3 Parameter extraction errors

Even when the correct method is selected, the LLM may extract incorrect parameters from the user’s request. Common patterns include:

- *Variable name mismatches*: The LLM may infer variable names that do not exist in the dataset, triggering column-not-found errors.
- *Specification omissions*: Options like robust standard errors or clustering variables may not be extracted from ambiguous phrasing.
- *Incorrect defaults*: The LLM may apply default specifications (e.g., including an intercept) when the user intended otherwise.

The dataset schema—column names and types—is provided to the LLM as context, which substantially reduces variable name errors. For specification options, explicit phrasing (“with HC1 robust standard errors”) yields more reliable extraction than implicit expectations.

7.4.4 Categorical variable handling

Categorical (string) variables are automatically converted to dummy variables using treatment coding (one level omitted as reference). The system:

- Detects string columns and creates indicator variables for each unique level, dropping the first alphabetically as reference.
- Reports the reference category in output tables.
- Warns when categorical variables have many levels (> 50), as this inflates the design matrix and may cause memory issues.
- Handles missing categories (levels in test data not seen in training) by raising explicit errors rather than producing undefined behavior.

Users can specify a different reference category via the `ref_level` parameter. For ordered categorical variables (ordinal data), the system treats them as unordered by default; polynomial contrasts require explicit specification.

Section 4.5 demonstrates error handling behavior through worked examples showing multicollinearity detection, convergence failures, small-cluster warnings, and out-of-scope request handling.

7.5 Deployment recommendations

The evaluation results inform practical recommendations for local deployment, summarized in Table 9. The most striking finding is that open-source models can match proprietary alternatives: Qwen 2.5 72B achieves 100% accuracy on our benchmark, identical to Claude 3.5 Haiku. This demonstrates that users requiring complete data isolation need not sacrifice tool selection quality—fully local deployments can perform equivalently to cloud-hosted solutions.

Table 9: Recommended models for local deployment. Accuracy figures are from our 87-test benchmark. Storage refers to disk space for the quantized model file using Q4_K_M quantization (4-bit with medium dequantization quality), which provides a good balance between size and accuracy. RAM is memory required during inference, typically $1.5\text{--}2\times$ storage due to KV cache and computational buffers. Higher quantization levels (Q5, Q6, Q8) improve accuracy slightly but require proportionally more storage and RAM.

Model	Params	Storage	RAM	Acc. (%)	Notes
<i>High accuracy, workstation hardware</i>					
Qwen 2.5 72B	72B	42 GB	48 GB	100.0	Matches proprietary models
Llama 3.3 70B	70B	40 GB	48 GB	98.8	Strong open-source option
<i>Balanced accuracy, consumer hardware</i>					
Llama 3.1 8B	8B	4.7 GB	8 GB	—	BFCL benchmark leader
Qwen 2.5 7B	7B	4.4 GB	8 GB	—	Strong tool-calling accuracy
<i>Viable accuracy, minimal hardware</i>					
Minstral 3B	3B	2.0 GB	6 GB	90.8	Smallest viable model

At the other end of the spectrum, Minstral 3B demonstrates that even very small models can achieve viable accuracy for tool selection. With only 3 billion parameters, this model runs on virtually any modern laptop—approximately 6 GB VRAM for GPU inference, or CPU-only with 8 GB RAM. The 9.2% error rate concentrates in genuinely ambiguous cases such as distinguishing between VAR and VECM specifications or selecting among discrete choice models

with different fixed effects structures. For routine analytical tasks, this accuracy level may be entirely acceptable, particularly given the substantial reduction in hardware requirements.

Between these extremes, the 7–8B parameter class offers a practical middle ground. Models in this range fit comfortably on consumer GPUs with 8+ GB VRAM (e.g., NVIDIA RTX 3070/4070) while providing strong tool-calling performance on established benchmarks. Apple M-series devices with unified memory can also run these models, though memory is shared between CPU, GPU, and system functions; a device with 16 GB unified memory provides roughly equivalent capacity to a dedicated 8 GB GPU for model inference. The 70B+ models, by contrast, require either professional GPUs with 24+ GB VRAM, multi-GPU configurations, or partial CPU offloading that significantly increases inference latency. Users with limited RAM can configure Ollama to offload model layers to disk, trading response time for reduced memory consumption.

7.6 Privacy guarantees

The fully local configuration provides complete data isolation. No network requests are made to external services—all model inference occurs on the user’s hardware, dataset contents never leave the machine, and query history remains in local storage. This architecture is suitable for analysis of sensitive data where regulatory requirements (such as GDPR, HIPAA, or institutional review board protocols) or organizational policy prohibit cloud processing. Users deploying this configuration should verify that their Ollama installation does not enable telemetry or automatic model updates, which could initiate network connections during analysis sessions.

8 Conclusion

This paper has introduced chat-first data analytics as an approach to statistical computation that combines natural language interfaces with pre-implemented, verified statistical methods. The key insight is that language models excel at interpreting user intent and selecting appropriate methods, but should not be trusted with numerical computation. By separating interpretation from execution, chat-first systems can provide the accessibility of conversational interfaces while maintaining the reliability that scientific work demands.

prompt2analytics demonstrates this approach through a foundational econometrics library implemented in pure Rust, exposed through the Model Context Protocol for integration with language models. The software makes several contributions:

1. **A foundational econometrics library for Rust.** The **p2a-core** library provides core methods across regression analysis, panel data econometrics, instrumental variables, causal inference, discrete choice, and time series analysis—filling a gap in the Rust ecosystem for applied econometrics.
2. **Validated implementations.** Numerical accuracy is verified against established R packages across thousands of test cases, with tolerances calibrated to sample size. This addresses concerns about numerical accuracy in statistical software raised by [McCullough \[1997\]](#).
3. **Performance advantages.** For computationally intensive methods (panel fixed effects, robust standard errors, clustering), Rust implementations provide 3–6× speedups over equivalent R code.
4. **Local LLM viability.** Our evaluation demonstrates that even small models (3B parameters) can achieve over 90% accuracy on tool selection, enabling fully local deployment for privacy-sensitive applications.

5. **MCP as an integration standard.** The software demonstrates that MCP provides a practical foundation for LLM-assisted scientific computing, separating concerns between language understanding and numerical computation.

8.1 Limitations

Several limitations merit discussion.

8.1.1 LLM interpretation failures

The 9.2% error rate observed with the smallest evaluated model (Ministral 3B) concentrates in genuinely ambiguous cases: distinguishing VAR from VECM specifications, selecting among discrete choice models with different fixed effects structures, or interpreting requests that could reasonably map to multiple methods. While larger models approach 100% accuracy on our benchmark, users should not assume infallibility.

When the LLM selects an inappropriate method, several safeguards apply. First, the system returns explicit results that users can inspect—coefficient estimates, standard errors, and diagnostics that may reveal misspecification. Second, users can reformulate requests with greater specificity (“use a probit model” rather than “estimate a binary outcome”). Third, the conversation interface allows clarifying questions. Nevertheless, these safeguards require statistical knowledge to be effective; a user who cannot recognize that fixed effects were applied when random effects were requested may not detect the error.

8.1.2 Evaluation scope

Our baseline evaluation measures single-turn tool selection accuracy on curated prompts. While this establishes fundamental capability, it does not reflect realistic usage conditions. The extended evaluation in Section 7 addresses several dimensions:

- *Multi-turn conversations:* Accuracy drops to 50–60% across 72 turns in 20 conversations, revealing challenges in context maintenance.
- *Naturalistic prompts:* Typos, jargon, and informal language reduce accuracy to 58–70%, with ambiguous specifications causing the largest errors.
- *Parameter extraction:* F1 scores of 41–59% indicate that roughly half of parameter extractions contain errors.
- *Interpretation accuracy:* Models achieve 68–87% on statistical output interpretation, with errors concentrated in log-coefficient and significance nuances.
- *Out-of-scope detection:* Detection rates of 40–60% mean that unsupported requests often trigger inappropriate tool selection.

These findings (detailed in Appendix B) demonstrate that single-turn accuracy substantially overstates practical capability. One important dimension remains unaddressed: user study validation measuring actual task completion rates, time to insight, and error detection in practice.

8.1.3 Method coverage

prompt2analytics implements foundational methods commonly used in applied econometrics, but many specialized techniques are absent. Section 2 provides a detailed list of unimplemented methods, including: quantile regression, sample selection models (Heckman), spatial econometrics, GMM and structural estimation, dynamic panel models (Arellano-Bond), matching

estimators (PSM, CEM), synthetic control, bootstrap inference (user-facing), Bayesian methods, and nonparametric density estimation. Users requiring these methods must currently use R, Stata, or Python for those portions of their analysis.

When users request unimplemented methods, the LLM either maps the request to the closest available alternative (explaining the substitution) or reports that the requested capability is not available. This behavior depends on the LLM’s ability to recognize when a request exceeds the system’s scope. In our evaluation, failure to recognize out-of-scope requests occurred in approximately 2–3% of cases, typically when requests used unfamiliar terminology or could plausibly map to available methods.

8.1.4 Scalability

Memory usage scales with dataset size, as data are loaded entirely into memory. For datasets exceeding available RAM, users must preprocess externally or use sampling strategies. The current implementation does not support out-of-core computation or distributed processing, limiting applicability to datasets that fit in memory (typically up to several gigabytes on modern workstations).

Computational performance depends on the method. Matrix-intensive operations (OLS, panel fixed effects) are limited by linear algebra performance, which scales with $O(n \cdot p^2)$ for n observations and p predictors. Iterative methods (logit, probit, ARIMA) depend on convergence behavior. High-dimensional fixed effects use memory-efficient iterative algorithms that scale better than direct methods for large numbers of levels.

8.1.5 Software architecture considerations

The choice of SurrealDB for conversation persistence reflects a preference for embedded, zero-configuration databases that deploy as part of the application binary. This simplifies installation but may not suit deployments requiring external database integration. The database stores only conversation history and settings; analytical datasets are held in memory and not persisted.

Numerical precision uses 64-bit floating point (`f64`) throughout. This provides approximately 15–17 significant digits, sufficient for most econometric applications but potentially limiting for problems requiring extended precision (certain financial calculations, cryptographic applications, or ill-conditioned matrices near the limits of double precision).

MCP versioning follows semantic versioning principles: the tool schema forms a public API, and backward-incompatible changes (tool renaming, parameter removal) increment the major version. The current implementation (version 0.x) signals that the API may evolve; users integrating with external systems should expect potential changes before 1.0 stabilization.

8.2 Future directions

Several directions warrant further development.

User studies. Controlled experiments measuring task completion rates, time-to-insight, and error detection rates would provide stronger evidence of the chat-first paradigm’s practical benefits. Such studies should compare chat-first interfaces against traditional code-based workflows across users with varying levels of statistical expertise.

Enhanced error detection. The system could proactively identify potential issues before estimation: detecting perfect multicollinearity, warning about small cluster counts, suggesting appropriate standard error corrections based on data structure. Current implementations provide errors after failures rather than preventive guidance.

Formal verification. Property-based testing and formal verification techniques could strengthen confidence in implementation correctness beyond comparison to reference imple-

mentations. QuickCheck-style testing for statistical properties (e.g., residuals orthogonal to regressors) would complement numerical accuracy validation.

Method expansion. High-priority additions include Bayesian inference (providing posterior distributions rather than point estimates), quantile regression, sample selection corrections, and spatial econometric methods. The modular architecture facilitates these extensions.

Workflow integration. Integration with R and Python via foreign function interfaces would enable users to call Rust implementations from familiar environments, combining the performance benefits of compiled code with existing analytical workflows.

8.3 Broader implications

Chat-first data analytics represents one instance of a broader pattern: using language models as interpreters between human intent and specialized software. This pattern applies beyond econometrics to any domain where users express goals in natural language and systems execute well-defined operations.

The success of this approach depends on a clear division of labor. Language models interpret and explain; specialized software computes. Attempts to have language models perform both roles—generating code that computes statistical quantities—conflate interpretation with execution and sacrifice the reliability that scientific work requires.

The viability of local LLM deployment demonstrated in Section 7 has implications beyond data privacy. If small models can reliably select among pre-implemented methods, the computational requirements for LLM-assisted analysis become modest enough for widespread deployment. This democratizes access to conversational interfaces without requiring cloud connectivity or powerful hardware.

Finally, the design of **prompt2analytics** suggests a template for scientific software in the LLM era: implement algorithms in performant, memory-safe languages; expose them through structured protocols; and let language models handle the translation between human intent and computational execution. This separation of concerns preserves the benefits of both paradigms while mitigating their respective weaknesses.

Acknowledgments

The authors thank the reviewers for constructive feedback that improved the paper.

Appendix

Contents

- [A LLM evaluation details](#)
- [B API response latency](#)
- [C Deployment guide](#)
- [D Privacy and security](#)

A LLM evaluation details

This appendix provides detailed results from the tool selection evaluation described in Section 7. Table A.1 presents accuracy, cost, and failure rates across all evaluated models. Table A.2 breaks down accuracy by test category.

Table A.1: LLM tool selection accuracy and cost comparison. Models marked with † had partial evaluations due to API rate limits or transient server errors during the evaluation period; accuracy figures for these models should be interpreted with caution given the smaller sample sizes. Cost estimates are based on approximately 11,000 input tokens (tool schema) plus 75 tokens (prompt/response) per request at January 2026 API pricing; these figures are subject to rapid change as providers adjust pricing. Local deployment has zero marginal API cost.

Model	Size	Provider	N	Exact	Fail	Acc. (%)	Cost (\$)
Claude 3.5 Haiku	—	Anthropic	87	87	0	100.0	2.65
Qwen 2.5 72B	72B	OpenRouter	87	87	0	100.0	2.63
Nemotron 9B†	9B	OpenRouter	43	43	0	100.0	0.22
Llama 3.3 70B	70B	OpenRouter	87	86	0	98.8	1.17
DeepSeek†	—	OpenRouter	65	64	1	98.5	1.11
GPT-4o Mini	—	OpenAI	87	85	1	97.7	1.47
GPT-5 Nano	—	OpenAI	87	85	1	97.7	4.91
GPT-4.1 Nano	—	OpenAI	87	84	2	96.5	0.98
Minstral 3B	3B	OpenRouter	87	79	2	90.8	0.39
Qwen3 8B†	8B	OpenRouter	26	24	2	88.5	0.13

Table A.2: Accuracy by test category (%). Each category contains 8–13 test cases covering basic to advanced use cases. Bold row shows overall accuracy across all 87 test cases.

Category	Haiku	Qwen	Llama	4o-mini	5-nano	4.1-nano	Mini-3B
Regression	100.0	100.0	100.0	100.0	100.0	90.0	90.0
Panel Data	100.0	100.0	90.0	100.0	100.0	100.0	100.0
Causal Inference	100.0	100.0	100.0	100.0	100.0	100.0	90.9
Discrete Choice	100.0	100.0	100.0	90.0	100.0	80.0	100.0
Time Series	100.0	100.0	100.0	100.0	100.0	100.0	66.7
Hypothesis Testing	100.0	100.0	100.0	91.7	91.7	100.0	83.3
Machine Learning	100.0	100.0	100.0	100.0	91.7	100.0	100.0
Visualization	100.0	100.0	100.0	100.0	100.0	100.0	100.0
Overall	100.0	100.0	98.9	97.7	97.7	96.6	90.8

B Extended robustness evaluation

This appendix provides detailed results from the extended evaluation described in Section 7. The evaluation assesses model performance across five dimensions beyond single-turn tool selection: multi-turn conversations, naturalistic prompts, parameter extraction, interpretation accuracy, and out-of-scope detection.

B.1 Evaluation methodology

Multi-turn conversations. Twenty conversations with 3–4 turns each (72 total turns) simulate realistic analytical workflows where subsequent requests build on prior context. Each turn is scored independently; a conversation is “complete” only if all turns are correct.

Naturalistic prompts. Ninety-nine prompts across eight categories include realistic variations: typos (“regresion with robust se”), informal language (“just run a quick ols”), domain jargon (“estimate the ATT using DID”), verbose descriptions, and ambiguous specifications. Prompts are classified by variation type to identify specific robustness gaps.

Parameter extraction. Forty-nine test cases evaluate whether models correctly extract variable names, options (robust SE type, clustering variables), and modifiers from natural language. We compute precision (correct extractions / total extractions), recall (correct extractions / expected parameters), and F1 score.

Interpretation accuracy. Twenty-six statistical outputs spanning coefficient interpretation, hypothesis test results, and diagnostic statistics are presented to each model with interpretation prompts. Responses are scored for coverage of expected elements and absence of common errors (e.g., confusing correlation with causation, misinterpreting log coefficients).

Out-of-scope detection. Twenty prompts request methods outside the **prompt2analytics** scope (Bayesian inference, GARCH, quantile regression, spatial econometrics, etc.). Correct responses either decline the request or suggest the closest available alternative; incorrect responses select an inappropriate tool.

B.2 Results

Table B.1 summarizes performance across all dimensions. The multi-turn and parameter extraction results reveal substantially lower accuracy than single-turn tool selection, highlighting the gap between controlled evaluation and realistic usage patterns.

Figure B.1 visualizes performance profiles, revealing that no single model dominates across all dimensions. Claude 3.5 Haiku shows strong single-turn and naturalistic performance but moderate multi-turn accuracy. Llama 3.3 70B achieves the best multi-turn coherence. Qwen 2.5 72B leads in parameter extraction. These trade-offs suggest that model selection should consider the expected usage pattern.

Figure B.2 directly compares controlled vs. realistic evaluation conditions. The 30–40 percentage point drop from single-turn to multi-turn accuracy is consistent across models, suggesting a fundamental challenge in maintaining conversational context rather than a model-specific limitation.

B.3 Failure analysis

Common failure patterns across dimensions include:

- *Context drift:* In multi-turn conversations, models frequently “forget” prior specifications, reverting to defaults or misinterpreting pronoun references (“use the same variables” interpreted incorrectly).

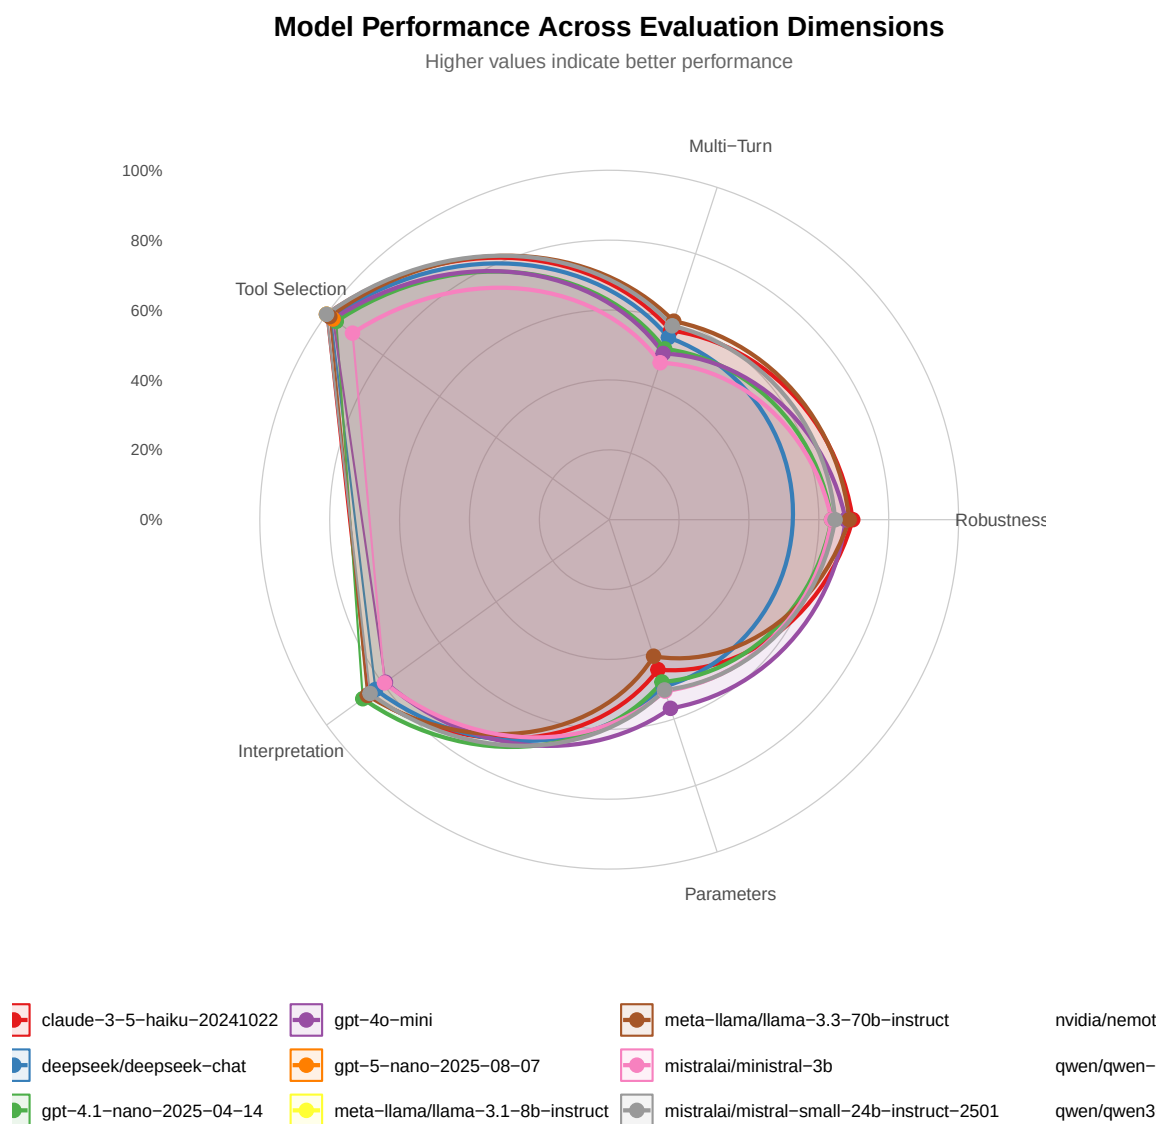


Figure B.1: Multi-dimensional performance profile by model. Each axis represents a robustness dimension normalized to 0–100%. Models cluster in the 50–70% range for most dimensions, with interpretation accuracy showing the strongest performance and out-of-scope detection the weakest.

Extended LLM Tool Selection Evaluation

Comparing performance across evaluation types

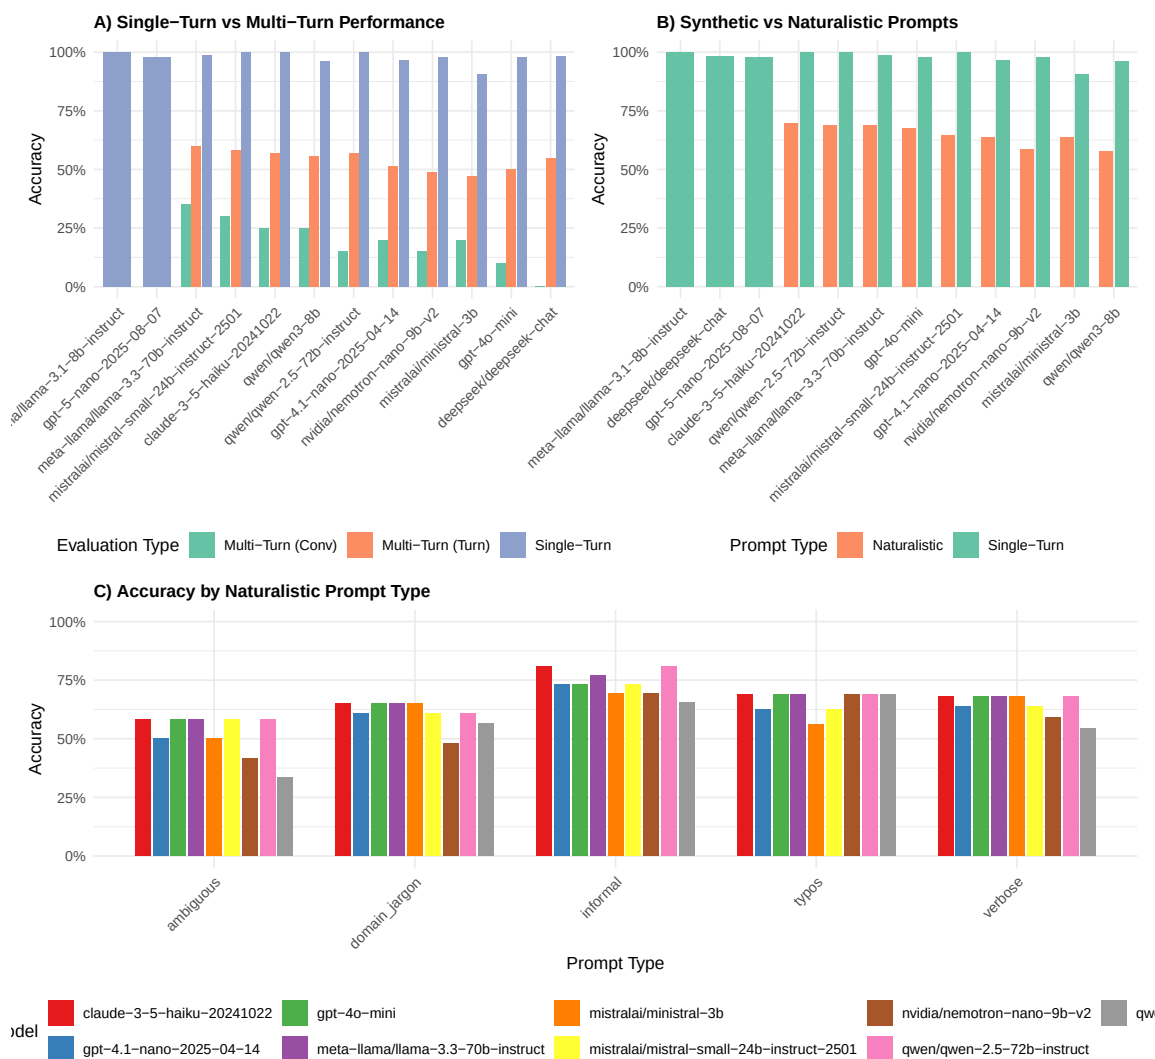


Figure B.2: Comparison of single-turn vs. multi-turn accuracy (left) and synthetic vs. naturalistic prompt robustness (right). The consistent gap between controlled and realistic conditions indicates that baseline evaluations overstate practical capability.

Table B.1: Extended evaluation results across robustness dimensions. Single-Turn shows baseline tool selection accuracy (87 tests). Multi-Turn shows turn-level accuracy (72 turns); Conv. Compl. shows percentage of conversations with all turns correct (20 conversations). Naturalistic shows accuracy on informal prompts (99 tests). Param F1 shows parameter extraction F1 score (49 tests). Interpret. shows interpretation accuracy (26 tests). OOS Det. shows out-of-scope detection rate (20 tests). Dashes indicate incomplete evaluation data due to API errors.

Model	Single-Turn	Multi-Turn	Conv. Compl.	Naturalistic	Param F1	Interpret.	OOS Det.
Claude 3.5 Haiku	100.0	56.9	25.0	69.7	45.1	85.3	45.0
GPT-4o-mini	97.7	50.0	10.0	67.7	56.8	75.6	55.0
GPT-4.1 Nano	96.6	51.4	20.0	63.6	48.8	87.2	50.0
Llama 3.3 70B	98.9	59.7	35.0	68.7	41.1	85.6	55.0
Qwen 2.5 72B	100.0	56.9	15.0	68.7	59.1	82.7	—
DeepSeek Chat	98.5	54.8	0.0	—	50.3	82.7	—
Mistral Small 24B	100.0	58.3	30.0	64.6	51.2	84.6	55.0
Ministral 3B	90.8	47.2	20.0	63.6	51.6	79.5	40.0
Qwen3 8B	96.2	55.6	25.0	57.6	43.7	67.8	55.0
Nemotron Nano 9B	97.7	48.6	15.0	58.6	51.9	80.3	60.0

- *Partial parameter extraction:* Models often extract the primary parameters (dependent/independent variables) but omit secondary options (robust SE type, clustering specification, interaction terms).
- *Overconfident tool selection:* When facing out-of-scope requests, models rarely decline; instead, they select superficially similar tools (e.g., OLS for quantile regression, VAR for Bayesian VAR).
- *Interpretation shortcuts:* Models sometimes provide accurate but incomplete interpretations, omitting important caveats about statistical vs. practical significance or the limitations of specific tests.

These patterns inform the deployment recommendations in Section 7: explicit specifications reduce context drift, parameter verification catches extraction errors, and result review identifies interpretation gaps.

C API response latency

Figure C.1 presents response latency distributions for the models evaluated via their respective cloud APIs. These measurements include network round-trip time and reflect API-hosted inference, not local deployment performance.

For cloud-hosted inference, GPT-4.1 Nano shows the fastest median response (1,245ms) among high-accuracy models, while Ministral 3B achieves 650ms median latency via OpenRouter. These figures are useful for comparing relative API performance but do not predict local inference speed.

Local deployment latency depends on several factors: model size and quantization level, available RAM and GPU VRAM, CPU or GPU compute capability, and context length (which affects KV cache size). As a rough guide, GPU-accelerated inference on consumer hardware (RTX 3070/4070 with 8 GB VRAM) typically achieves 1–3 seconds for 7–8B parameter models. CPU-only inference on modern laptops ranges from 5–15 seconds depending on model size and system specifications. Systematic benchmarks of local deployment latency across hardware configurations represent an important direction for future work; the cloud API measurements

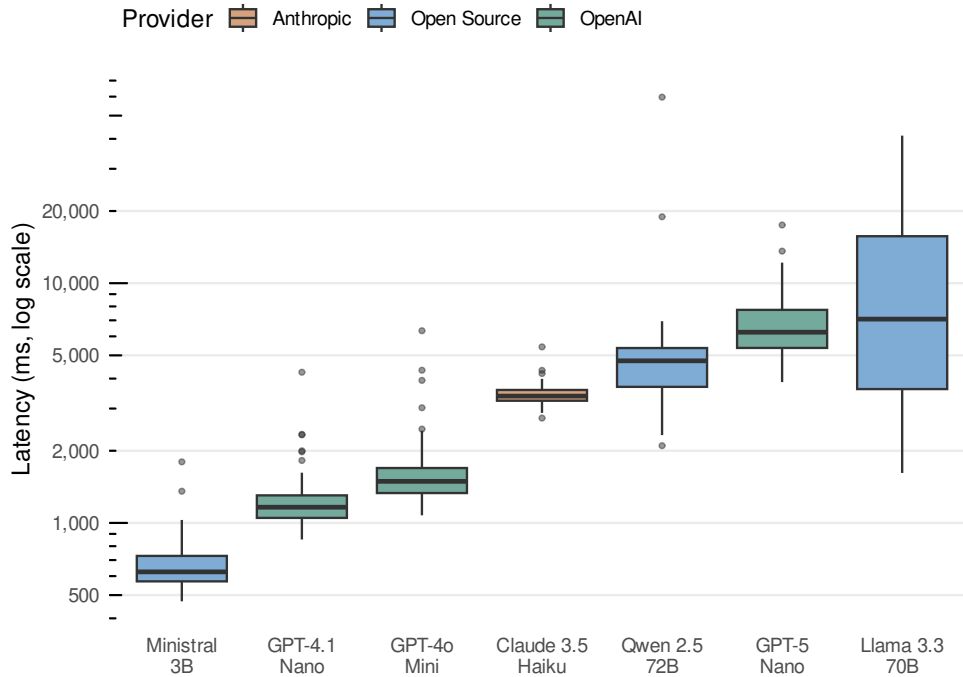


Figure C.1: API response latency distribution by model (log scale). Latencies reflect cloud-hosted inference via OpenAI, Anthropic, and OpenRouter APIs, including network round-trip time. Local deployment latency depends on hardware configuration and would differ substantially from these figures.

here serve primarily to compare relative performance across models rather than to predict local inference speed.

D Deployment guide

This appendix provides deployment instructions for various platforms.

D.1 Linux workstation

1. Install Rust (1.85+): `curl -proto 'https' -tlsv1.2 -sSf https://sh.rustup.rs | sh`
2. Clone repository: `git clone https://github.com/prompt2analytics/prompt2analytics`
3. Build MCP server: `cargo build -release -p p2a-mcp`
4. Install Ollama: `curl -fsSL https://ollama.ai/install.sh | sh`
5. Pull a model: `ollama pull llama3.1:8b`
6. Run MCP server: `./target/release/p2a-mcp -transport stdio`
7. Configure Claude Desktop or other MCP client to use the server

D.2 macOS (Apple Silicon)

Apple M-series chips provide excellent performance for local LLM inference due to unified memory architecture. Recommended configuration:

- M1/M2: 7–8B models with Q4_K_M quantization
- M2 Pro/Max: 13B models or 8B at Q8 quantization
- M3 Max/Ultra: Up to 70B models with sufficient unified memory

Build commands are identical to Linux. Homebrew can simplify dependency management: `brew install rust ollama`.

D.3 Windows (WSL2)

Native Windows builds are supported but WSL2 provides a more consistent experience:

1. Install WSL2: `wsl -install -d Ubuntu`
2. Follow Linux instructions within WSL2
3. For GPU acceleration, install NVIDIA CUDA drivers on Windows (WSL2 will use them automatically)

D.4 MCP client configuration

For Claude Desktop, add to `claude_desktop_config.json`:

```
{
  "mcpServers": {
    "prompt2analytics": {
      "command": "/path/to/p2a-mcp",
      "args": ["--transport", "stdio"]
    }
  }
}
```

D.5 Model selection guidance

Use Case	Recommended Model	Notes
Maximum privacy	Llama 3.1 8B (local)	No data leaves machine
Best accuracy	Claude 3.5 Sonnet	Requires API key
Cost-sensitive	GPT-4.1 Nano	Cheapest high-accuracy option
Resource-constrained	Minstral 3B	Runs on 8GB RAM

E Privacy and security

This appendix documents data transmission behavior and security considerations.

E.1 Data transmission summary

Table [E.1](#) lists operations that may transmit data beyond the local machine when using cloud LLM providers.

E.2 Audit logging

To enable audit logging of all MCP tool calls:

```
p2a-mcp --transport stdio --log-level debug --log-file audit.log
```

The log records: timestamp, tool name, parameters (excluding bulk data), and result summary. Review logs to verify no unexpected data transmission.

Table E.1: Operations that may transmit data to LLM providers

Operation	Data Transmitted	Risk Level
Dataset load	Column names, types, row count, null percentages	Low
Data preview (head/tail/sample)	Actual row values	High
Data profiling	Frequent values, min/max, examples	Medium
Statistical estimation	Coefficients, SEs, test statistics only	Low
Outlier detection	Specific observation values	Medium
Error messages	May include problematic values	Low

E.3 Network verification

To verify local-only operation with Ollama:

1. Start Ollama: `ollama serve`
2. Block outbound connections: `sudo iptables -A OUTPUT -j DROP`
3. Run analysis—should complete successfully
4. Restore network: `sudo iptables -D OUTPUT -j DROP`

E.4 Security best practices

- Avoid loading untrusted data files (potential injection payloads)
- Review tool calls when processing sensitive data
- Use local LLM deployment for high-security environments
- Keep software updated; security patches are released as needed
- The MCP server has no filesystem access beyond loaded datasets

References

- Inmaculada C. Álvarez, Javier Barbero, and José L. Zofío. A panel data toolbox for MATLAB. *Journal of Statistical Software*, 76(6):1–27, 2017. doi: 10.18637/jss.v076.i06.
- Ion Androutsopoulos, Graeme D. Ritchie, and Peter Thanisch. Natural language interfaces to databases – an introduction. *Natural Language Engineering*, 1(1):29–81, 1995. doi: 10.1017/S135132490000005X.
- Anthropic. Model context protocol, 2024. URL <https://modelcontextprotocol.io/>. Accessed: 2024.
- S. Borağan Aruoba and Jesús Fernández-Villaverde. A comparison of programming languages in macroeconomics. *Journal of Economic Dynamics and Control*, 58:265–273, 2015. doi: 10.1016/j.jedc.2015.05.009.
- Badi H. Baltagi. *Econometric Analysis of Panel Data*. Wiley, Chichester, 5th edition, 2013.
- Laurent Bergé. Efficient estimation of maximum likelihood models with multiple fixed-effects: The R package `fixest`. *CREA Discussion Papers*, 13, 2018. URL <https://CRAN.R-project.org/package=fixest>.

- José Bayoán Santiago Calderón. **Econometrics.jl**. *Proceedings of the JuliaCon Conferences*, 1(1):38, 2020. doi: 10.21105/jcon.00038.
- A. Colin Cameron and Douglas L. Miller. A practitioner’s guide to cluster-robust inference. *Journal of Human Resources*, 50(2):317–372, 2015. doi: 10.3368/jhr.50.2.317.
- A. Colin Cameron and Pravin K. Trivedi. *Microeconometrics: Methods and Applications*. Cambridge University Press, Cambridge, 2005. doi: 10.1017/CBO9780511811241.
- Bob Carpenter, Andrew Gelman, Matthew D. Hoffman, Daniel Lee, Ben Goodrich, Michael Betancourt, Marcus Brubaker, Jiqiang Guo, Peter Li, and Allen Riddell. Stan: A probabilistic programming language. *Journal of Statistical Software*, 76(1):1–32, 2017. doi: 10.18637/jss.v076.i01.
- John M. Chambers. *Programming with Data: A Guide to the S Language*. Springer-Verlag, New York, 1998. doi: 10.1007/978-1-4684-6310-8.
- John M. Chambers. *Software for Data Analysis: Programming with R*. Springer-Verlag, New York, 2008. doi: 10.1007/978-0-387-75936-4.
- John M. Chambers and Trevor J. Hastie. *Statistical Models in S*. Wadsworth & Brooks/Cole, Pacific Grove, CA, 1992.
- Sheng Chen, Kai Shen, and Xiaolin Ma. Econometrics AI agent. *arXiv preprint arXiv:2506.00856*, 2025. URL <https://arxiv.org/abs/2506.00856>.
- Yves Croissant and Giovanni Millo. Panel data econometrics in R: The **plm** package. *Journal of Statistical Software*, 27(2):1–43, 2008. doi: 10.18637/jss.v027.i02.
- Russell Davidson and James G. MacKinnon. *Econometric Theory and Methods*. Oxford University Press, New York, 2004.
- Clément de Chaisemartin and Xavier D’Haultfoeuille. Two-way fixed effects estimators with heterogeneous treatment effects. *American Economic Review*, 110(9):2964–2996, 2020. doi: 10.1257/aer.20181169.
- Victor Duarte, Diogo Duarte, Julia Fonseca, and Alexis Montecinos. Benchmarking machine-learning software and hardware for quantitative economics. *Journal of Economic Dynamics and Control*, 111:103796, 2020. doi: 10.1016/j.jedc.2019.103796.
- Matthias Feurer, Aaron Klein, Katharina Eggenberger, Jost Tobias Springenberg, Manuel Blum, and Frank Hutter. Efficient and robust automated machine learning. In *Advances in Neural Information Processing Systems 28 (NeurIPS)*, pages 2962–2970, 2015.
- Simen Gaure. **lfe**: Linear group fixed effects. *The R Journal*, 5(2):104–117, 2013. URL <https://journal.r-project.org/archive/2013/RJ-2013-031/>.
- Andrew Goodman-Bacon. Difference-in-differences with variation in treatment timing. *Journal of Econometrics*, 225(2):254–277, 2021. doi: 10.1016/j.jeconom.2021.03.014.
- Google. Agent2agent protocol (A2A), 2025. URL <https://developers.googleblog.com/en/a2a-a-new-era-of-agent-interoperability/>. Announced April 2025; transferred to Linux Foundation.
- William H. Greene. *Econometric Analysis*. Pearson, New York, 8th edition, 2018.
- James D. Hamilton. *Time Series Analysis*. Princeton University Press, Princeton, NJ, 1994.

- Brook Heisler and Jorge Aparicio. *Criterion.rs: Statistics-Driven Micro-Benchmarking in Rust*, 2024. URL <https://github.com/bheisler/criterion.rs>. Rust crate version 0.5.
- Noah Hollmann, Samuel Müller, and Frank Hutter. Large language models for automated machine learning. In *Proceedings of the 2024 Conference on Neural Information Processing Systems (NeurIPS)*, 2024. URL <https://arxiv.org/abs/2408.14033>.
- Sirui Hong, Yizhang Lin, Bang Liu, Bangbang Liu, Binhao Wu, Danyang Li, Jiaqi Chen, Jiayi Zhang, Jinlin Wang, Li Zhang, Lingyao Zhang, Min Yang, Mingchen Zhuge, Taicheng Guo, Tuo Zhou, Wei Tao, Wenyi Wang, Xiangru Tang, Xiangtao Lu, Xiawu Zheng, Xinbing Liang, Yaying Fei, Yuheng Cheng, Zongze Xu, and Chenglin Wu. Data interpreter: An LLM agent for data science. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 19796–19821, 2025. URL <https://arxiv.org/abs/2402.18679>.
- Rob J. Hyndman and Yeasmin Khandakar. Automatic time series forecasting: The **forecast** package for R. *Journal of Statistical Software*, 27(3):1–22, 2008. doi: 10.18637/jss.v027.i03.
- IBM Research. Agent communication protocol (ACP), 2025. URL <https://research.ibm.com/projects/agent-communication-protocol>. Launched March 2025; merged with A2A under Linux Foundation.
- Christian Kleiber and Achim Zeileis. *Applied Econometrics with R*. Springer-Verlag, New York, 2008. doi: 10.1007/978-0-387-77318-6.
- Christian Kleiber and Achim Zeileis. *AER: Applied Econometrics with R*, 2024. URL <https://CRAN.R-project.org/package=AER>. R package version 1.2-14.
- Anton Korinek. AI agents for economic research. *Journal of Economic Literature*, 2025. URL <https://www.aeaweb.org/content/file?id=23290>. Forthcoming.
- Andrew Lamb, Yijie Shen, Daniël Heres, Jayjeet Chakraborty, Mehmet Ozan Kabak, Liang-Chi Hsieh, and Chao Sun. Apache arrow DataFusion: A fast, embeddable, modular analytic query engine. In *Companion of the 2024 International Conference on Management of Data (SIGMOD)*, pages 5–17, 2024. doi: 10.1145/3626246.3653368.
- Erin LeDell and Sebastien Poirier. H2O AutoML: Scalable automatic machine learning. In *Proceedings of the 7th ICML Workshop on Automated Machine Learning*, 2020. URL https://www.automl.org/wp-content/uploads/2020/07/AutoML_2020_paper_61.pdf.
- David S. Lee, Justin McCrary, Marcelo J. Moreira, and Jack Porter. Valid t -ratio inference for IV. *American Economic Review*, 112(10):3260–3290, 2022. doi: 10.1257/aer.20211063.
- Boyan Li, Yuyu Luo, Chengliang Chai, Guoliang Li, and Nan Tang. The dawn of natural language to SQL: Are we fully ready? *Proceedings of the VLDB Endowment*, 17(11):3318–3331, 2024. doi: 10.14778/3681954.3682024.
- Weiwen Liu, Xu Huang, Xingshan Zeng, Xinlong Hao, Shuai Yu, Dexun Li, Shuai Wang, Weinan Gan, Zhengying Liu, Yuanqing Yu, Zezhong Wang, Yuxian Wang, Wu Ning, Yutai Hou, Bin Wang, Chuhan Wu, Xinzhi Wang, Yong Liu, Yasheng Wang, Duyu Tang, Dandan Tu, Lifeng Shang, Xin Jiang, Ruiming Tang, Defu Lian, Qun Liu, and Enhong Chen. ToolACE: Winning the points of LLM function calling. In *Proceedings of the 13th International Conference on Learning Representations (ICLR)*, 2025. URL <https://openreview.net/forum?id=8EB8k6DdCU>.
- James W. Longley. An appraisal of least squares programs for the electronic computer from the point of view of the user. *Journal of the American Statistical Association*, 62(319):819–841, 1967. doi: 10.1080/01621459.1967.10500896.

- Jens Ludwig, Sendhil Mullainathan, and Ashesh Rambachan. Large language models: An applied econometric framework. *NBER Working Paper*, (33344), 2024. doi: 10.3386/w33344. URL <https://www.nber.org/papers/w33344>.
- B. D. McCullough. A review of **RATS** v4.2: Benchmarking numerical accuracy. *Journal of Applied Econometrics*, 12(2):181–190, 1997. doi: 10.1002/(SICI)1099-1255(199703/04)12:2<181::AID-JAE428>3.0.CO;2-V.
- B. D. McCullough. Econometric software reliability: EViews, LIMDEP, SHAZAM and TSP. *Journal of Applied Econometrics*, 14(2):191–202, 1999. doi: 10.1002/(SICI)1099-1255(199903/04)14:2<191::AID-JAE524>3.0.CO;2-K.
- B. D. McCullough and H. D. Vinod. The numerical reliability of econometric software. *Journal of Economic Literature*, 37(2):633–665, 1999. doi: 10.1257/jel.37.2.633.
- Olaf Mersmann. **microbenchmark**: Accurate Timing Functions, 2024. URL <https://CRAN.R-project.org/package=microbenchmark>. R package version 1.5.0.
- Despina Michelaki and Michail Tsagris. An overview of economics and econometrics related R packages. *Stats*, 8(4):85, 2025. doi: 10.3390/stats8040085.
- Arpit Narechania, Arjun Srinivasan, and John Stasko. NL4DV: A toolkit for generating analytic specifications for data visualization from natural language queries. *IEEE Transactions on Visualization and Computer Graphics*, 27(2):369–379, 2021. doi: 10.1109/TVCG.2020.3030378.
- Amine Nejjar, Lorenz Zacharias, Fabian Stiehle, and Ingo Weber. LLMs for science: Usage for code generation and data analysis. *Journal of Software: Evolution and Process*, 36(9):e2723, 2024. doi: 10.1002/smr.2723.
- Ollama Inc. *Ollama: Run Large Language Models Locally*, 2024. URL <https://ollama.ai>.
- OWASP Foundation. OWASP MCP top 10, 2025. URL <https://owasp.org/www-project-mcp-top-10/>. Security risks for Model Context Protocol implementations.
- Shishir G. Patil, Tianjun Zhang, Xin Wang, and Joseph E. Gonzalez. Gorilla: Large language model connected with massive APIs. *arXiv preprint arXiv:2305.15334*, 2023. URL <https://arxiv.org/abs/2305.15334>.
- Shishir G. Patil, Tianjun Zhang, Xin Wang, and Joseph E. Gonzalez. Gorilla: Large language model connected with massive APIs. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, 2024. URL <https://gorilla.cs.berkeley.edu>. Berkeley Function Calling Leaderboard.
- Pola-rs Contributors. **polars**: Blazingly Fast DataFrames in Rust and Python, 2024. URL <https://pola.rs/>. Version 0.46.
- Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, Sihan Zhao, Lauren Hong, Runchu Tian, Ruobing Xie, Jie Zhou, Mark Gerstein, Dahai Li, Zhiyuan Liu, and Maosong Sun. ToolLLM: Facilitating large language models to master 16000+ real-world APIs. *arXiv preprint arXiv:2307.16789*, 2024. URL <https://arxiv.org/abs/2307.16789>.
- Changle Qu, Sunhao Dai, Xiaochi Wei, Jun Xu, Hengyi Cai, Shuaiqiang Wang, Dawei Yin, and Ji-Rong Wen. Tool learning with language models: A comprehensive survey of methods, pipelines, and benchmarks. *Vicinearth*, 2025. doi: 10.1007/s44336-025-00024-x.

- R Core Team. *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria, 2024. URL <https://www.R-project.org/>.
- Rust Foundation. The Rust programming language, 2024. URL <https://www.rust-lang.org/>.
- rust-ml Contributors. *linfa: A Rust Machine Learning Framework*, 2024. URL <https://github.com/rust-ml/linfa>. Rust crate.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. *arXiv preprint arXiv:2302.04761*, 2023. URL <https://arxiv.org/abs/2302.04761>.
- Douglas Staiger and James H. Stock. Instrumental variables regression with weak instruments. *Econometrica*, 65(3):557–586, 1997. doi: 10.2307/2171753.
- James H. Stock and Motohiro Yogo. Testing for weak instruments in linear IV regression. In Donald W. K. Andrews and James H. Stock, editors, *Identification and Inference for Econometric Models: Essays in Honor of Thomas Rothenberg*, pages 80–108. Cambridge University Press, Cambridge, 2005. doi: 10.1017/CBO9780511614491.006.
- Liyang Sun and Sarah Abraham. Estimating dynamic treatment effects in event studies with heterogeneous treatment effects. *Journal of Econometrics*, 225(2):175–199, 2021. doi: 10.1016/j.jeconom.2020.09.006.
- Maojun Sun, Ruijian Han, Binyan Jiang, Houduo Qi, Defeng Sun, Yancheng Yuan, and Jian Huang. LAMBDA: A large model based data agent. *Journal of the American Statistical Association*, 2025a. doi: 10.1080/01621459.2025.2510000. Online first.
- Maojun Sun, Ruijian Han, Binyan Jiang, Houduo Qi, Defeng Sun, Yancheng Yuan, and Jian Huang. A survey on large language model-based agents for statistics and data science. *The American Statistician*, 2025b. doi: 10.1080/00031305.2025.2561140. Online first.
- Chris Thornton, Frank Hutter, Holger H. Hoos, and Kevin Leyton-Brown. Auto-WEKA: Combined selection and hyperparameter optimization of classification algorithms. In *Proceedings of the 19th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 847–855, 2013. doi: 10.1145/2487575.2487629.
- G. N. Wilkinson and C. E. Rogers. Symbolic description of factorial models for analysis of variance. *Journal of the Royal Statistical Society: Series C (Applied Statistics)*, 22(3):392–399, 1973. doi: 10.2307/2346786.
- William A. Woods. Progress in natural language understanding: An application to lunar geology. In *Proceedings of the AFIPS National Computer Conference*, pages 441–450, 1973. doi: 10.1145/1499586.1499695.
- Jeffrey M. Wooldridge. *Econometric Analysis of Cross Section and Panel Data*. MIT Press, Cambridge, MA, 2nd edition, 2010.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *Proceedings of the 11th International Conference on Learning Representations (ICLR)*, 2023. URL <https://arxiv.org/abs/2210.03629>.
- Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, Zilin Zhang, and Dragomir Radev. Spider: A large-scale

- human-labeled dataset for complex and cross-domain semantic parsing and text-to-SQL task. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3911–3921, 2018. doi: 10.18653/v1/D18-1425.
- Achim Zeileis. Econometric computing with HC and HAC covariance matrix estimators. *Journal of Statistical Software*, 11(10):1–17, 2004. doi: 10.18637/jss.v011.i10.
- Achim Zeileis and Roger Koenker. Econometrics in R: Past, present, and future. *Journal of Statistical Software*, 27(1):1–5, 2008. doi: 10.18637/jss.v027.i01.
- Victor Zhong, Caiming Xiong, and Richard Socher. Seq2SQL: Generating structured queries from natural language using reinforcement learning. In *arXiv preprint arXiv:1709.00103*, 2017. URL <https://arxiv.org/abs/1709.00103>.