Cody / From connection to decision

Retain the PC; distinguish notification, choice and delivery confirmation.

Retain the PC, then receive its work

Keep pairing, LAN presence and activity from the last genuine prompt separate. The EVENT extension carries explicit notices and questions; it does not invent a chat when a hook is missing. The declared context is a label.

Decide only after reading

Codex needs you opens two or three choices. Selecting one opens a summary with Send and Back. Reply sent appears only after the recipient's ACK. A question lasts 180 seconds; expiry never chooses for the user.

PRs remain read-only

Keep decision A03: screens 21-24 show states and failed check names. Screen 25 is retired; PR diagnosis and actions remain on the PC. Native approvals point to On your PC, with no Allow or Deny on Cody.

How to read this revision


The main pages and flow limits have been updated. Earlier addenda are preserved and dated errata added. Source contracts, host evidence and physical evidence remain distinct; current outcomes are recorded in done.md.

From the code to the retained PC


Screens 12 -> 13 -> 14 -> 15 / association and presence are different facts.



CODE

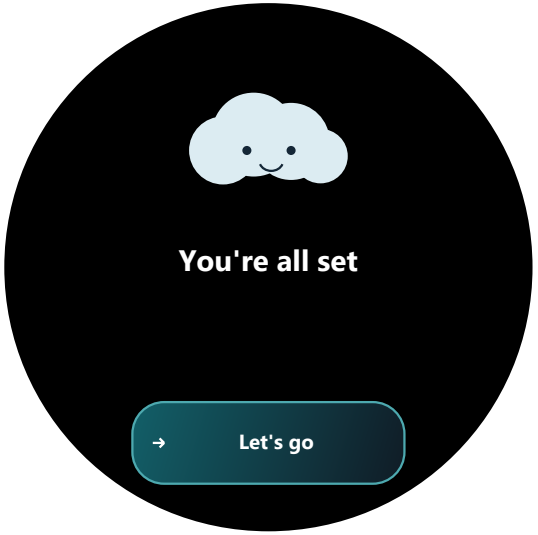

ALL-SET

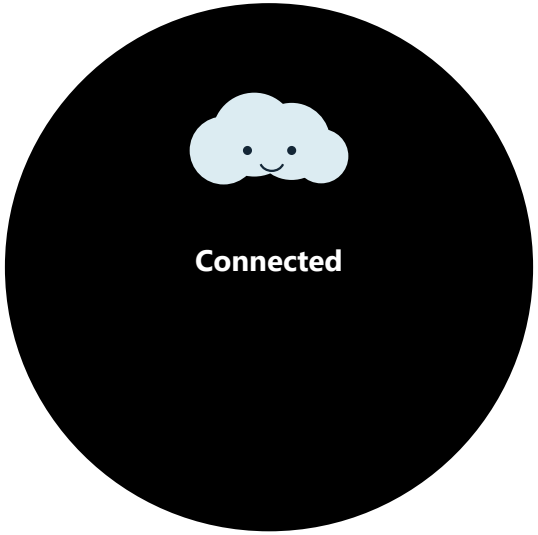

CONNECTED

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Before connecting Codex

Screens 04-09 and 42 / provisioning is separate from Codex pairing.

A real local connection

09 offers Continue only with valid current Wi-Fi/IP. No connection on 42 offers Network setup or Later. CCP needs the local LAN; public Internet availability is a separate fact. Debug handoff 39 needs a fresh tap; Release continues to 09.

Reopen choices

Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share one row; Options is centered below. Release the opening contact before selecting. Back retraces the valid previous route.

Wait for the actual secure code

Screens 12 -> 13 -> 14 -> 15 / association and presence are different facts.



CODE

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Pair from the right PC

Discover Cody first; then use only the code visible on the device.

Ask Codex to connect it

With CCP active, ask to discover Cody and pair it using the current code. The physical device is the source; never retrieve old codes from images or documents.

Find exactly one device

The code must match exactly one current offer. With zero or multiple matches, keep the error explicit. Never choose whichever responds first.

Wait for the result


Keep the code screen open. An admitted request is not completed pairing: wait for storage and confirmation on both sides.

Then send ordinary work


Automatically follow the chat of the last genuine prompt. If Waiting for Codex appears, check hooks and local execution; changing pairing does not create events.

All set, then connect immediately

Screens 12 -> 13 -> 14 -> 15 / association and presence are different facts.

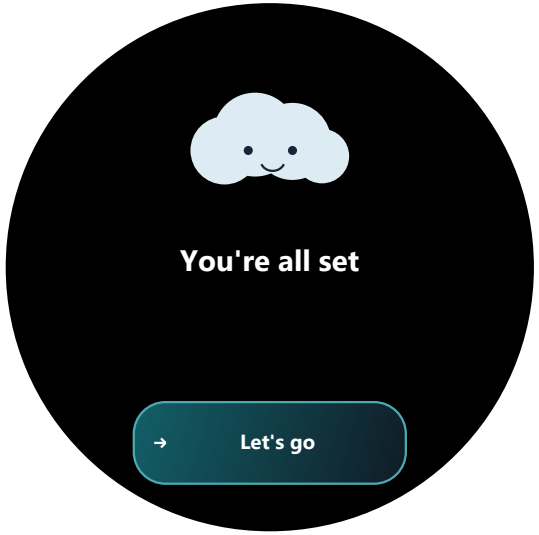

ALL-SET

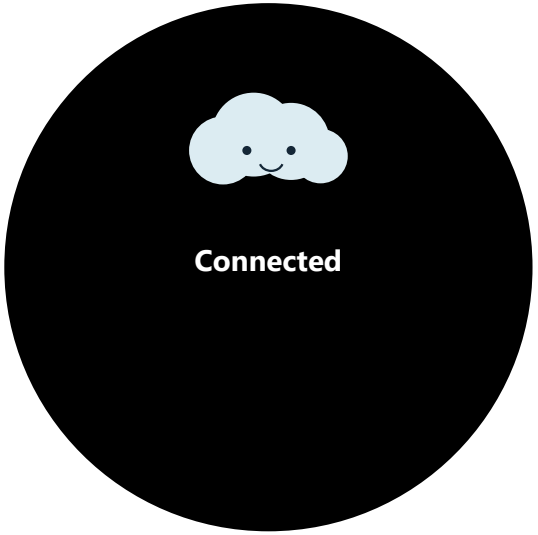

CONNECTED

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.


Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.


STATIC SCHEMATICS / illustrative fonts and values / no device capture

Setup keeps the saved PC explicit


Screen 41, decision 40 and retained-pairing variants / no implicit replacement.

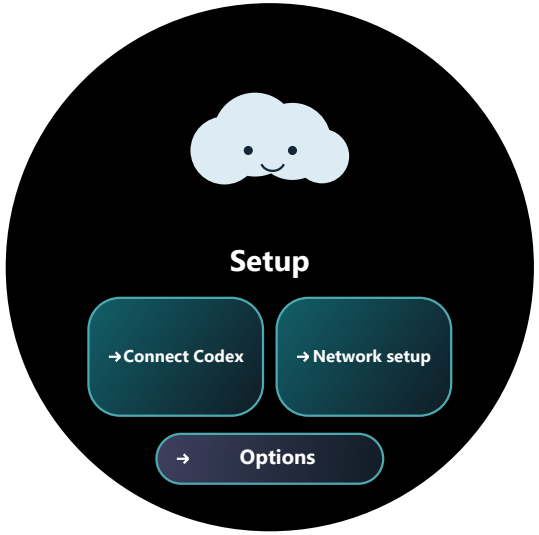

SETUP

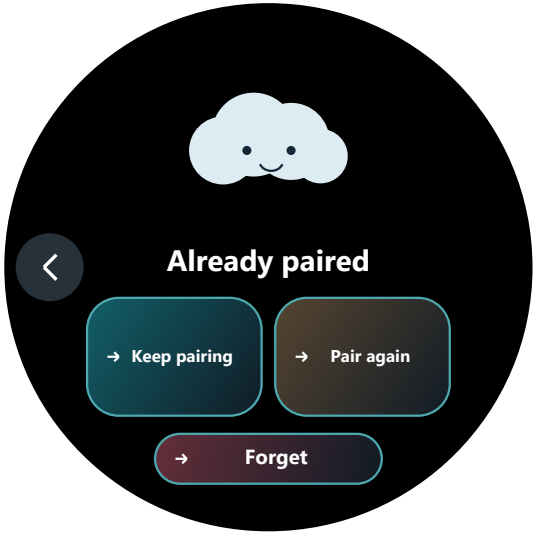

RETAINED

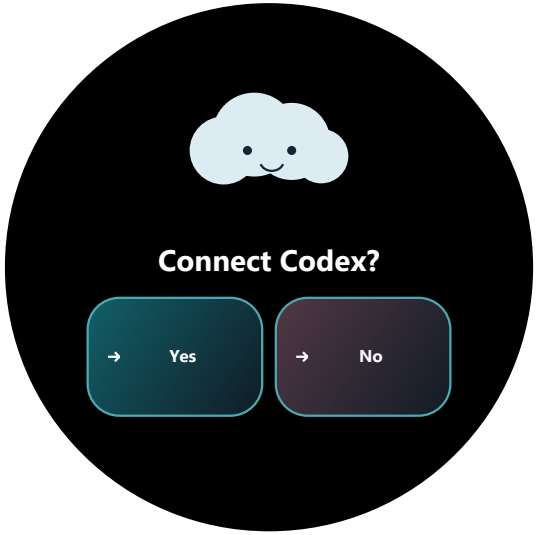

CHOICE

Reopen choices

Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share one row; Options is centered below. Release the opening contact before selecting. Back retraces the valid previous route.

Keep, replace or forget

Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Search the same retained PC

Screen 14 / absence of a PC is not absence of pairing.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

Keep, replace or forget


Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

08 / 100 PCs. One chosen connection.

You choose by pairing from your Codex PC. Cody then remembers that relationship.



ONE NETWORK

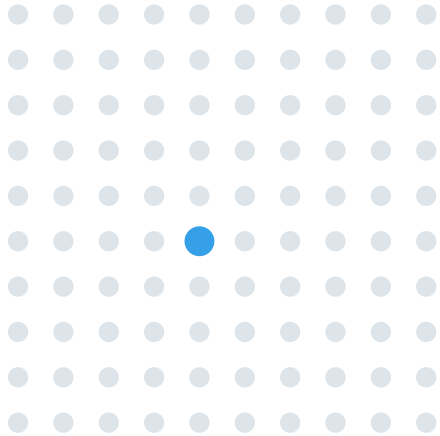

100 PCs / 1 paired

Other PCs stay outside this connection.

Cody follows the saved pairing, regardless of which PC answers first.

SHARED OFFICE / MANY-PC NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Connected: notices and questions

Screens 15, 26 and 27 / the context label is not chat identity.

26 / Codex needs you

Receive a question from the explicit MCP caller; notices show From Codex. Read English ASCII text. The caller declares context, without claiming verified chat or hook identity.

26 -> 27 / Open the question

Open shows two or three answers and their descriptions. Keep one open question per device. Activity, later notices and battery indicators cannot replace it.

Approvals / On your PC

PermissionRequest can draw attention, but the native decision remains on the computer. Do not add Allow, Deny or generic authorization inferred from incomplete text.

A notice is not an answer

A notification offers no choices and produces no REPLY. Reply sent is reserved for delivered answers. PRs admit only the states and read-only list defined by A03; no operational actions.

Offline never answers for you

Screens 26/27, 32 and 35A/35B / preserve the route and respect expiry.

Protected question

An open question takes priority over ordinary updates. Preserve selection and route. Battery, charging or a later notice cannot remove a decision the user still needs to read.

32 / Offline

Keep the content and search for the saved PC. Expiry continues: returning to the LAN never renews the 180 seconds. Timeout, Cancel and disconnection neither choose an option nor confirm delivery.

Expiry and cancellation

Before Send, show Request expired; after Send, Reply unconfirmed and Check on your PC. Use Request cancelled or Reply rejected for other outcomes, with Done. Terminal states never reopen.

35A / 35B and new notices

Keep Wi-Fi during paired Cody standby. Queue wake for an authenticated notice to the power worker, preserving AFE and wake word. Record physical wake outcomes separately.

Retry the failed operation

Screens 08, 12, 14 and 40 / preserve the original error and identity.

Show QR, then Pair Cody

05 opens the installation QR on 06 without starting radios. Pair Cody starts Bluetooth on 07. A session QR appears only at ReadyToScan, then retires when credentials or connection are in progress. Cancel waits for confirmed cleanup.

Save before confirming

Next opens Settings: Personalization / Choose Cody's look. Continue opens Skin: Pearl Mist, Aurora Veil, Cosmic Stardust, Enchanted Mosaic and Dreamwave, saved by stable ID. Saving retains the prior value; successful write/readback confirms the change. Save failed and Retry preserve the cause and requested value; no silent repair.

Keep, replace or forget

Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

Who confirms the answer?

Screen 31 / the MCP recipient must acknowledge receipt.

Private ticket and capability

The MCP caller creates a 128-bit ticket with a private capability. Poll and cancel require both values. The capability stays on the PC and never travels over the LAN.

received is not delivered

Polling returns the choice and answer_id. A later poll with matching acknowledge_answer_id proves caller receipt: only then does the state become delivered and open screen 31.

Sending and repeats

After pending, enter local Sending without changing the choice. Received is not yet delivered. Repeating the same answer is idempotent; a different answer never overwrites the first.

Expiry and uncertain delivery

The 180-second limit also applies in received. If Send was already admitted, show Reply unconfirmed: only the ACK may be missing. Before Send, use Request expired. Neither Retry nor a late ACK reopens the question.

13 / Sketch the next refinement

Use this page to mark decisions, redraw a moment, or capture what feels unclear.

DEVICE

PC / CODEX

CONNECTION FLOW

DECISIONS TO KEEP

OPEN QUESTIONS

Visual references: Cody Planning Atlas v1 and Navigation Atlas v1. Connection flow: current CCP source checkpoint.
AI-generated concept scenes and illustrative screen layouts; device, PC and LAN behavior still require runtime validation.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Startup: two saved decisions

Local Wi-Fi/IP first. Then the retained Codex pairing. Public Internet is not required.

1 / No saved Wi-Fi profile

A valid absent-profile observation opens 04 > 05 > 06 > 07 > 09. Debug may show 39 before 09. Continue: 10 > 36 > 11 (skin), then the Codex decision.

2 / Saved Wi-Fi; waiting for the network


42 / No connection keeps the profile while the Wi-Fi owner reconnects. Network setup reopens 04-09; Later returns to Idle. Invalid/stale data shows UNAVAILABLE.

3 / LAN ready; no saved Codex pairing

40 / Connect Codex? Yes starts the code on 12. No returns to 16 / Idle without a settings write or CCP request. The next boot may ask again.

4 / LAN ready; saved Codex pairing

Adopt the saved attempt and search on 14. Only authenticated READY enters 15. A retained identity alone never means the PC is connected.

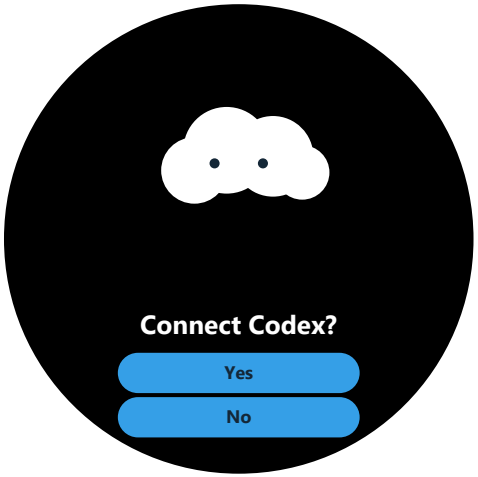

40 / Explicit Yes or No

Illustrative UI. Choice controls do not start pairing until the user acts.

Reopen setup from Cody

Hold the visible character still for 1.5 seconds. No button-based factory reset is added.

41 / Setup

Connect Codex opens a fresh display-code attempt. Network setup reopens 04-09. Left Back returns to Idle. Opening or leaving the menu erases no Wi-Fi, skin or pairing.

Keep the gesture deliberate


Available from stable Idle, PC search/connected and terminal CCP errors. Moving more than 12 px, a sample gap over 250 ms, rotation or a lifecycle interruption cancels the hold. Busy work and active provisioning are excluded; release before choosing.

PWR / existing policy

Single: standby/wake; active Debug defaults to screenshot countdown. Long release: standby. Debug double within 500 ms, or a continuous 3-second hold: restart preserving data.

BOOT / existing policy

Short: restore a dim/sleeping panel first, otherwise toggle fullscreen/status arcs. Hold 3 seconds: Debug restart; Release has no firmware reset action. Saved Wi-Fi and CCP survive restart.

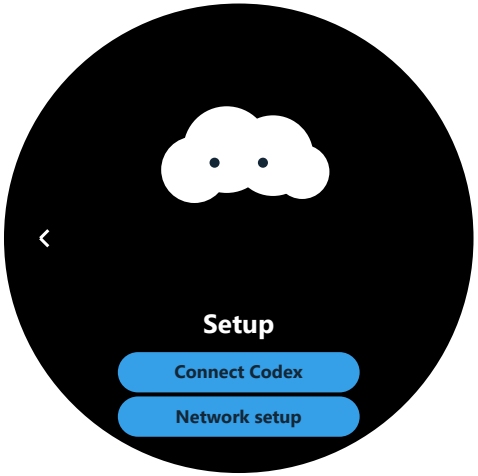

41 / Reversible setup access

Illustrative UI. A true factory erase is a separate explicitly requested operation.

Errata and corrections

Revision date: 09 October 2026 / CODY-SETUP-20261009

Original analysis gap

The initial analysis omitted startup with Wi-Fi already configured but no saved Codex pairing, and did not define a reversible user entry to setup. This was an original analysis gap, now addressed in source.

Affected original pages and screen IDs

Original pages 02 (whole journey), 03 (prerequisites), 04 (code), 07-08 (Idle/search), 11 (returning PC) and 13 (owners); screens 11-16.

Corrections

Add 40 / optional Yes-No Codex choice, 41 / character-hold Setup, and 42 / reconnect wait. 09 means local Wi-Fi/IP; 11 selects a skin. No/Later performs no persistence or new CCP request. Saved pairing returns to 14 and requires authenticated READY for 15. PWR/BOOT do not clear pairing.

Preservation

All 14 previous pages, earlier corrections, bookmarks and unrelated content are retained. This dated addendum supersedes only the cited startup/setup/install statements; the original numbering stays stable.

Evidence and limits

Firmware source implementation and static integration review completed. PDF pages rendered and visually reviewed. No firmware tests, validation scans, configure/build/size, simulator execution, device pairing/input, flash or erase accompanied this revision. Runtime validation is pending.

Setup after standby

Hold Cody for 1.5 seconds to choose Network setup or Connect Codex.

04-06 / Escape the network loop


After inactivity, Welcome previously sent its first touch straight back to Let's pair. Welcome now opens 41 on a stationary tap release. A character hold also opens 41 from timeout Welcome, Let's pair or the installation QR page when no operation is busy.

35B / Wake, then hold

A finger already down during wake starts its 1.5-second hold only on a fresh acquired sample with the restored visible character. Hidden standby/wake time never counts. Movement over 12 px, report gaps over 250 ms or rotation cancel the hold. Release before choosing.

41 / Two explicit destinations

Upper Connect Codex opens 12 and its six-character CCP code using the local Wi-Fi/IP connection. Lower Network setup explicitly opens 04-09. No Internet probe is required. Active provisioning, worker admission and pending cancellation block menu access.

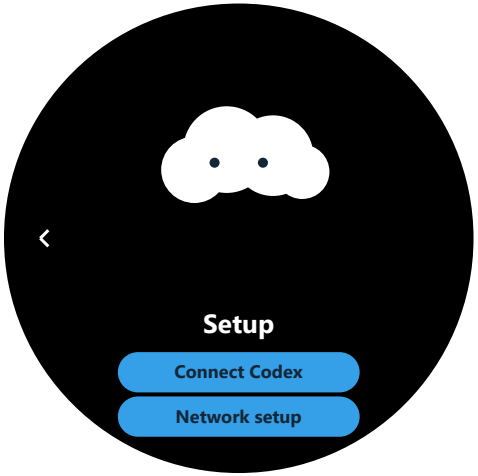

41 / Same choices after wake

Illustrative UI. Existing credentials and retained CCP pairing are preserved.

Errata and corrections

Revision date: 09 October 2026 / recovery correction

Original analysis gap

The first analysis did not reconcile the legacy Welcome timeout/touch path with reopening setup after standby. This was an original analysis gap.

Affected pages and screens

Previous setup addendum: page 16. Affected screen IDs: 04, 05, 06, 12, 35B and 41. Earlier dated errata remain intact.

Corrections

Timeout Welcome tap release and stationary character holds on resting 04-06 reopen 41. A hold spanning wake starts only after visible restoration. Connect Codex goes to 12; Network setup goes to 04-09. Busy work and pending cleanup cannot be bypassed.

Evidence and limits

A user-authorized 90-second passive serial capture confirmed LAN/DHCP, Welcome inactivity return and standby. No Connect Codex press occurred in that capture; the initial wrong-selection report remains unresolved. The correction has static source review; corrected physical behavior still needs observation.


Preservation

All 17 preceding pages, prior errata and unrelated content are retained. This addendum supersedes only the cited escape/gesture behavior. Saved credentials are not erased.

Cody action language

IMPORTANT UI DECISION / approved 09 October 2026 / binding for future screens



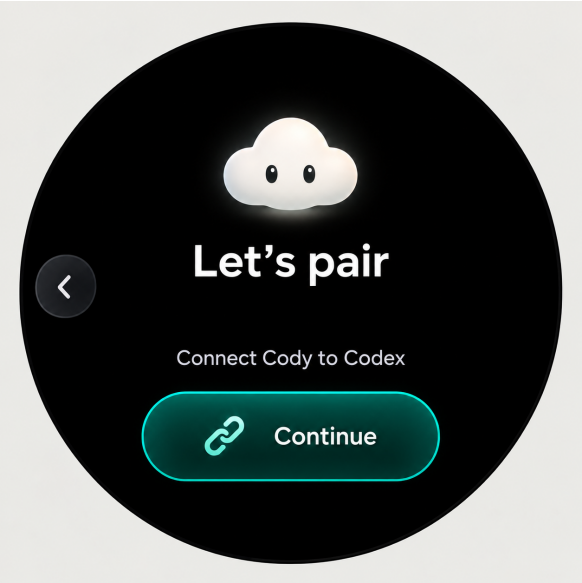

Layout rule

Two actions: rounded cards side by side. Three: the same pair plus one centered action below. One: a wide centered capsule with its icon left of the label.

Shared visual language

Dark restrained gradients, thin semantic borders, white labels and action icons. Teal: affirmative/Codex; blue: network; graphite: No/Later/Options; amber: Retry/Cancel.

Circular geometry

Keep Back separate at the left. Share rendering and touch bounds in every orientation. QR pages keep the quiet zone and use the compact single-action variant.

Options and touch continuity

Setup keeps Network setup and Connect Codex distinct. Options opens screen 10.

41 / Setup

Left card: Connect Codex. Right card: Network setup. Centered third action: Options. Options opens 10 / Make it yours, then 36 and 11 / skin. Done returns to Setup; Back retraces this local preferences path. No network or Codex association is erased or implicitly started.

40 / Connect Codex? and 42 / No connection

Yes/No and Network setup/Later are side by side, with purpose-specific icons and colors. Their existing explicit backend admission stays intact. Screen IDs 05-15 and 36 share the action styling where an action is present.

Observed freeze / original cause

An authorized 90-second reset/capture recorded Yes at 16497 ms, entry to Connect Codex at 16498 ms, then a CST9217 report with fifteen FF bytes and ACK=FF at 17112 ms (expected AB). ESP_ERR_INVALID_RESPONSE stopped the renderer. LAN/IP was ready.

Scoped runtime correction

The touch owner still rejects malformed reports and publishes the real error. After startup only, that acquisition error is optional for rendering. Discard queued gesture reports, cancel the gesture and require a real acquired release before another press. No release is invented. The same acquisition error can mean an I2C NACK; its origin is not inferred. Startup, other acquisition errors, locks and route failures remain terminal.

Evidence boundary

Native source integration and approved mockups are documented here. The underlying cause of the FF report and corrected physical touch/standby behavior remain unverified. A successful build/flash alone does not establish those outcomes.

Errata and corrections

Revision date: 09 October 2026 / important UI decision and touch correction

Important design decision

The user approved the two-column pair plus centered third action, and the wide single action with icon to the left. These are binding layouts from this revision onward. Gradients, icons and semantic colors are required across Cody screens.

Affected original material

Original pages 02 (whole journey), 03 (prerequisites), 04 (code), 07-08 (Idle/search), 11 (returning PC) and 13 (owners); screens 11-16. Also affected: screens 05-15, 35B, 36 and 40-42. Earlier stacked-blue control illustrations are superseded only in their action layout/styling.

Original analysis gaps

The initial analysis omitted Options re-entry and did not distinguish an optional malformed runtime touch report from renderer failure. This was an initial analysis gap. Options now opens 10 and returns to Setup after preferences/skin.

Corrections and limits

Yes/No become horizontal and semantic. The measured invalid touch report retains its original error while rendering continues with interrupted gestures. Hardware FF root cause and physical corrected behavior remain open.

Preservation

All 19 preceding pages, earlier errata and unrelated content remain unchanged. Approved images are design references, not physical device screenshots.

Follow one Codex chat

10 October 2026 / CCP 0.3 / screens 16-20 and 32

Codex hooks	CCP runtime	Cody snapshot

Install and trust

Update CCP to 0.3. Review and trust its hooks in Codex. Installation alone does not trust them. The hidden PC runtime is shared by open chats; the saved device pairing remains intact.

Choose the chat

Send a prompt, list observed sessions, then explicitly select one session ID and paired Cody. Supply a short ASCII project label. Another chat cannot replace that selection. Runtime restart requires selection again.

Read actual activity

17: project active. 18: working, editing or running. 19: response ready, not task success. 20A: paused or awaiting approval. 20B: session ended, then 16 after five active seconds. 32: paired PC lost.

Freshness and scope

The device receives authenticated snapshots every two seconds. Missing packets expire after eight seconds; active hook observations expire after 120 seconds. UNAVAILABLE is explicit. Messages, answers, PR data, branch acquisition and voice transcription remain future work. Physical behavior is pending.

Errata and corrections

Revision date: 10 October 2026 / authenticated chat activity

Affected original material

Original pages 10-11 and 13; screen 15 and reconnect ownership.

Analysis gap corrected

Screen 15 originally proved PC presence only. The initial analysis omitted explicit chat selection, shared runtime lifetime and event freshness. This was an initial analysis gap; it is now addressed in source.

Contract and UI

CCP 0.3 adds metadata-only hooks, exact session selection and nonce-bound ACTIVITY messages. The canonical snapshot owns validity and errors. 18U adds the unavailable state. Setup re-entry preserves the selected context.

Evidence and limits

The user confirmed Connected on 10 October after real pairing. That evidence belongs to the previous firmware and CCP 0.2. New code is implemented; host checks, hook trust/autoload and physical 0.3 behavior are not established here. A response-ready event is never reported as task success.

Preservation

All 22 previous pages and earlier errata remain unchanged. The approved gradient/icon action layouts remain binding. These diagrams describe architecture, not captured device pixels.

Addendum / retained pairing

Decision record / 10 October 2026 / screens 04-16, 35B, 36 and 40-42.

First boot / Configured device

Without saved Wi-Fi, open 04-09. With credentials but no IP, use 42. With LAN and no pairing, offer 40. With a valid record, resume 14-15 without checking the Internet.

Setup / Consent to replace

Open 41 by holding the character for 1.5 seconds. With saved pairing, show Already paired: Keep pairing, Pair again or Forget. Retry resumes discovery without a new code.

Pairing / Presence / Activity

Screen 13 confirms pairing. Let's go immediately searches for the PC. Screen 15 confirms CCP and waits for a genuine prompt. Hooks follow its chat automatically; manual selection has been removed.

Options / Local choices

Open Make it yours from Options and reuse Settings and Skin. Return to the correct caller. Keep preferences, PC replacement and any explicit deletion separate.

Addendum / recovery cases

Screens 14-16, 18U, 32, 35A/35B and 42 / retain the saved identity.

Internet unavailable; LAN works

Continue using the local Wi-Fi/IP link between Cody and CCP. Codex online service availability is separate: PC presence on the LAN does not guarantee a model response.

Wi-Fi or IP missing

Retain credentials and the paired PC. At startup, show 42 with Network setup or Later. During recovery, wait for the LAN and retry using the saved identity. Real transport errors remain visible in state.

PC or CCP missing

Continue discovery on 14; use 32 for loss after tracked activity. Retry resumes discovery without a new code. Holding Cody for 1.5 seconds can still open Setup.

35A / 35B and firmware updates

Ordinary standby preserves route and pairing. Wake restores authenticated presence. A normal application flash preserves NVS; erasure, damaged data or a different PC identity are distinct cases.

Addendum / confirm and reset

Screens 12, 13, 40 and 41 / keep network, skin, settings and logs.

Two candidates; active links kept

On the PC, save the DPAPI candidate before PAIR; Cody uses ccp_pending. Keep previous active records separate. CONFIRM or fresh READY proves the PC and permits commit and readback on Cody.

Complete with proof of commit

The PC promotes after authenticated ACTIVE or COMMITTED, never FIND alone. After each valid READY, Cody repeats COMMITTED with the current nonce, recovering restarts and lost ACKs without a new code.

Cancel / End the attempt

Once the code is ready, discard Cody's candidate. Keep the previous link operational; the PC candidate stays pending. Replacement requires a new code and explicit replace_pending:true. Proof using the old key does not authorize deletion.

Forget / Codex pairing only

Confirm Forget pairing with Go back / Forget and Only Codex is reset. Delete only Cody's CCP records; the PC keeps its record. After the real outcome, show Unpaired / Pairing removed, then Done -> Setup.

Errata and corrections

Revision date: 10 October 2026 / CODY-RETAINED-FLOW-20261010

Original pages 1, 2, 3, 4, 5, 6, 7, 8, 10, 11, 12, 13

The current flow is integrated into the main pages, preserving unrelated pages and all earlier addenda/errata. Routes refer to screen IDs even when pagination changes.

Screens 10-16, 32, 35B and 40-42

Options saves four preferences; Already paired offers Keep pairing, Pair again and Forget. Retry, Cancel and reset are separate. Separate journals and COMMITTED prove the real commit. Let's go searches immediately.

Initial analysis gap and responsibility

Commissioning, recovery and activity were conflated without confirming replacement. These decisions are now explicit. CCP follows the genuine prompt; the former manual chat choice is retired.

UI decision and evidence

Keep the approved language: gradients, icons, a horizontal pair or single capsule, and buttons without teletype. This revision updates source and documents; device, hook and simulator checks still required are listed separately.

Addendum / notices and decisions

Revision: 10 October 2026 / screens 26, 27 and 31.

26 / Codex needs you and Open

Show the declared context, title and notice. The request has its own ticket and lasts 180 seconds. Opening or closing a view never extends expiry or selects an answer.

27 / Choose a reply

Use two cards side by side; with three, add one centered below. Each choice has a stable ID and its own meaning. Back returns to 26 and keeps the question without sending.

27 / Review choice

A choice opens a summary with a description and Send capsule. Back returns to the options. After Send, keep the choice fixed and show Sending reply. Do not add a fourth button below three cards.

31 / Reply sent after delivery

The received UDP ACK leaves Waiting for Codex: CCP recorded the choice. Only delivered shows Reply sent and Delivered to Codex; Done resumes previous context 17, 18 or 16.

Addendum / read-only PRs

A03 remains in force / screens 21-24; 25 retired.

21 / PR pending

Observe only the specified PR. Keep the exact head from the explicit snapshot supplied by Codex. Stop is not check evidence; no merge, approve, close, rerun or comment actions are offered.

22 / Checks running and Checks passed

Show counts only from a complete current list on the same head. Checks passed has no buttons: wait until the narrative finishes, then three seconds, before returning to work.

23 -> 24 / View failures

The sole action opens actual failed check names: at most six, each up to 48 ASCII characters. Reject unrepresentable input explicitly; never truncate names or invent totals.

24 read-only / 25 retired

Show three names per page, up to two lines each; scroll vertically and keep lateral Back. No View log or selectable rows. Logs, diagnosis and corrections stay on the PC.

Addendum / delivery and commands

Screen 31, 32 and fresh setup / distinguish acceptance from outcome.

received is not delivered

Polling returns the choice and answer_id. A later poll with matching acknowledge_answer_id proves caller receipt: only then does the state become delivered and open screen 31.

Expiry and uncertain delivery

The 180-second limit also applies in received. If Send was already admitted, show Reply unconfirmed: only the ACK may be missing. Before Send, use Request expired. Neither Retry nor a late ACK reopens the question.

Explicit restart / data retained

Write 'restart the device code 043533477' in the current message: nine digits, including zero. This prevents ambiguity; it is not a password and must not be completed from documents. Use the paired LAN peer and preserve data. ACK = accepted; boot = fresh presence.

Factory reset / initial setup

With 'format cody 043533477', erase preferences, Wi-Fi and pairing; keep firmware, assets and SD. ACK means admission. Restart only after verified erasure, then return to Wi-Fi setup. An error stays visible and prevents reboot.

Errata and corrections

Revision date: 10 October 2026 / CODY-NOTIFICATIONS-20261010

Original pages 1, 10, 11, 13

Affected main pages are updated, preserving unrelated flow pages and earlier addenda. References use screen IDs.

Screens 21-27 and 31-32

Apply A03: read-only PRs and retired screen 25. Remove View log and the old vertical list. Screen 27 now has cards and a Send summary; 31 requires delivered after the recipient's ACK.

Initial analysis gap

Receipt, delivery and expiry were ambiguous, alongside outdated PR illustrations. Tickets, received/delivered and the 180-second limit now separate them. Timeout and offline never select answers.

History, commands, evidence

Restart and factory reset are separate: restart preserves data; reset clears configuration and returns to setup. ACK means admission. Preserve history and real errors; host and physical outcomes are in done.md.

Addendum / boot and Wi-Fi

Revision date: 10 October 2026 / branding, 01-09 and 42.

Identity and timing

Cody AI Companion and A distraction-free sidekick appear together, above the complete floppy artwork. The original 42-frame animation retains its 3.5-second cycle; startup work can extend wall time.

Layout and next route

Title y=60; subtitle y=110; artwork (137,164), 192 x 219. After local startup, absent Wi-Fi opens Welcome 04; missing association/IP opens 42; a valid LAN without pairing opens 40; retained pairing searches its PC on 14.

Show QR, then Pair Cody

05 opens the installation QR on 06 without starting radios. Pair Cody starts Bluetooth on 07. A session QR appears only at ReadyToScan, then retires when credentials or connection are in progress. Cancel waits for confirmed cleanup.

A real local connection

09 offers Continue only with valid current Wi-Fi/IP. No connection on 42 offers Network setup or Later. CCP needs the local LAN; public Internet availability is a separate fact. Debug handoff 39 needs a fresh tap; Release continues to 09.

Addendum / pairing and connection

Revision date: 10 October 2026 / screens 12-15, 40 and 41.

Reopen choices

Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share one row; Options is centered below. Release the opening contact before selecting. Back retraces the valid previous route.

Keep, replace or forget

Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

Addendum / settings and controls

Revision date: 10 October 2026 / screens 10, 11, 36 and 41.

Four compact rows

Shake to wake, Auto-rotate and Sounds each have persistent On/Off values. Orientation shows Auto while auto-rotation is enabled; manual choices are 0 or 180 when it is Off. Sounds Off stops playback while keeping microphone and wake word active.

Save before confirming

Next opens Settings: Personalization / Choose Cody's look. Continue opens Skin: Pearl Mist, Aurora Veil, Cosmic Stardust, Enchanted Mosaic and Dreamwave, saved by stable ID. Saving retains the prior value; successful write/readback confirms the change. Save failed and Retry preserve the cause and requested value; no silent repair.

Controls appear together

Two actions use rounded gradient cards side by side; three add one centered action below. Single actions use an icon-left capsule. Captions have no teletype: controls and touch become available together after the title and main body line. QR quiet zones and local circular chords remain protected.

How to read the drawings

These are static documentation schematics derived from current source geometry and approved action references, not simulator frames or physical captures. Numeric values are layout coordinates, not sensor measurements. Firmware, simulator and device validation are outside this document revision.

Errata and corrections

Revision date: 10 October 2026 / CODY-SCREENS-20261010

Affected original pages

cody-codex-connection-atlas-v1.pdf: current pages 2, 3, 4, 6, 7, 8, 12. Original screen references: branding before 01-03; Wi-Fi 04-09/42; preferences 10/36/11; Codex 12-15/40/41. Page numbers and screen IDs are distinct.

Corrections recorded

Replace the old title-free/twofold boot illustration with the current title, subtitle and 192 x 219 artwork. Replace outdated setup, code preparation, connection detour and settings descriptions with the source-based contracts above.

Historical record

All earlier addenda and errata are preserved in their existing order, along with unrelated pages. Historical boot sizes and old next-route diagrams remain dated evidence; the revised current pages and this addendum supersede them only for these topics.

How to read the drawings

These are static documentation schematics derived from current source geometry and approved action references, not simulator frames or physical captures. Numeric values are layout coordinates, not sensor measurements. Firmware, simulator and device validation are outside this document revision.

Errata and corrections

Dated decisions, corrections and evidence. Historical entries retain their original scope.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
11 October 2026 **ERRATA**	**English throughout the document** Affected: Original pages 1, 5, 10, 11, 13, 17, 19, 22, 24, 25, 26, 27, 28, 29, 30, 31, 32 Historical Italian text, headings, diagram captions and footers are translated into English. Original dates, screen IDs, technical values, evidence limits and artwork are preserved. The language review also covers the English consolidated connection atlas, the four-page A5 pairing flyer and the manga status atlas; those documents require no language correction. Evidence / limits: Document language and visual review only; no firmware build, simulator or physical-device verification.